

# TYPES SN75234, SN75235

## DUAL SENSE AMPLIFIERS


FUNCTION TABLE

INPUTS		OUTPUT
A	S	W
H	H	L
L	X	H
X	L	H

### definition of logic levels

INPUT	H	L	X
A†	$V_{ID} \geq V_{T \max}$	$V_{ID} < V_{T \min}$	Irrelevant
S	$V_I \geq V_{IH \min}$	$V_I < V_{IL \max}$	Irrelevant

†A is a differential voltage ( $V_{ID}$ ) between A1 and A2. For these circuits,  $V_{ID}$  is considered positive regardless of which terminal is positive with respect to the other.

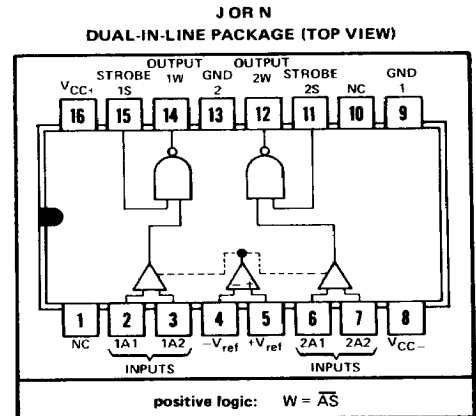

NC—No internal connection

### electrical characteristics (unless otherwise noted $V_{CC+} = 5 \text{ V}$ , $V_{CC-} = -5 \text{ V}$ , $T_A = 0^\circ \text{C}$ to $70^\circ \text{C}$ )

PARAMETER	TEST FIGURE	TEST CONDITIONS	MIN	TYP†	MAX	UNIT	
$V_T$ Differential-input threshold voltage (see Note 3)	24	$V_{ref} = 15 \text{ mV}$	SN75234	11	15	19	mV
			SN75235	8	15	22	
		$V_{ref} = 40 \text{ mV}$	SN75234	36	40	44	
			SN75235	33	40	47	
$V_{ICF}$ Common-mode input firing voltage (see Note 4)	none	$V_{ref} = 40 \text{ mV}$ , $V_I(S) = V_{IH}$ <i>Common-Mode Input Pulse:</i> $t_r \leq 15 \text{ ns}$ , $t_f \leq 15 \text{ ns}$ , $t_w = 50 \text{ ns}$		$\pm 2.5$		V	
$I_{IB}$ Differential-input bias current	2	$V_{CC+} = 5.25 \text{ V}$ , $V_{CC-} = -5.25 \text{ V}$ , $V_{ID} = 0$		30	75	$\mu\text{A}$	
$I_{IO}$ Differential-input offset current	2	$V_{CC+} = 5.25 \text{ V}$ , $V_{CC-} = -5.25 \text{ V}$ , $V_{ID} = 0$		0.5		$\mu\text{A}$	
$V_{IH}$ High-level input voltage (strobe inputs)	25			2		V	
$V_{IL}$ Low-level input voltage (strobe inputs)	25				0.8	V	
$V_{OH}$ High-level output voltage	25	$V_{CC+} = 4.75 \text{ V}$ , $V_{CC-} = -4.75 \text{ V}$ , $I_{OH} = -400 \mu\text{A}$	2.4	4		V	
$V_{OL}$ Low-level output voltage	25	$V_{CC+} = 4.75 \text{ V}$ , $V_{CC-} = -4.75 \text{ V}$ , $I_{OL} = 16 \text{ mA}$		0.25	0.4	V	
$I_{IH}$ High-level input current (strobe inputs)	26	$V_{CC+} = 5.25 \text{ V}$ , $V_{CC-} = -5.25 \text{ V}$ , $V_{IH} = 2.4 \text{ V}$			40	$\mu\text{A}$	
		$V_{CC+} = 5.25 \text{ V}$ , $V_{CC-} = -5.25 \text{ V}$ , $V_{IH} = 5.25 \text{ V}$			1	mA	
$I_{IL}$ Low-level input current (strobe inputs)	26	$V_{CC+} = 5.25 \text{ V}$ , $V_{CC-} = -5.25 \text{ V}$ , $V_{IL} = 0.4 \text{ V}$		-1	-1.6	mA	
$I_{OS}$ Short-circuit output current	27	$V_{CC+} = 5.25 \text{ V}$ , $V_{CC-} = -5.25 \text{ V}$	-2.1		-3.5	mA	
$I_{CC+}$ Supply current from $V_{CC+}$	6	$V_{CC+} = 5.25 \text{ V}$ , $V_{CC-} = -5.25 \text{ V}$ , $T_A = 25^\circ \text{C}$		25	40	mA	
$I_{CC-}$ Supply current from $V_{CC-}$	6	$V_{CC+} = 5.25 \text{ V}$ , $V_{CC-} = -5.25 \text{ V}$ , $T_A = 25^\circ \text{C}$		-15	-20	mA	

†All typical values are at  $V_{CC+} = 5 \text{ V}$ ,  $V_{CC-} = -5 \text{ V}$ ,  $T_A = 25^\circ \text{C}$ .

NOTES: 3. The differential-input threshold voltage ( $V_T$ ) is defined as the d-c differential-input voltage ( $V_{ID}$ ) required to force the output of the sense amplifier to the logic gate threshold voltage level.

4. Common-mode input firing voltage is the minimum common-mode voltage that will exceed the dynamic range of the input at the specified conditions and cause the logic output to switch. The specified common-mode input signal is applied with a strobe-enable pulse present.

# TYPES SN75234, SN75235 DUAL SENSE AMPLIFIERS

switching characteristics,  $V_{CC+} = 5\text{ V}$ ,  $V_{CC-} = -5\text{ V}$ ,  $T_A = 25^\circ\text{ C}$

PROPAGATION DELAY TIMES			TEST FIGURE	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SYMBOL	FROM INPUT	TO OUTPUT						
$t_{PLH(D)}$	A1-A2	W	40	$C_L = 15\text{ pF}$ , $R_L = 288\ \Omega$		25		ns
$t_{PHL(D)}$						25		
$t_{PLH(S)}$	STROBE	W	40	$C_L = 15\text{ pF}$ , $R_L = 288\ \Omega$		25		ns
$t_{PHL(S)}$						15		

typical recovery and cycle times,  $V_{CC+} = 5\text{ V}$ ,  $V_{CC-} = -5\text{ V}$ ,  $T_A = 25^\circ\text{ C}$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{orD}$	Differential-input overload recovery time (see Note 5) <i>Differential Input Pulse:</i> $V_{ID} = 2\text{ V}$ , $t_r = t_f = 20\text{ ns}$		20		ns
$t_{orC}$	Common-mode-input overload recovery time (see Note 6) <i>Common-Mode Input Pulse:</i> $V_{IC} = \pm 2\text{ V}$ , $t_r = t_f = 20\text{ ns}$		20		ns
$t_{cyc(min)}$	Minimum cycle time		200		ns

- NOTES: 5. Differential-input overload recovery time is the time necessary for the device to recover from the specified differential-input overload signal prior to the strobe-enable signal.  
6. Common-mode-input overload recovery time is the time necessary for the device to recover from the specified common-mode input overload signal prior to the strobe-enable signal.

## schematic

