
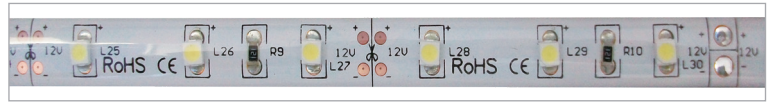


Single Colour 8mm LED Flexi Strip 8mm單色LED柔性軟燈條

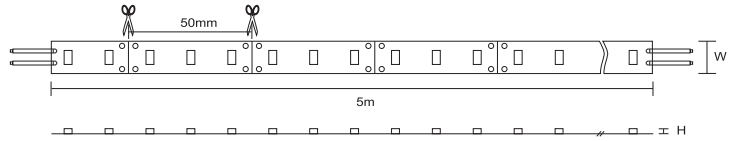

SMD 3528 12V 60LED/meter


Product Features:

- Super compact strip with SMD LED technology
- Available in 12V DC maximum
- Flexible Strip with 3M self-adhesive tapes at back for easy fixing
- 60pcs LEDs per meter, 5Mt per reel
- Cuttable every 50mm at the scissors symbol
- Maximum angle of bend 120
- Wide ambient temperature: -20°C...+65°C
- Average life 50,000 hrs

產品特點:

- SMD LED技術，超小緊湊
- DC12V直流供電
- 柔性光條，3M背膠，隨意安裝
- 每米60顆LED，顏色一致性高
- 每50mm剪刀標注位置可剪斷使用
- 最大發光角度120度
- 更寬的使用環境溫度-20°C...+65°C
- 50,000小時壽命

Connection Instructions

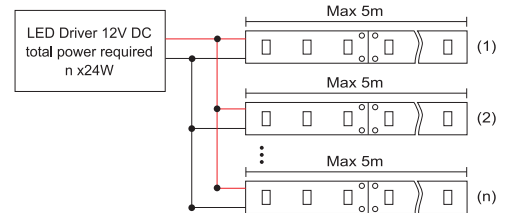

Model No. 型號	Colour 顏色	Input 輸入電壓 (V)	LED/Meter LED數/米 (PCS)	Power/Meter 功率/米 (W)	Lumens/Meter 流明/米 (lm)	Dimensions LxWxH 尺寸 (mm)	Length/ Cutttable Unit 長度/可切割 (mm)	Wave Length 波長 (nm)	Weight 重量 (g)	IP 防水等級
FL8-3528R-12-60-IP20	Red	DC 12V	60	4.8	90	5000x8x2.2	50	620	70	20
FL8-3528G-12-60-IP20	Green	DC 12V	60	4.8	180	5000x8x2.2	50	520	70	20
FL8-3528B-12-60-IP20	Blue	DC 12V	60	4.8	60	5000x8x2.2	50	470	70	20
FL8-3528W-12-60-IP20	Day Light 6000K	DC 12V	60	4.8	380	5000x8x2.2	50	—	70	20
FL8-3528NDL-12-60-IP20	Natural Daylight 5000K	DC 12V	60	4.8	350	5000x8x2.2	50	—	70	20
FL8-3528WW-12-60-IP20	Warm White 3000K	DC 12V	60	4.8	320	5000x8x2.2	50	—	70	20
FL8-3528R-12-60-IP65	Red	DC 12V	60	4.8	90	5000x8x3.5	50	620	190	65
FL8-3528G-12-60-IP65	Green	DC 12V	60	4.8	180	5000x8x3.5	50	520	190	65
FL8-3528B-12-60-IP65	Blue	DC 12V	60	4.8	60	5000x8x3.5	50	470	190	65
FL8-3528W-12-60-IP65	Day Light 6000K	DC 12V	60	4.8	380	5000x8x3.5	50	—	190	65
FL8-3528NDL-12-60-IP65	Natural Daylight 5000K	DC 12V	60	4.8	350	5000x8x3.5	50	—	190	65
FL8-3528WW-12-60-IP65	Warm White 3000K	DC 12V	60	4.8	320	5000x8x3.5	50	—	190	65
FL8-3528R-12-60-IP67	Red	DC 12V	60	4.8	90	5000x10x4.0	50	620	190	67
FL8-3528G-12-60-IP67	Green	DC 12V	60	4.8	180	5000x10x4.0	50	520	190	67
FL8-3528B-12-60-IP67	Blue	DC 12V	60	4.8	60	5000x10x4.0	50	470	190	67
FL8-3528W-12-60-IP67	Day Light 6000K	DC 12V	60	4.8	380	5000x10x4.0	50	—	190	67
FL8-3528NDL-12-60-IP67	Natural Daylight 5000K	DC 12V	60	4.8	350	5000x10x4.0	50	—	190	67
FL8-3528WW-12-60-IP67	Warm White 3000K	DC 12V	60	4.8	320	5000x10x4.0	50	—	190	67

