

CUSTOMER NOTIFICATION

SUD-TT-0228-1-E (1/76)

September 6, 2002

Koji Nishibayashi, Project Manager  
Microcomputer Tool Group  
System LSI Solutions Engineering Div.  
NEC Electron Devices  
NEC Corporation

CP (K), O

**IE-78K0K1-ET**

**Preliminary User's Manual**

**1st edition, September 2002**

**Windows is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries.**

**PC/AT is a trademark of International Business Machines Corporation.**

- The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
- NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device.

No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or of others.

Descriptions of circuits, software, and other related information in this document are provided for illustrative purposes in semiconductor product, operation and application examples. The incorporation of these circuits, software, and information in the design of the customer's equipment shall be done under the full responsibility of the customer. NEC Corporation assumes no responsibility for any losses incurred by the customer or third parties arising from the use of these circuits, software, and information.

## INTRODUCTION

**Product Overview** The IE-78K0K1-ET is designed to be used to debug the following target devices that belong to the 78K0 Series of 8-bit single-chip microcontrollers.

- 78K0/KB1 ( $\mu$ PD780103 Subseries):  $\mu$ PD780101, 780102, 780103, 78F0103
- 78K0/KC1 ( $\mu$ PD780114 Subseries):  $\mu$ PD780111, 780112, 780113, 780114, 78F0114
- 78K0/KD1 ( $\mu$ PD780124 Subseries):  $\mu$ PD780121, 780122, 780123, 780124, 78F0124
- 78K0/KE1 ( $\mu$ PD780138 Subseries):  $\mu$ PD780131, 780132, 780133, 780134, 780136, 780138, 78F0134, 78F0138
- 78K0/KF1 ( $\mu$ PD780148 Subseries):  $\mu$ PD780143, 780144, 780146, 780148, 78F0148

**Target Readers** This manual is intended for engineers who will use the IE-78K0K1-ET to perform system debugging. Engineers who use this manual are expected to be thoroughly familiar with the target device's functions and use methods and to be knowledgeable about debugging.

**Purpose** This manual's purpose is to explain various debugging functions that can be performed when using the IE-78K0K1-ET.

**Organization** When using the IE-78K0K1-ET, refer to the manual supplied with the IE-78K0K1-ET (this manual).

This manual is organized as follows.

|                               |
|-------------------------------|
| IE-78K0K1-ET<br>User's Manual |
|-------------------------------|

- Basic specifications
- General
- System configuration
- Part names
- External interface functions
- Installation
- Differences between target devices and target interface circuits

**How to Use This Manual** To understand the functions in general:

→ Read this manual in the order of the contents.

To understand the basic specifications:

→ Read **CHAPTER 1 GENERAL** and **CHAPTER 2 PART NAMES**.

To learn the settings when debugging the target device of the IE-78K0K1-ET:

→ Read **CHAPTER 3 INSTALLATION**.

**Terminology**

The meanings of certain terms used in this manual are listed below.

| Term             | Meaning  |
|------------------|--|
| Emulation device | This is a general term that refers to the device in the emulator that is used to emulate the target device. It includes the emulation CPU. |
| Emulation CPU    | This is the CPU block in the emulator that is used to execute user-generated programs.   |
| Target device    | This is the device (the real chip) that is the target of emulation.  |
| Target system    | This includes the target program and the hardware provided by the user.<br>When defined narrowly, it includes only the hardware.           |
| IE system        | This refers to the IE-78K0K1-ET.   |

**Conventions**

Data significance: Higher digits on the left and lower digits on the right

**Note:** Footnote for item marked with **Note** in the text

**Caution:** Information requiring particular attention

**Remark:** Supplementary information

**Caution**

When referring the ID78K0-NS User's Manual, read IE-78K0-NS as IE-78K0K1-ET.

## CONTENTS

|   |    |
|---|----|
| CHAPTER 1 GENERAL .....   | 6  |
| 1.1 System Configuration .....  | 7  |
| 1.2 Hardware Configuration .....  | 9  |
| 1.3 Basic Specifications .....  | 10 |
| 1.4 Package Contents .....  | 12 |
| CHAPTER 2 PART NAMES .....  | 13 |
| 2.1 Names of Main Unit .....  | 13 |
| 2.2 Names of Parts on Board .....   | 14 |
| CHAPTER 3 INSTALLATION .....  | 15 |
| 3.1 Connection .....  | 16 |
| 3.2 Clock Settings .....  | 19 |
| 3.3 External Trigger Settings .....   | 31 |
| 3.4 SW2, SW3 Settings of IE-78K0K1-ET .....   | 32 |
| 3.5 Switch for Clock Monitor .....  | 32 |
| 3.6 Settings of Mask Options .....  | 33 |
| 3.7 Emulation of POC and LVI Functions .....  | 33 |
| 3.8 Low-Voltage Emulation Settings .....  | 33 |
| 3.9 LED Specifications .....  | 34 |
| CHAPTER 4 DIFFERENCES BETWEEN TARGET DEVICES AND<br>TARGET INTERFACE CIRCUITS ..... | 35 |
| CHAPTER 5 CAUTIONS ON USE .....   | 55 |
| APPENDIX A EMULATION PROBE PIN CORRESPONDENCE TABLE .....                           | 56 |
| APPENDIX B INTERFACE BOARD .....  | 65 |

## CHAPTER 1 GENERAL

The IE-78K0K1-ET is a development tool for efficient debugging of hardware or software when using one of the following target devices that belong to the 78K0 Series 8-bit of single-chip microcontrollers.


This chapter describes the IE-78K0K1-ET system configuration and basic specifications.

- Target devices
  - 78K0/KB1 ( $\mu$ PD780103 Subseries):  $\mu$ PD780101, 780102, 780103, 78F0103
  - 78K0/KC1 ( $\mu$ PD780114 Subseries):  $\mu$ PD780111, 780112, 780113, 780114, 78F0114
  - 78K0/KD1 ( $\mu$ PD780124 Subseries):  $\mu$ PD780121, 780122, 780123, 780124, 78F0124
  - 78K0/KE1 ( $\mu$ PD780138 Subseries):  $\mu$ PD780131, 780132, 780133, 780134, 780136, 780138, 78F0134, 78F0138
  - 78K0/KF1 ( $\mu$ PD780148 Subseries):  $\mu$ PD780143, 780144, 780146, 780148, 78F0148

## 1.1 System Configuration

Figure 1-1 illustrates the IE-78K0K1-ET system configuration.

**Figure 1-1. System Configuration**

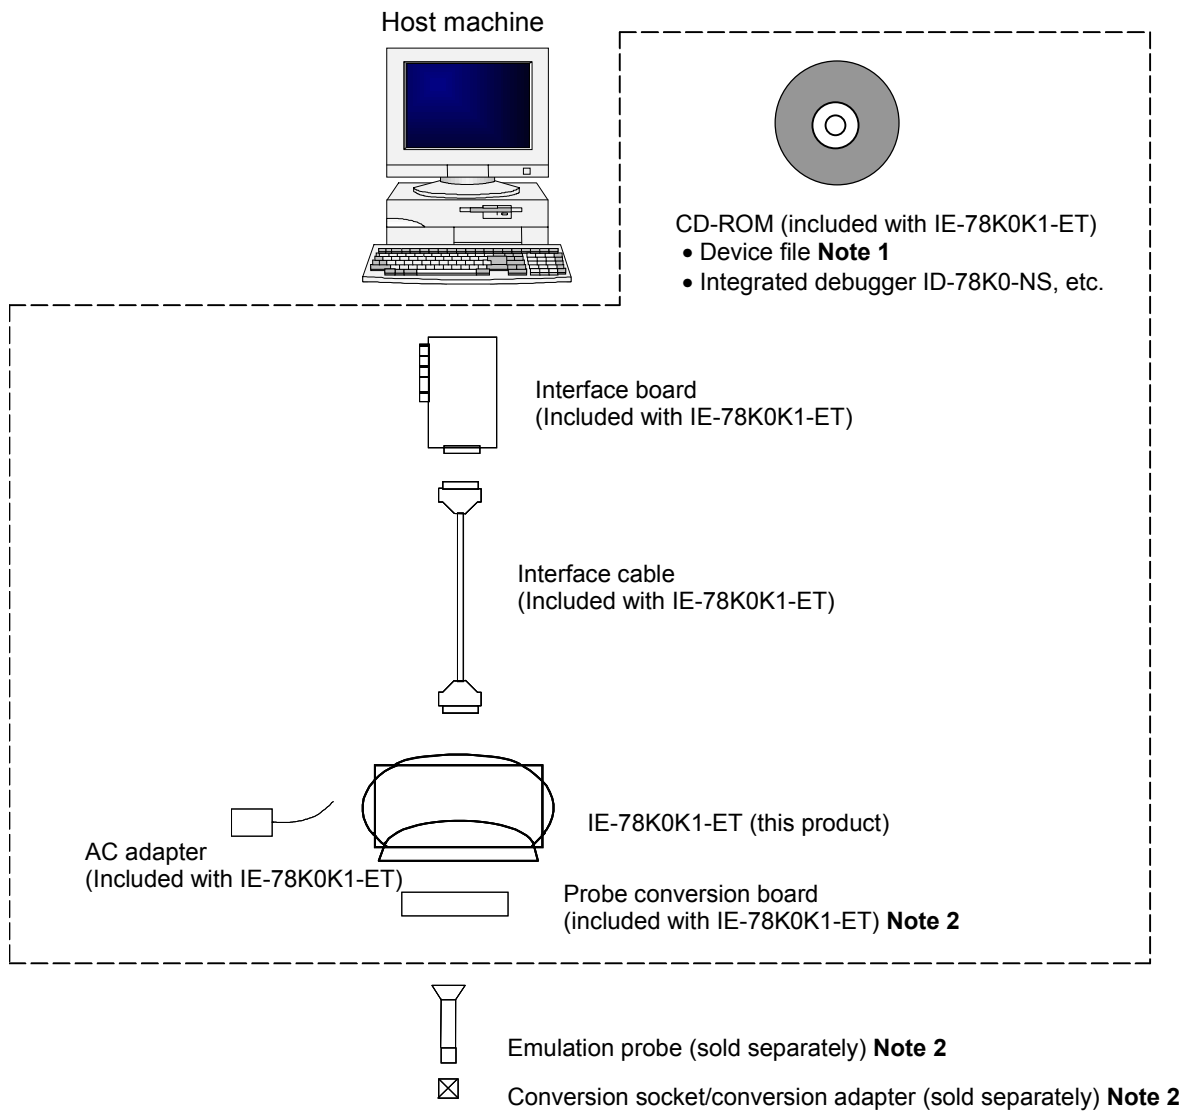

**Notes 1.** The device file is as follows.

$\mu$ SxxxxDF780103: 78K0/KB1

$\mu$ SxxxxDF780114: 78K0/KC1

$\mu$ SxxxxDF780124: 78K0/KD1

$\mu$ SxxxxDF780138: 78K0/KE1

$\mu$ SxxxxDF780148: 78K0/KF1

2. Refer to Table 1-1 for details of the probe conversion board, emulation probe and conversion socket/conversion adapter.

**Table 1-1. List of Emulation Probes, Conversion Sockets, and Conversion Adapters**

| Package                     | Probe Conversion Board | Emulation Probe | Conversion Socket/<br>Conversion Adapter    |
|-----------------------------|------------------------|-----------------|---|
| 80-pin QFP<br>(14 x 14 mm)  | Not used               | NP-80GC *1 *4   | EV-9200GC-80 *3                             |
|                             |                        | NP-80GC-TQ *1   | TGC-080SBP *2 *5                            |
|                             |                        | NP-H80GC-TQ *1  |   |
| 80-pin TQFP<br>(12 x 12 mm) |                        | NP-80GK *1      | TGK-080SDP *2 *6                            |
|                             |                        | NP-H80GK-TQ *1  |   |
| 64-pin TQFP<br>(12 x 12 mm) | 78013X PROBE<br>Board  | NP-64GK *1      | TGK-064SBP *2 *5                            |
| 64-pin LQFP<br>(14 x 14 mm) |                        | NP-H64GK-TQ *1  |   |
|                             |                        | NP-64GC *1      | EV-9200GC-64 *3                             |
|                             |                        | NP-64GC-TQ *1   | TGC-064SAP *2 *5                            |
|                             |                        | NP-H64GC-TQ *1  |   |
| 64-pin LQFP<br>(10 x 10 mm) |                        | NP-H64GB-TQ *1  | TGB-064SDP *2 *5                            |
| 52-pin LQFP<br>(10 x 10 mm) | 78012X PROBE<br>Board  | NP-H52GB-TQ *1  | TGB-052SBP *2 *5                            |
| 44-pin LQFP<br>(10 x 10 mm) | 78011X PROBE<br>Board  | NP-44GB *1 *4   | EV-9200G-44 *3                              |
|                             |                        | NP-44GB-TQ *1   | TGB-44SAP *2 *5                             |
|                             |                        | NP-H44GB-TQ *1  |   |
| 30-pin SSOP<br>(300 mil)    | 78010X PROBE<br>Board  | NP-30MC *1      | YSPACK30BK +<br>NSPACK30BK +<br>YQ-Guide *2 |

\*1 Made by Naito Densai Machida Mfg. Co., Ltd.

\*2 Made by Tokyo Eletech Corp.

\*3 Made by NEC

\*4 OEM product


\*5 Tokyo Eletech's NQPACK series socket can also be used.

\*6 Tokyo Eletech's NQPACK series socket cannot be used.

## 1.2 Hardware Configuration

The IE-78K0K1-ET's position is shown below.

**Figure 1-2. Basic Hardware Configuration**

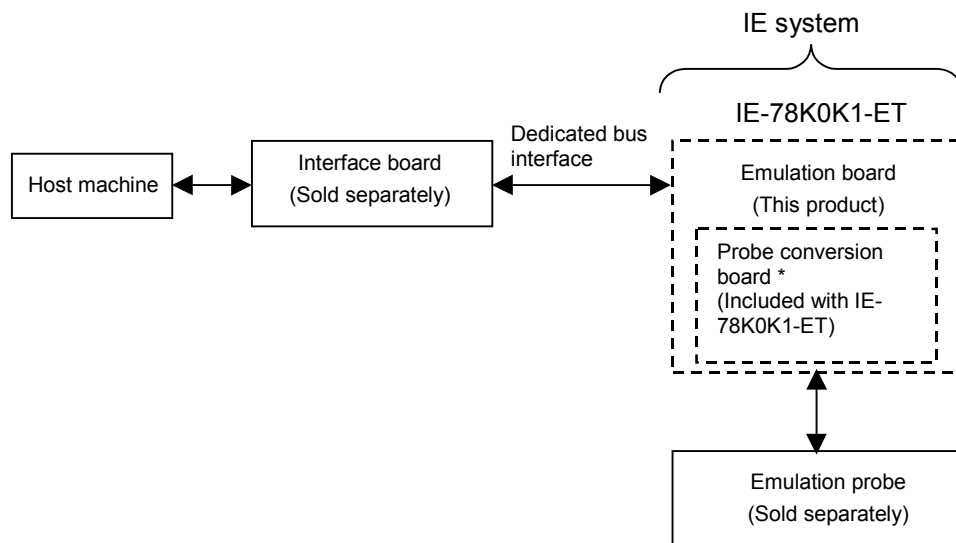

\* This is not necessary when using the 80-pin package

### 1.3 Basic Specifications

**Table 1-2. Basic Specifications (1/2)**

| Parameter                      |                           | Description   |
|--------------------------------|---------------------------|---|
| Supervisor CPU                 |                           | V40™ (operating frequency: 16.0 MHz)  |
| Target device                  |                           | <ul style="list-style-type: none"> <li>• 78K0/KB1 (μPD780103 Subseries): μPD780101, 780102, 780103, 78F0103</li> <li>• 78K0/KC1 (μPD780114 Subseries): μPD780111, 780112, 780113, 780114, 78F0114</li> <li>• 78K0/KD1 (μPD780124 Subseries): μPD780121, 780122, 780123, 780124, 78F0124</li> <li>• 78K0/KE1 (μPD780138 Subseries): μPD780131, 780132, 780133, 780134, 780136, 780138, 78F0134, 78F0138</li> <li>• 78K0/KF1 (μPD780148 Subseries): μPD780143, 780144, 780146, 780148, 78F0148</li> </ul> |
| System clock                   |                           | <ul style="list-style-type: none"> <li>• Main system clock: 10 MHz</li> <li>• Ring-OSC: 240 kHz</li> <li>• Subsystem clock: 32.768 kHz (not provided for the μPD78010x and 78F0103)</li> </ul>  |
| Clock supply                   | External                  | Pulse input   |
|                                | Internal                  | Mounted on the emulation board  |
| Emulation memory capacity      |                           | 64 KB   |
| Mapping unit                   | Internal ROM              | 4 KB  |
|                                | Internal high-speed RAM   | 64 bytes  |
|                                | Internal low-speed RAM    | 128 bytes   |
|                                | External expansion memory | 8 KB  |
| Emulation functions            |                           | <ul style="list-style-type: none"> <li>• Real-time execution</li> <li>• Break execution</li> <li>• Step execution</li> </ul>  |
| Real-time internal RAM monitor |                           | 2 KB among all data memory spaces   |
| Event detection                |                           | <ul style="list-style-type: none"> <li>• Program execution detection</li> <li>• Bus event detection</li> <li>• External trigger detection</li> <li>• Trigger output (open-drain output)</li> </ul>  |
| Event integration              |                           | <ul style="list-style-type: none"> <li>• Bus condition</li> <li>• Trace qualify condition</li> <li>• Delay condition</li> <li>• Trigger condition</li> </ul>  |
| Break trigger                  |                           | <ul style="list-style-type: none"> <li>• Event break</li> <li>• Manual break</li> <li>• Command break</li> <li>• Fail-safe break</li> </ul>   |
| Real-time trace                | Trace source              | <ul style="list-style-type: none"> <li>• All trace</li> <li>• Qualify trace</li> </ul>  |
|                                | Trace capacity            | 32 bits × 8 KB  |
|                                | Trace target              | Address, data, status   |
| Execution time measurement     |                           | 4 min. 28 sec. Max., resolution: 62.5 ns  |
| Target interface               |                           | Emulation board (sold separately) available for each device shape   |

**Table 1-2. Basic Specifications (2/2)**


| Parameter   | Description                                  |
|---|--|
| Host interface                                    | Dedicated bus interface                      |
| Low voltage support                               | 2.7 to 5.5 V (same as target device)         |
| Host machine                                      | IBM PC/AT compatible machines                |
| Power supply                                      | DC 9V  |
| Operating ambient temperature                     | 10 to 40°C                                   |
| External dimensions<br>(not including projection) | Height: 193 mm, width: 265 mm, length: 72 mm |

## 1.4 Package Contents

The packing box contains the IE-78K0K1-ET, probe conversion board, attachment bag, guarantee card, AC adapter, interface board, and packing list. The documentation bag contains the user's manual (this document), CD-ROM, and interface cable. If there are any missing or damaged items, please contact an NEC sales representative.

Fill out and return the guarantee card that comes with the main unit.

**Figure 1-3. Package Contents**

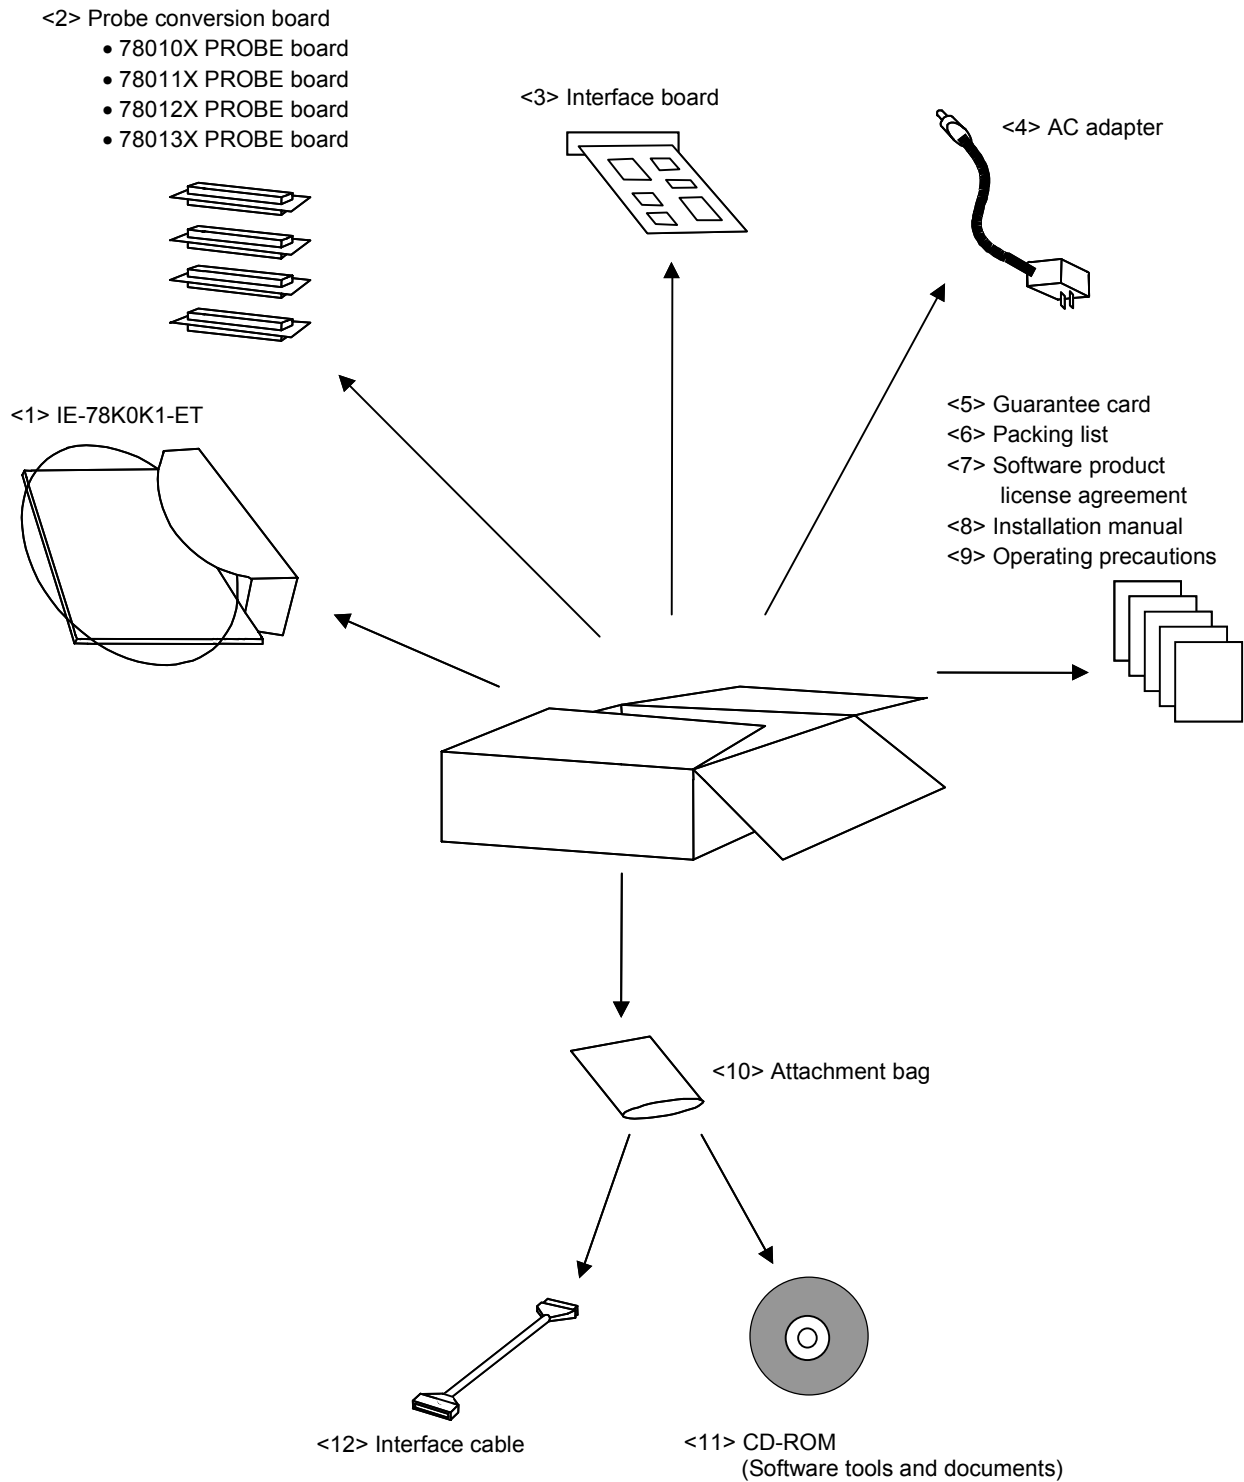


## CHAPTER 2 PART NAMES

This chapter introduces the part names of the IE-78K0K1-ET main unit.


### 2.1 Names of Main Unit

**Figure 2-1. Names of Parts on Main Unit**


(1) Probe side

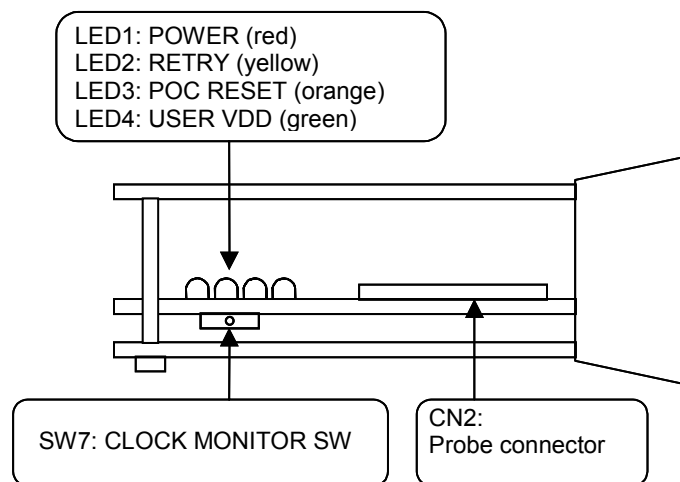

(2) Top

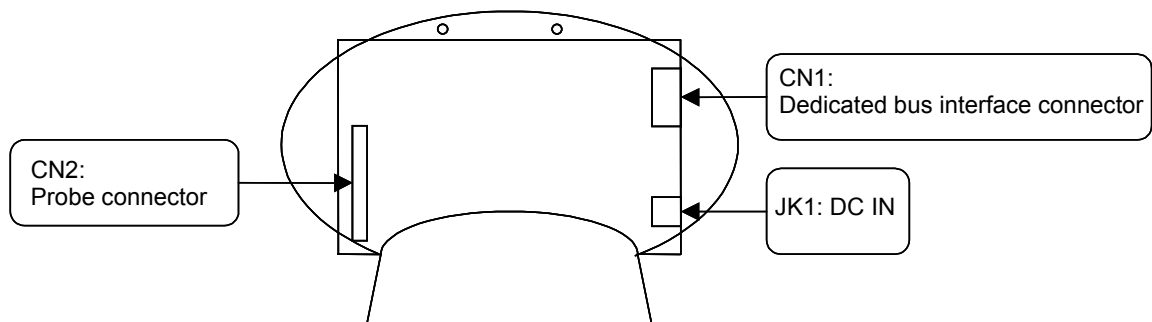


(3) Interface side

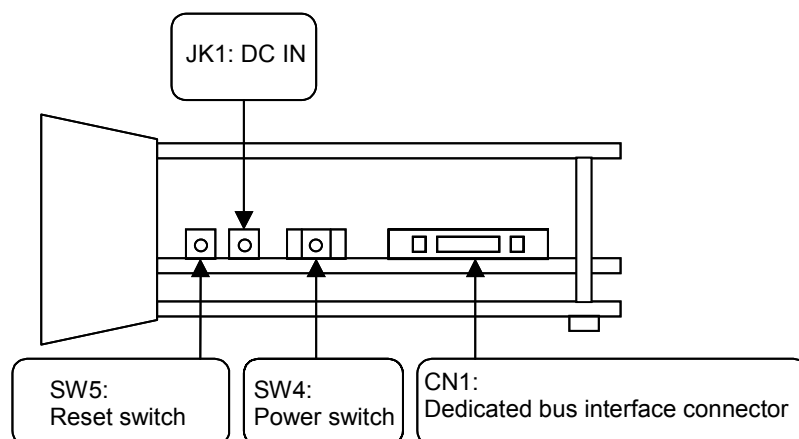

## 2.2 Names of Parts on Board

(1) Emulation board (S-780148 Board) × 1

**Figure 2-2. Package Drawing of Emulation board (S-780148 Board)**

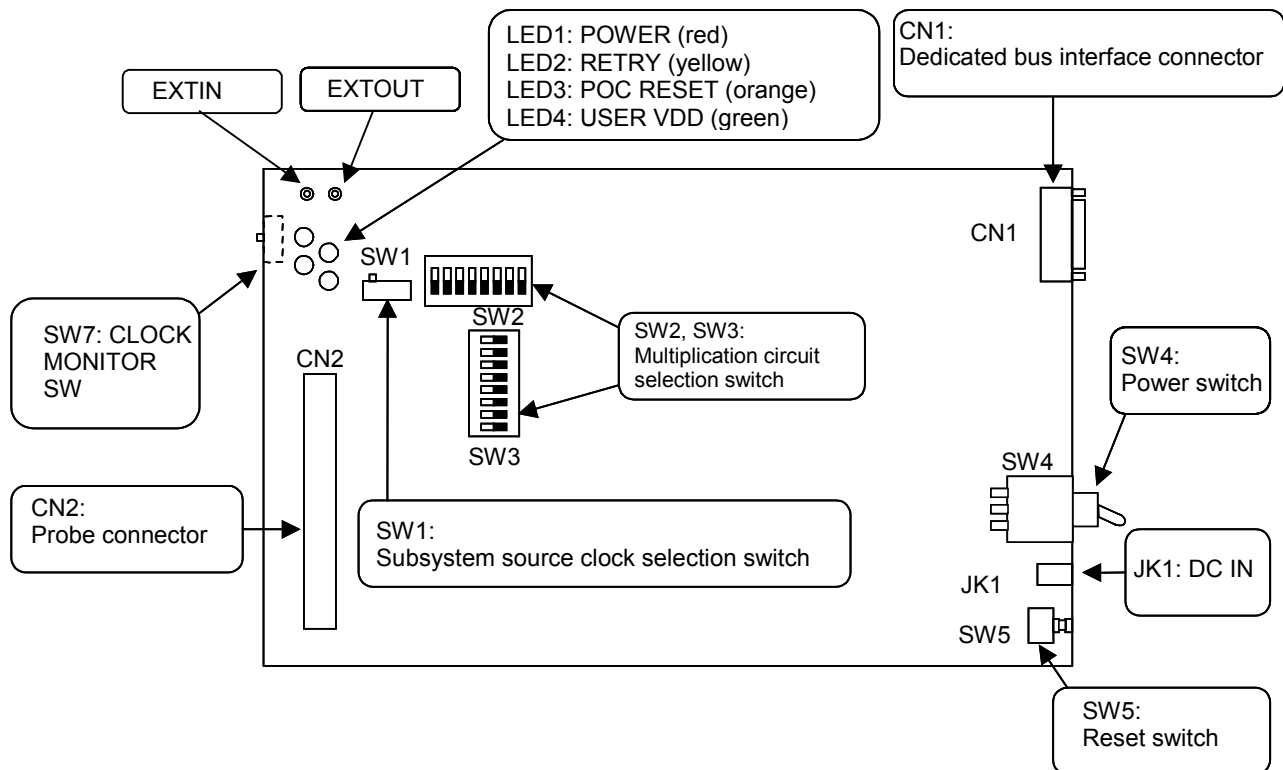

(2) Probe conversion boards (four boards)


78010X PROBE Board × 1

78011X PROBE Board × 1

78012X PROBE Board × 1

78013X PROBE Board × 1

**Figure 2-3. Package Drawings of Probe Conversion Boards (Four Boards)**

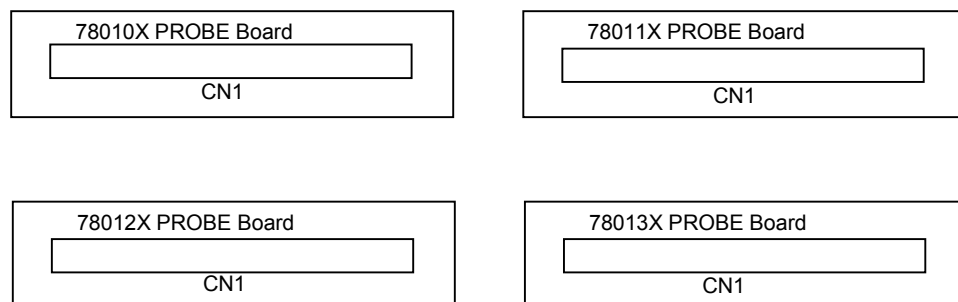

## CHAPTER 3 INSTALLATION

This chapter describes methods for connecting the IE-78K0K1-ET to the cables, etc. Mode setting methods are also described.

The following components are connected. Refer to **1.1 System Configuration** for details of the IE-78K0K1-ET system configuration.

- Emulation probe: NP-XXXXXX (Sold separately)
- Probe conversion board (Included)
- AC adapter (Included)
- Interface cable (Included)
- Interface board (Included)

**Caution** Connecting or removing parts to or from the target system, or making switch or other setting changes must be carried out after the power supply to both the IE system and the target system has been switched off.

### 3.1 Connection

#### (1) Connection with emulation probe


With the IE-78K0K1-ET, the connection method differs according to the emulation probe used.

Use the probe conversion board corresponding to the target device shown in Table 3-1. The probe conversion board is not necessary when emulating the  $\mu$ PD780148 Subseries (80-pin package).

**Caution** Incorrect connection may damage the IE system. For more details on connection, see the user's manual for each emulation probe.


- When using the probe conversion board
  - <1> Connect CN2 of the probe conversion board to CN2 of the IE-78K0K1-ET.
  - <2> Connect CN1 of the probe conversion board to the emulation probe.

**Figure 3-1. When Using Probe Conversion Board**

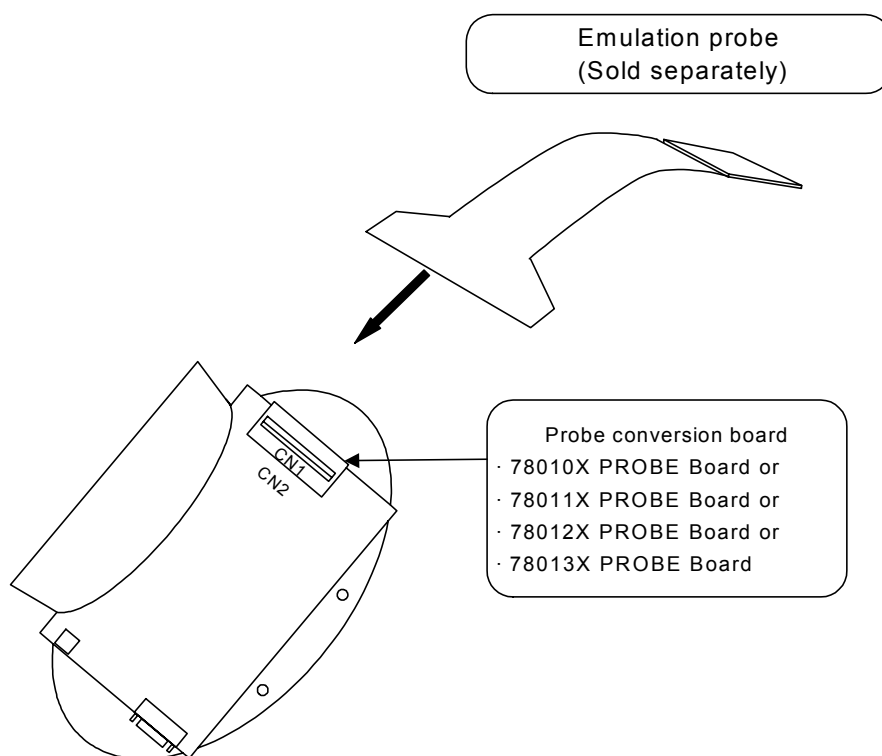

- When not using the probe conversion board  
Connect the emulation probe to CN2 of the IE-78K0K1-ET.

**Figure 3-2. When Not Using Probe Conversion Board**

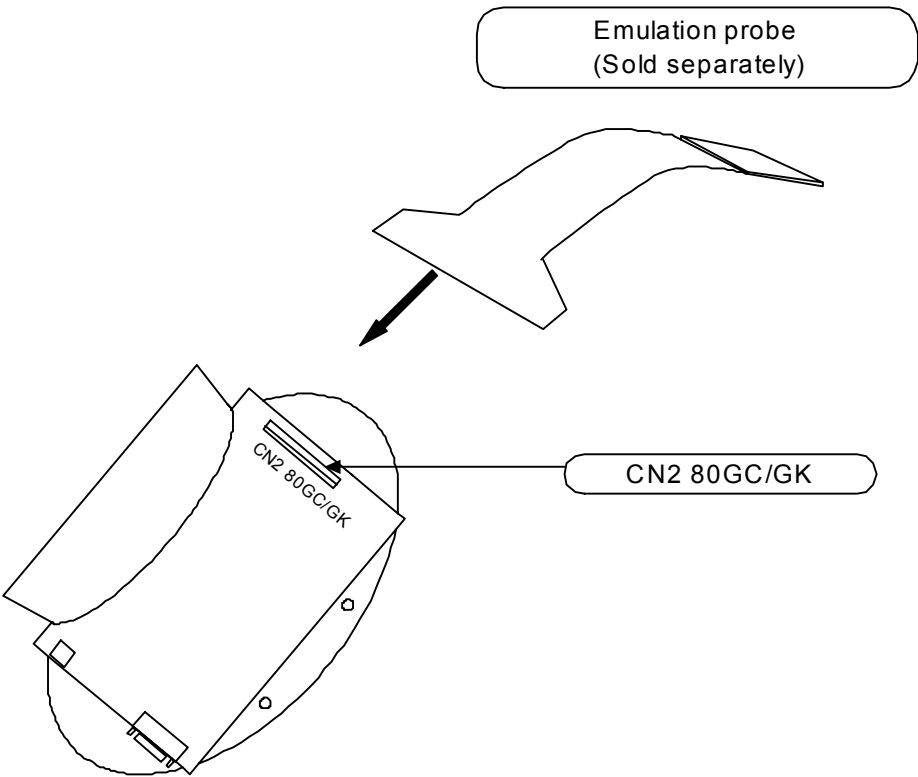


**Table 3-1. Target Device and Corresponding Probe Conversion Board**

| Target Device  | Probe Conversion Board to Be Used  |
|--|------------------------------------|
| $\mu$ PD780101, 780102, 780103, 78F0103                                  | 78010X PROBE Board                 |
| $\mu$ PD780111, 780112, 780113, 780114, 78F0114                          | 78011X PROBE Board                 |
| $\mu$ PD780121, 780122, 780123, 780124, 78F0124                          | 78012X PROBE Board                 |
| $\mu$ PD780131, 780132, 780133, 780134, 780136, 780138, 78F0134, 78F0138 | 78013X PROBE Board                 |
| $\mu$ PD780143, 780144, 780146, 780148, 78F0148                          | Probe conversion board is not used |

**(2) Connection with AC adapter**


Use the AC adapter supplied with the IE-78K0K1-ET.

<1> Insert the AC adapter in “JK1” on the interface panel of the IE-78K0K1-ET.

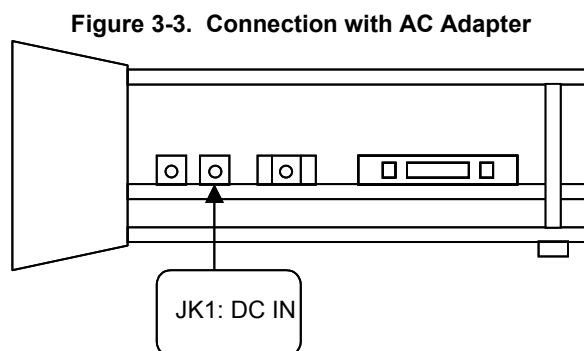**(3) Connection with interface cable**

Use the interface cable supplied with the IE-78K0K1-ET.

<1> Insert the interface cable in the dedicated bus interface connector on the interface panel of the IE-78K0K1-ET.

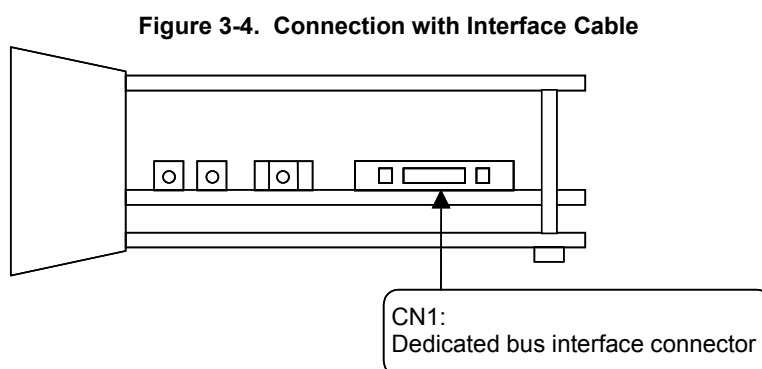

## 3.2 Clock Settings

### 3.2.1 Outline of clock settings

The main system clock and subsystem clock to be used can be selected from (1) to (4) below.


- (1) Clock already mounted on emulation board
- (2) Clock mounted by user
- (3) Clock input from the target system
- (4) Clock generated using Ring-OSC<sup>Note</sup>

**Note** (4) can be selected only for the main system clock.

When the target system includes a clock oscillator, refer to **3.2.2 (1) Clock already mounted on emulation board** or **3.2.2 (2) Clock mounted by user**.

**Caution** An abnormal main system clock supply will cause the IE system to hang up.


**Figure 3-5. Target System Clock Oscillator**

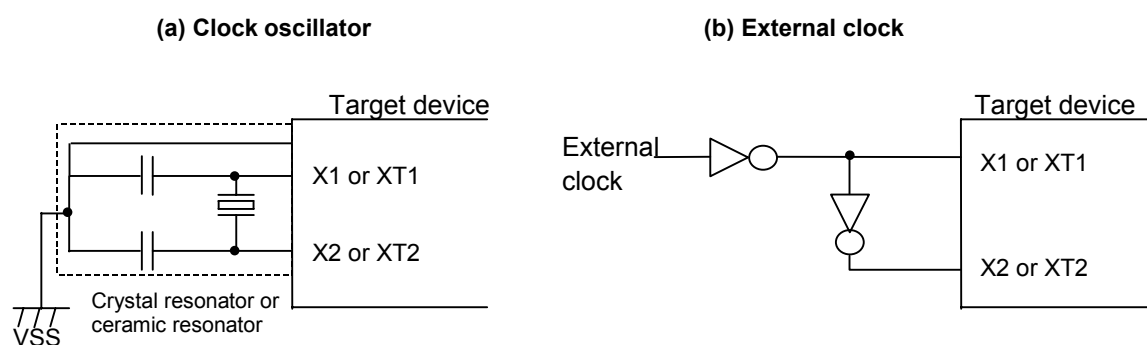


- When the target system includes a clock oscillator:  
Select clock (1), (2), or (4) for **Figure 3-5 (a)**. (3) cannot be selected.
- When the target system includes an external clock:  
Clock (1), (2), (3), or (4) can be selected for **Figure 3-5 (b)**.

Figure 3-6. Outline of System Clock

• Main system clock

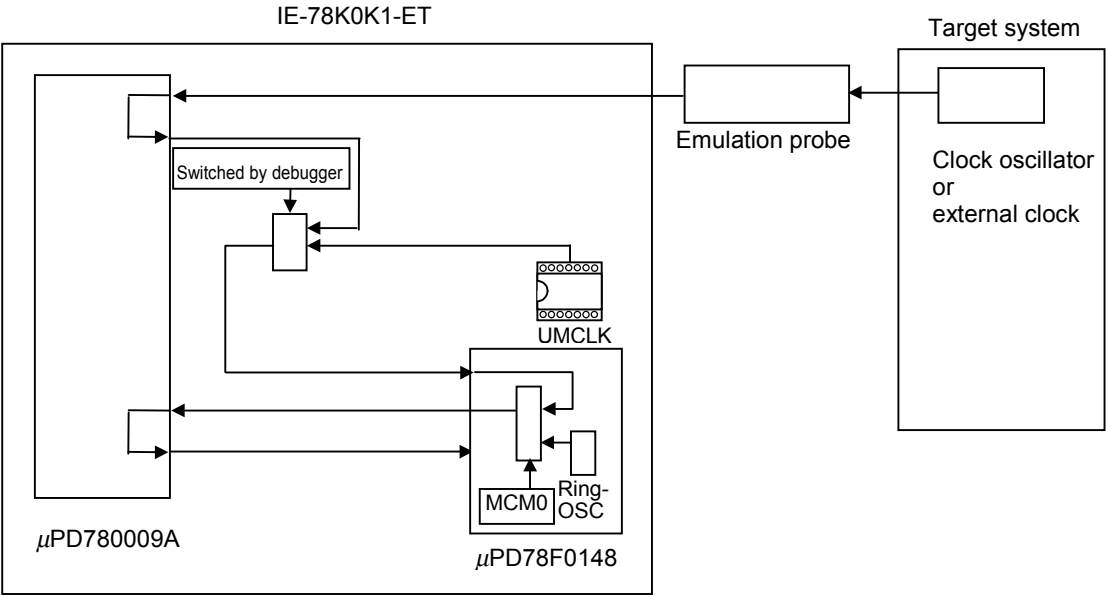

• Subsystem clock

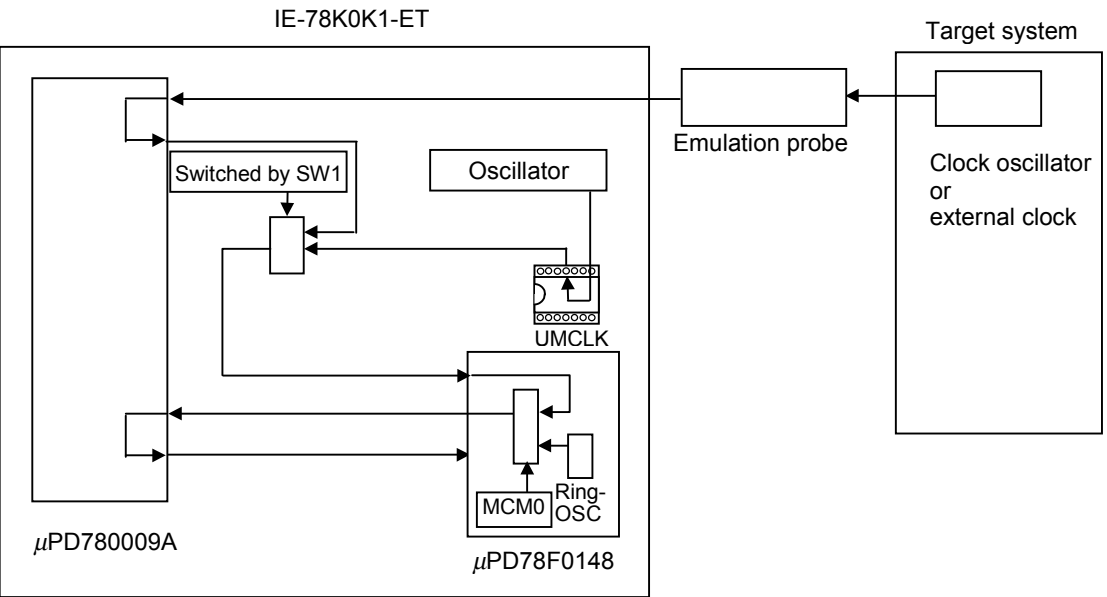

### 3.2.2 Main system/subsystem clock settings

The settings of the main system clock are shown in Table 3-2.

**Table 3-2. Settings of Main System Clock**

| Frequency of Main System Clock Used             |                        | SFR<br>(MCM0) | IE-78K0K1-ET                                | Integrated Debugger<br>(ID78K0-NS)              |
|---|------------------------|---------------|---|---|
|   |                        |               | Parts Board (UMCLK)                         | CPU Clock Source<br>Selection <sup>Note 2</sup> |
| (1) Clock already mounted<br>on emulation board | 10.0 MHz               | 1             | Oscillator                                  | Internal  |
| (2) Clock mounted by user                       | Other than<br>10.0 MHz |               | Oscillator assembled or<br>prepared by user |   |
| (3) Clock input from the<br>target system       |                        |               | Oscillator (not used)                       | External  |
| (4) Ring-OSC <sup>Note 1</sup>                  | 240 kHz                | 0             | Oscillator (not used)                       | Internal or external                            |

**Notes** 1. The IE-78K0K1-ET operates with the Ring-OSC clock when the debugger is activated and immediately after reset.

2. Select the source clock for the main system clock when the debugger is started. After that, do not change the setting.

The settings of the subsystem clock are shown in Table 3-3.

**Table 3-3. Settings of Subsystem Clock**

| Frequency of Subsystem Clock Used                       |                          | IE-78K0K1-ET<br>Parts Board (USCLK)         | IE-78K0K1-ET<br>SW1 |
|---|--------------------------|---|---------------------|
| (1) Clock that is already mounted on<br>emulation board | 32.768 kHz               | 6-8 shorted                                 | I side (Internal)   |
| (2) Clock that is mounted by user                       | Other than<br>32.768 kHz | Oscillator assembled or<br>prepared by user |                     |
| (3) Clock input from the target system                  |                          | Oscillator (not used)                       | E side (External)   |

A 32.768 kHz clock is supplied from the oscillator on the IE-78K0K1-ET according to the factory settings.

The main system/subsystem clock settings of (1) to (4) are individually described in the following pages.

**(1) When using clock already mounted on emulation board**

When the IE-78K0K1-ET is shipped, a 10.0 MHz crystal oscillator and a parts board with 6-8 shorted are already mounted on the UMCLK socket and USCLK socket, respectively, and a clock is supplied from the 32.768 kHz oscillator on the board.

When using the factory-set mode settings, there is no need to make any other hardware settings.


A setting outline is shown in Figure 3-7.

Set the main system clock in the following steps.

- <1> When starting the integrated debugger (ID78K0-NS), open the configuration dialog box and select "Internal" in the area (Clock) for selecting the CPU clock source.
- <2> After the debugger is activated, set the special-function register MCM0 to 1 to switch the CPU operating clock from Ring-OSC (default) to the clock already mounted on the emulation board.


Set SW1 to the I side for the subsystem clock to set the clock already mounted on the emulation board.

**Figure 3-7. When Using Clock Already Mounted on Emulation Board**

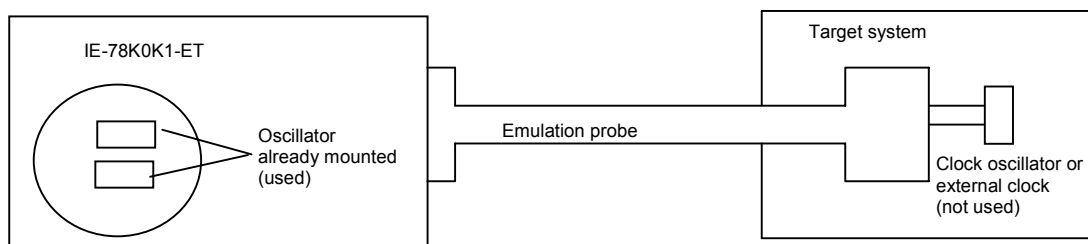


**Remark** The clock that is supplied by the IE-78K0K1-ET's oscillator (encircled in the figure) is used.

Figure 3-8. Flow of Clock (Main System Clock)

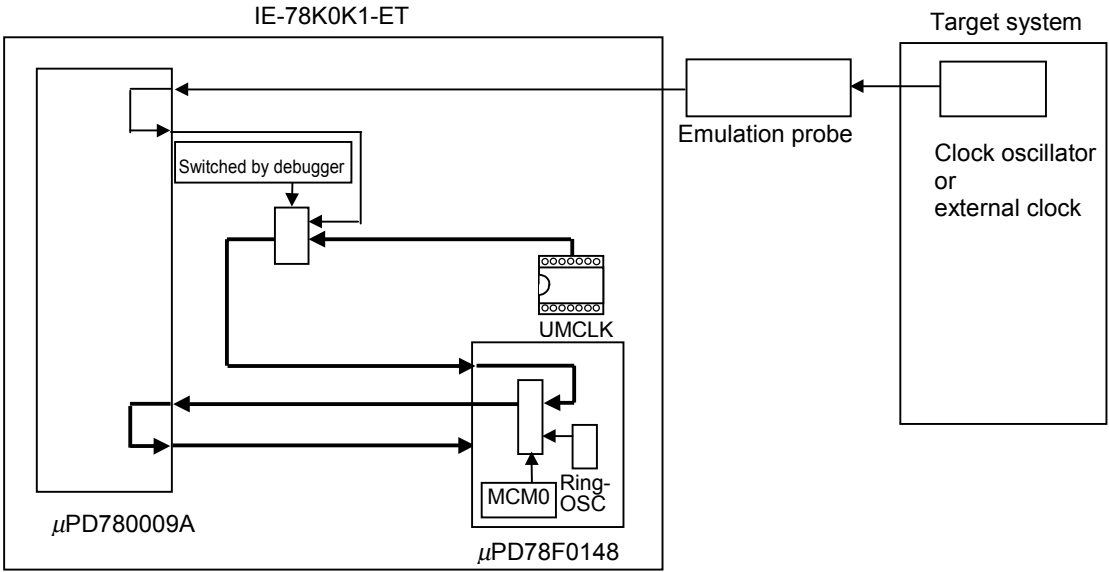

**Remark** The flow of the clock is indicated by the bold line.

Figure 3-9. Flow of Clock (Subsystem Clock)

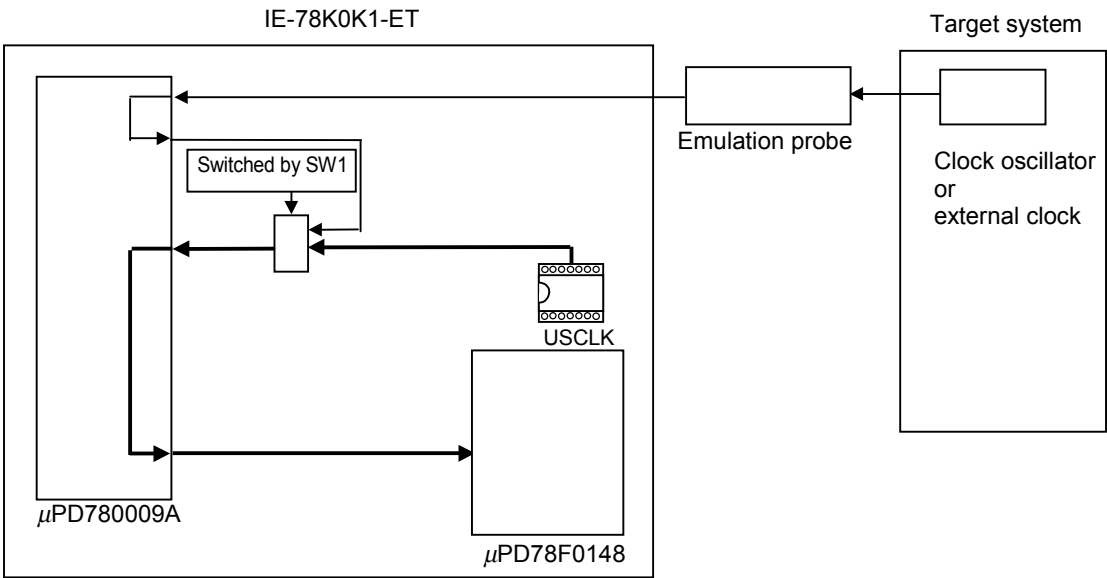

**Remark** The flow of the clock is indicated by the bold line.

**(2) When using clock mounted by user**

Remove the crystal oscillator already mounted on the emulation board (UMCLK: 10.0 MHz) or parts board (USCLK: 6-8 shorted) and mount the parts board (oscillator) that includes the oscillator or resonator to be used. This is effective when debugging with a clock with a different frequency from the clock already mounted (main system clock: 2.0 MHz to 10.0 MHz, subsystem clock: 32 kHz to 38.5 kHz).


A setting outline is shown in Figure 3-10. The settings of either (a) or (b) described in the following pages are required, depending on the type of clock to be used.

Set the main system clock in the following steps.

- <1> When starting the integrated debugger (ID78K0-NS), open the configuration dialog box and select "Internal" in the area (Clock) for selecting the CPU clock source.
- <2> After the debugger is activated, set the special-function register MCM0 to 1 to switch the CPU operating clock from Ring-OSC (default) to the clock mounted by user.


Set SW1 to the I side for the subsystem clock to set the clock mounted by user.

**Figure 3-10. When Using Clock Mounted by User**

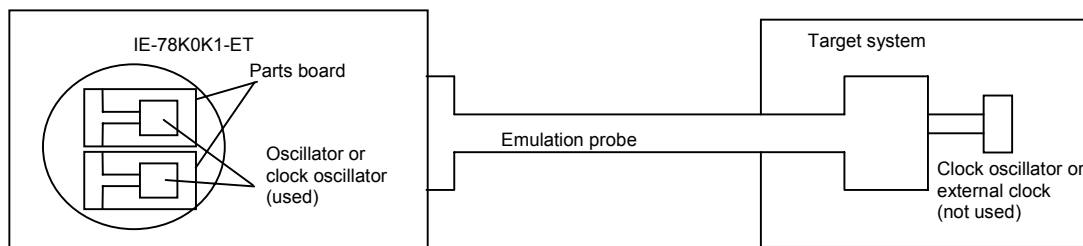


**Remark** The clock that is supplied by the IE-78K0K1-ET's oscillator (encircled in the figure) is used.

Figure 3-11. Flow of Clock (Main System Clock)

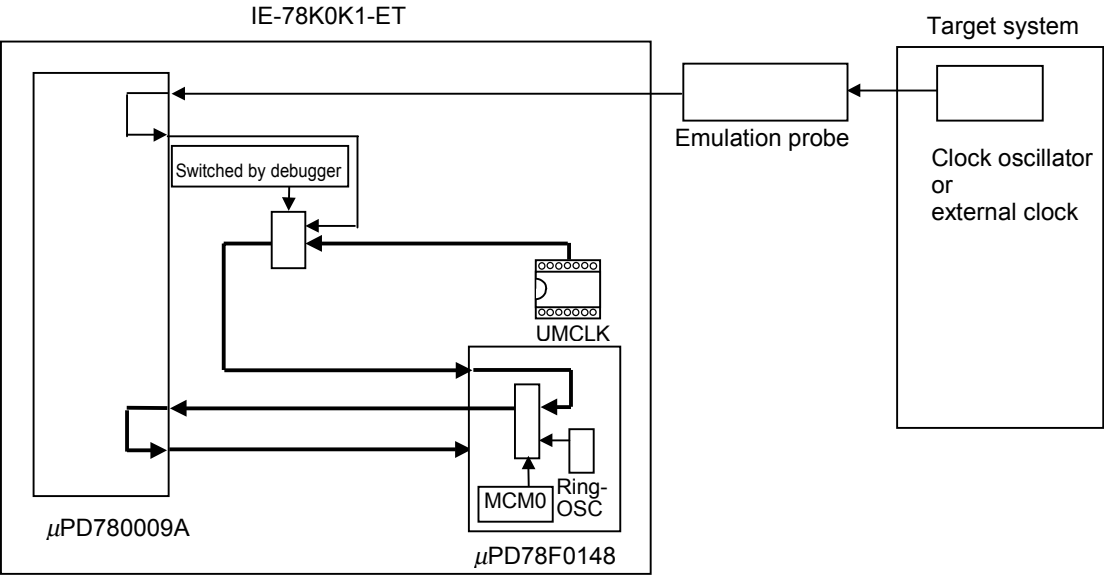

**Remark** The flow of the clock is indicated by the bold line.

Figure 3-12. Flow of Clock (Subsystem Clock)

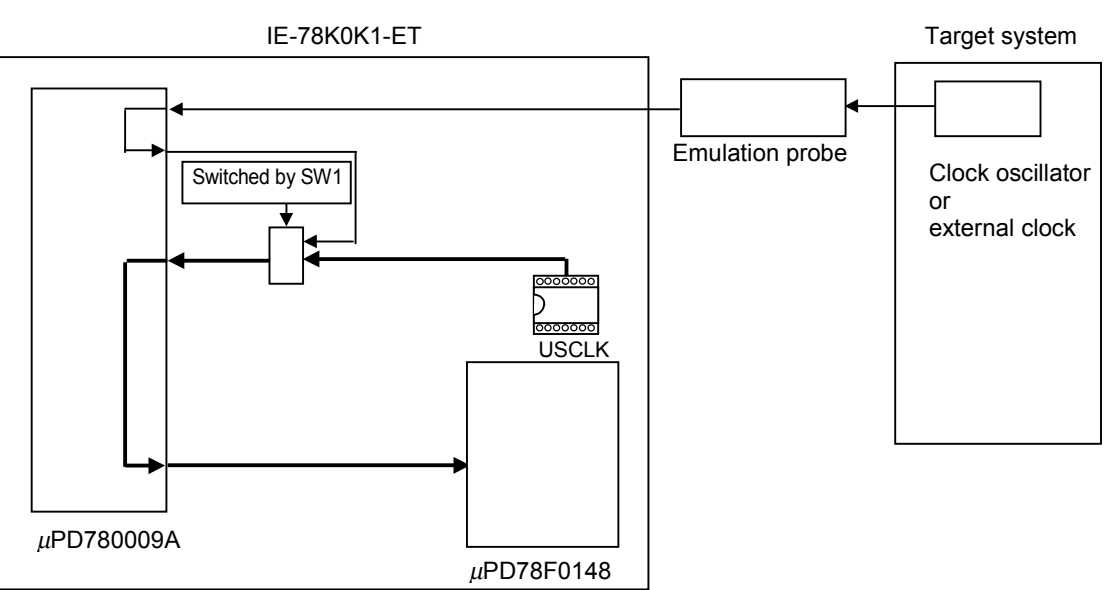


**Remark** The flow of the clock is indicated by the bold line.

(a) When using a crystal oscillator

- ◆ Necessary items
  - Crystal oscillator (with pin configuration as shown in Figure 3-13)

Figure 3-13. Crystal Oscillator (Main System Clock)

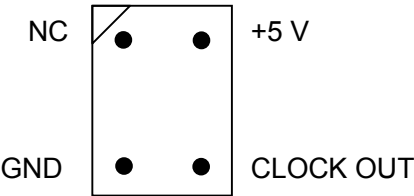

<Procedure>

- <1> Prepare the IE-78K0K1-ET.
- <2> Remove the crystal oscillator or parts board from the socket (marked UMCLK or USCLK) on the IE-78K0K1-ET.
- <3> Mount the new crystal oscillator in the socket from which the oscillator was removed in <2> above (UMCLK or USCLK). At this time, insert the oscillator into the socket aligning the pins as indicated below.

Figure 3-14. Crystal Oscillator and Socket Pins

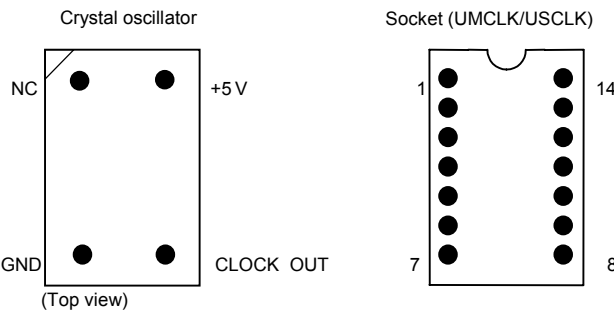


Table 3-4. Crystal Oscillator Pins and Socket Pin Numbers

| Crystal Oscillator Pin | Socket Pin No. |
|------------------------|----------------|
| NC                     | 1              |
| GND                    | 7              |
| CLOCK OUT              | 8              |
| +5 V                   | 14             |

(b) When using a ceramic or crystal resonator

- ◆ Necessary items
- Parts board

• Ceramic or crystal resonator

• Resistor Rx

• Capacitor CA


• Capacitor CB

• Solder kit

<Procedure>

<1> Solder the target ceramic or crystal resonator, resistor Rx, capacitor CA, and capacitor CB (all with suitable oscillation frequencies) onto the supplied parts board (as shown below).

Figure 3-15. Connections on Parts Board

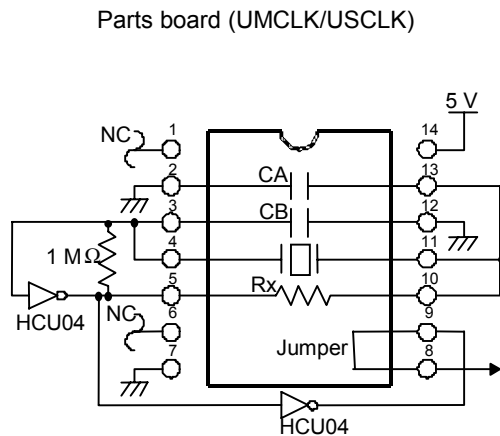

Remark NC: No Connection

Table 3-5. Connection Pins and Parts Board

| Pin No. | Connection   |
|---------|--------------|
| 2-13    | Capacitor CA |
| 3-12    | Capacitor CB |
| 4-11    | Resonators   |
| 5-10    | Resistor Rx  |
| 8-9     | Shorted      |

- <2> Prepare the IE-78K0K1-ET.
- <3> Remove the crystal oscillator that is mounted in the IE-78K0K1-ET's UMCLK socket.
- <4> Connect the parts board (<1> above) to the socket (UMCLK or USCLK) from which the crystal oscillator was removed. Check the pin 1 mark to make sure the board is mounted in the correct direction.
- <5> Make sure that the parts board mounted in the UMCLK or USCLK socket is wired as shown in Figure 3-15 above.

### (3) Input a clock from the target system

The external clock pulse signal on the target system is used via an emulation probe. Therefore this clock can be used only when an external clock is connected on the target system

A setting outline is shown in Figure 3-16.


Set the main system clock in the following steps.

- <1> When starting the integrated debugger (ID78K0-NS), open the configuration dialog box and select "External" in the area (Clock) for selecting the CPU clock source.
- <2> After the debugger is activated, set the special-function register MCM0 to 1 to switch the CPU operating clock from Ring-OSC (default) to the clock input from the target system.

Set SW1 to the E side for the subsystem clock to set the clock from the target system.


**Caution** The clock input from the target should be a rectangular wave.

**Figure 3-16. When Using Clock Input from Target System (Main System Clock)**

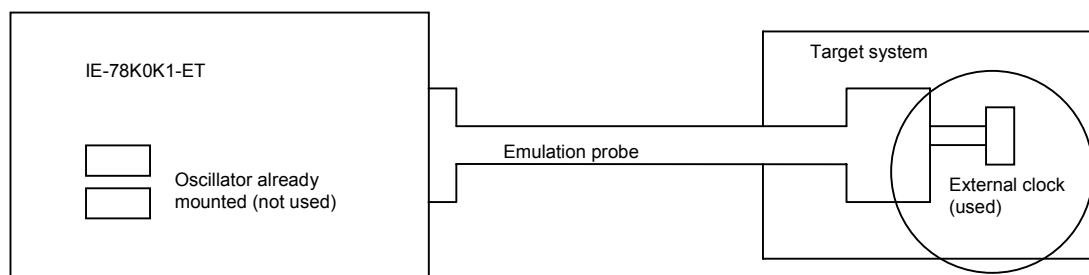


**Remark** The external clock that is supplied by the target system (encircled in the figure) is used.

Figure 3-17. Flow of Clock (Main System Clock)

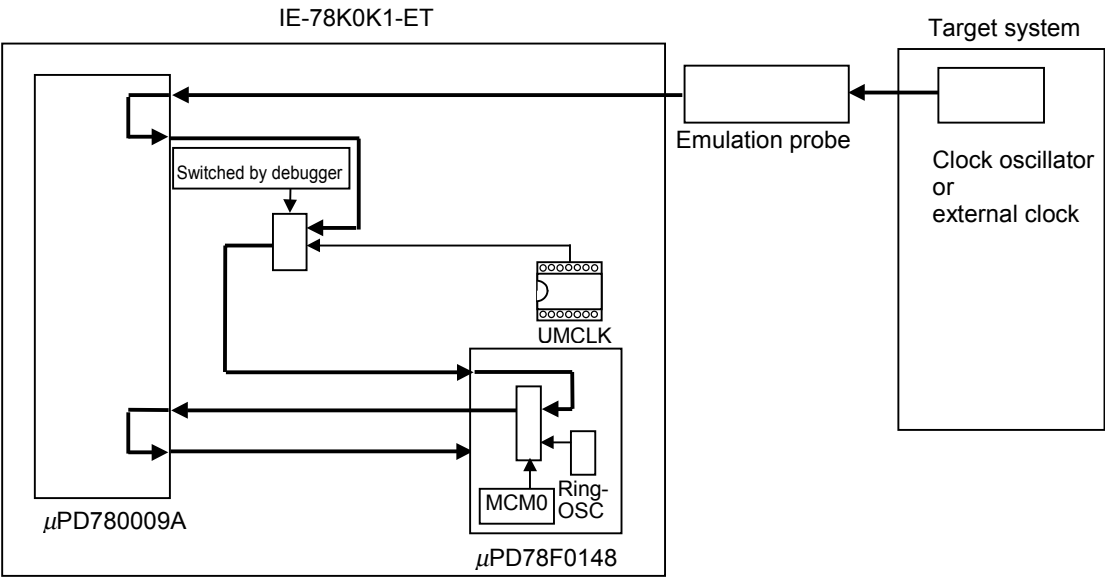

**Remark** The flow of the clock is indicated by the bold line.

Figure 3-18. Flow of Clock (Subsystem Clock)

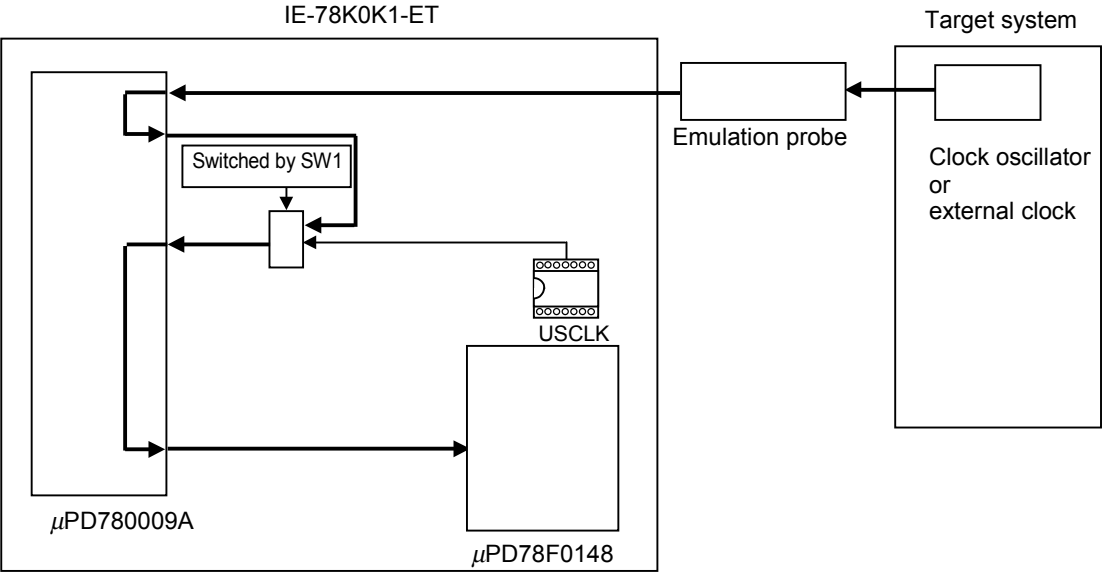

**Remark** The flow of the clock is indicated by the bold line.

#### (4) When using Ring-OSC

This clock can be selected only for the main system clock.

When the IE system is activated, Ring-OSC (240 kHz) is selected as the CPU operating clock.

A setting outline is shown in Figure 3-19.

**Caution** Use of the peripheral functions, except for the following cases, is prohibited when Ring-OSC is selected as the CPU operating clock (MCM0 = 0).

- When watchdog timer is used
- When clock monitor is used
- When  $f_{osc}/2^7$  is selected for the TMH1 count clock (CKS12 = 1, CKS11 = 0, CKS10 = 1)
- When peripheral function that uses an external clock as the operating clock is used

Figure 3-19. When Using Ring-OSC (Main System Clock)


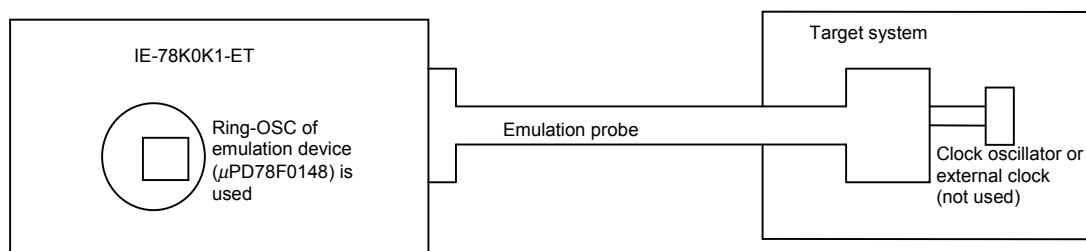


Figure 3-20. Flow of Clock (Main System Clock)

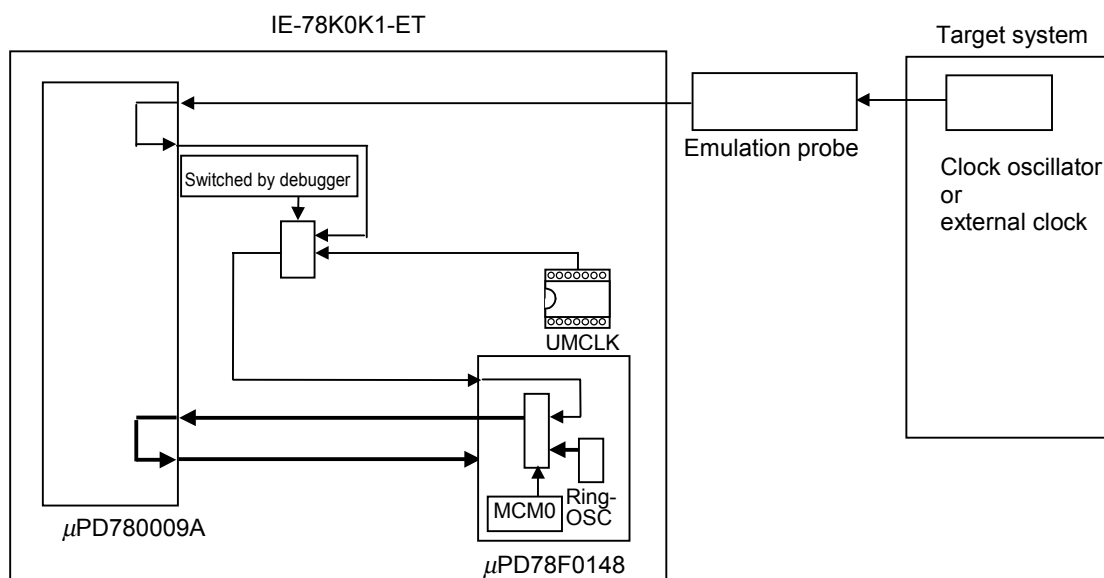

**Remark** The flow of the clock is indicated by the bold line.

### 3.3 External Trigger Settings

#### (1) EXTOUT

A low-level pulse is output from the EXTOUT pin on the emulation board for 1.3  $\mu$ s upon the occurrence of a break event.

**Caution** Because this is an open-drain output, a pull-up resistor should be connected on the target system.

#### (2) EXTIN

An event signal can be input from the EXTIN pin on the emulation board. Input a high-level pulse signal for 2 CPU operating clocks or longer.


**Caution** Satisfy the following electrical specifications.

**Table 3-6. Electrical Specifications**

| Parameter           | MIN. [V]                    | MAX. [V]                    |
|---------------------|-----------------------------|-----------------------------|
| Input voltage, high | Target voltage $\times$ 0.7 | Target voltage              |
| Input voltage, low  | 0                           | Target voltage $\times$ 0.3 |

See the ID78K Series Integrated Debugger Ver.2.30 or Later Operation User's Manual (U15181E) for descriptions of usage.

**Figure 3-21. Package Drawing of Emulation board (S-780148 Board)**

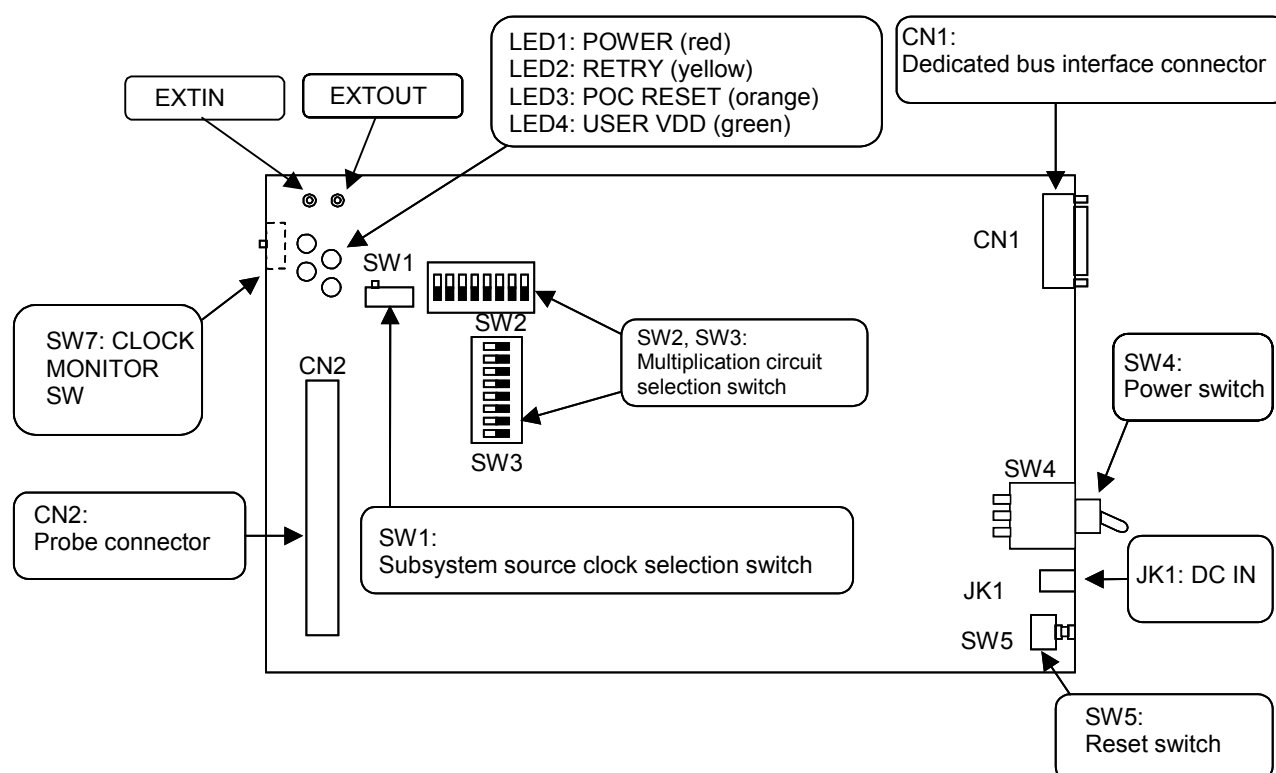

### 3.4 SW2, SW3 Settings of IE-78K0K1-ET

Change the settings of the multiplication circuit as shown in Table 3-7 according to the operating frequency of the main system clock.

**Table 3-7. Settings of Multiplication Circuit**


| Main System Clock Frequency  | SW2               | SW3               |
|------------------------------|-------------------|-------------------|
| 2.0 MHz to less than 2.5 MHz | 1 ON (Other: OFF) | 1 ON (Other: OFF) |
| 2.5 MHz to less than 3.5 MHz | 2 ON (Other: OFF) | 2 ON (Other: OFF) |
| 3.5 MHz to less than 5.0 MHz | 3 ON (Other: OFF) | 3 ON (Other: OFF) |
| 5.0 MHz to less than 6.5 MHz | 4 ON (Other: OFF) | 4 ON (Other: OFF) |
| 6.5 MHz to less than 9 MHz   | 5 ON (Other: OFF) | 5 ON (Other: OFF) |
| 9 MHz to 10 MHz              | 6 ON (Other: OFF) | 6 ON (Other: OFF) |

### 3.5 Switch for Clock Monitor

A switch for clock monitor emulation (SW7) is mounted on the IE-78K0K1-ET board.

Emulation for when the clock is stopped can be performed by pressing SW7.

**Figure 3-22. Switch for Clock Monitor**

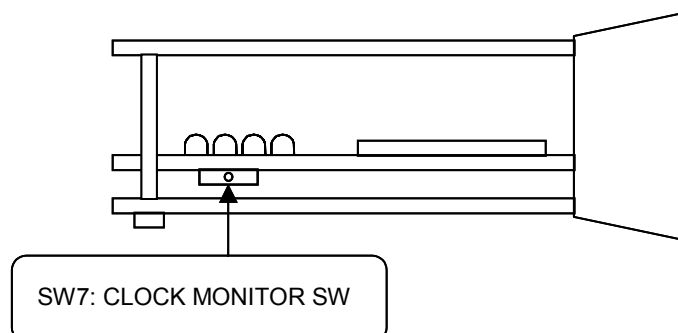

### 3.6 Settings of Mask Options

The following mask options are provided in the IE-78K0K1-ET.

- Ring-OSC
- POC ON/OFF and detection voltage 2.85 V, 3.5 V
- P60 to P63 (these ports are not provided in the  $\mu$ PD780101, 780102, 780103 and 78F0103)

Set the mask options in the integrated debugger.

Open the mask option window from [Option] → [Mask Option] and set the mask options.

Refer to the ID78K Series Integrated Debugger Ver.2.30 or Later Operation User's Manual (U15185E) for details of the settings.

- |              |         |                                   |
|--------------|---------|-----------------------------------|
| • RINGMSK    | NONMSK: | Ring-OSC masking disabled         |
|              |         | Watchdog timer stop enabled       |
|              | MSK:    | Ring-OSC masking enabled          |
|              |         | Watchdog timer stop disabled      |
| • POC        | ON:     | POC function ON                   |
|              | OFF:    | POC function OFF                  |
| • POCV       | 2.85 V: | POC detection voltage 2.85 V      |
|              | 3.5 V:  | POC detection voltage 3.5 V       |
| • P60 to P63 | ON:     | Pulled up by mask option resistor |
|              | OFF:    | No mask option resistor           |

### 3.7 Emulation of POC and LVI Functions

Emulation of the POC (power-on clear) and LVI (low-voltage detection) functions is implemented by detecting a voltage input from the VDD pin of the target device.

Apply VDD (target voltage) from the target system via the emulation probe (apply in the same manner when operated at 5 V).

### 3.8 Low-Voltage Emulation Settings

Low-voltage emulation is implemented by detecting the voltage input from the VDD pin of the target device.


Apply VDD (target voltage) from the target system via the emulation probe (apply in the same manner when operated at 5 V).

### 3.9 LED Specifications

The LED lighting specifications are as follows.

- LED1: POWER (red): Power is being applied to the IE-78K0K1-ET
- LED2: RETRY (yellow): A retry is being performed
- LED3: POC RESET (orange): POC is being reset
- LED4: USER VDD (green): Power for the target system is being detected

**Figure 3-23. LED Specifications**

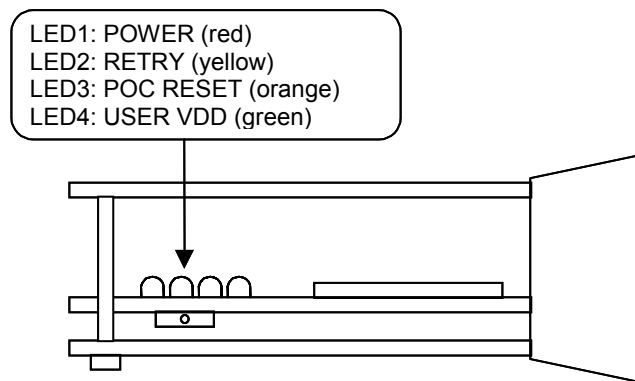

## CHAPTER 4 DIFFERENCES BETWEEN TARGET DEVICES AND TARGET INTERFACE CIRCUITS

This chapter describes the differences between the signal lines of the target device and those of the IE-78K0K1-ET's target interface circuit.

The target device consists of CMOS circuits, whereas the IE-78K0K1-ET's target interface circuit consists of emulation circuits such as the emulation CPU, TTL, and CMOS-IC.

At the time of debugging by connecting the IE system and the target system, the IE system performs emulation as if the actual target device is operating on the target system, however, in reality, it is the IE system that performs the emulation, thus producing slight differences.

- (a) Signals that are input/output from emulation CPU  $\mu$ PD78F0148
- (b) Signals that are input/output from emulation CPU  $\mu$ PD780009A
- (c) Other signals

Regarding the signals in (a) to (c) above, the circuits of the IE system are shown below.

### (1) When $\mu$ PD780101, 780102, 780103, and 78F0103 are emulated

- (a) Signals that are input/output from emulation CPU  $\mu$ PD78F0148

- P03 to P00
- P17 to P10
- P23 to P20
- P33 to P30
- P120
- P130
- AVREF

- (b) Signals that are input/output from emulation CPU  $\mu$ PD780009A

None

- (c) Other signals

- X1, X2, RESET, VDD, IC/VPP, VSS, AVSS

Figure 4-1. Equivalent Circuit of Emulation Circuit (a)

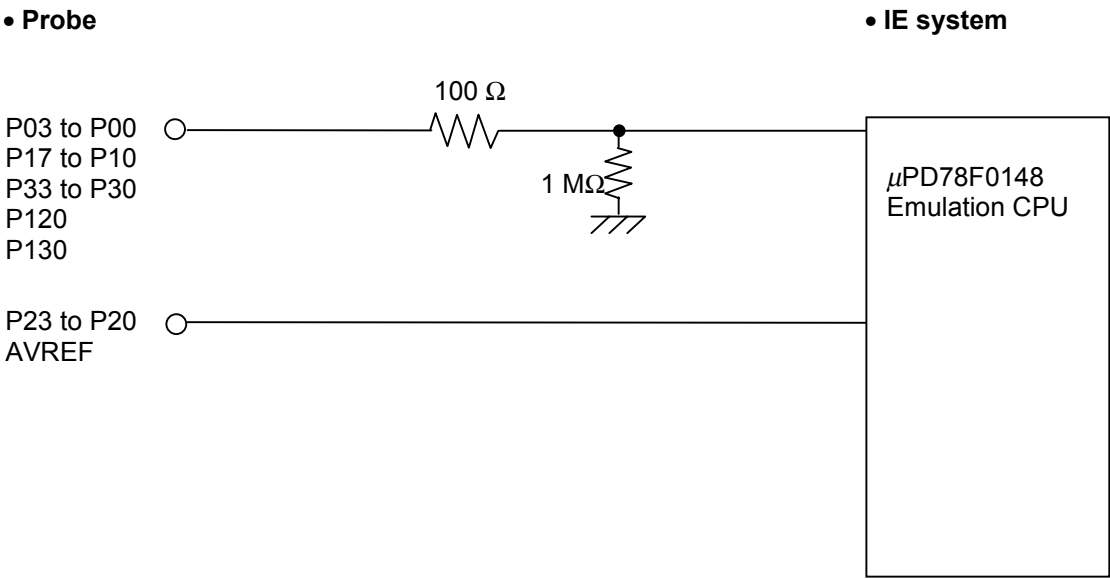


Figure 4-2. Equivalent Circuit of Emulation Circuit (c)


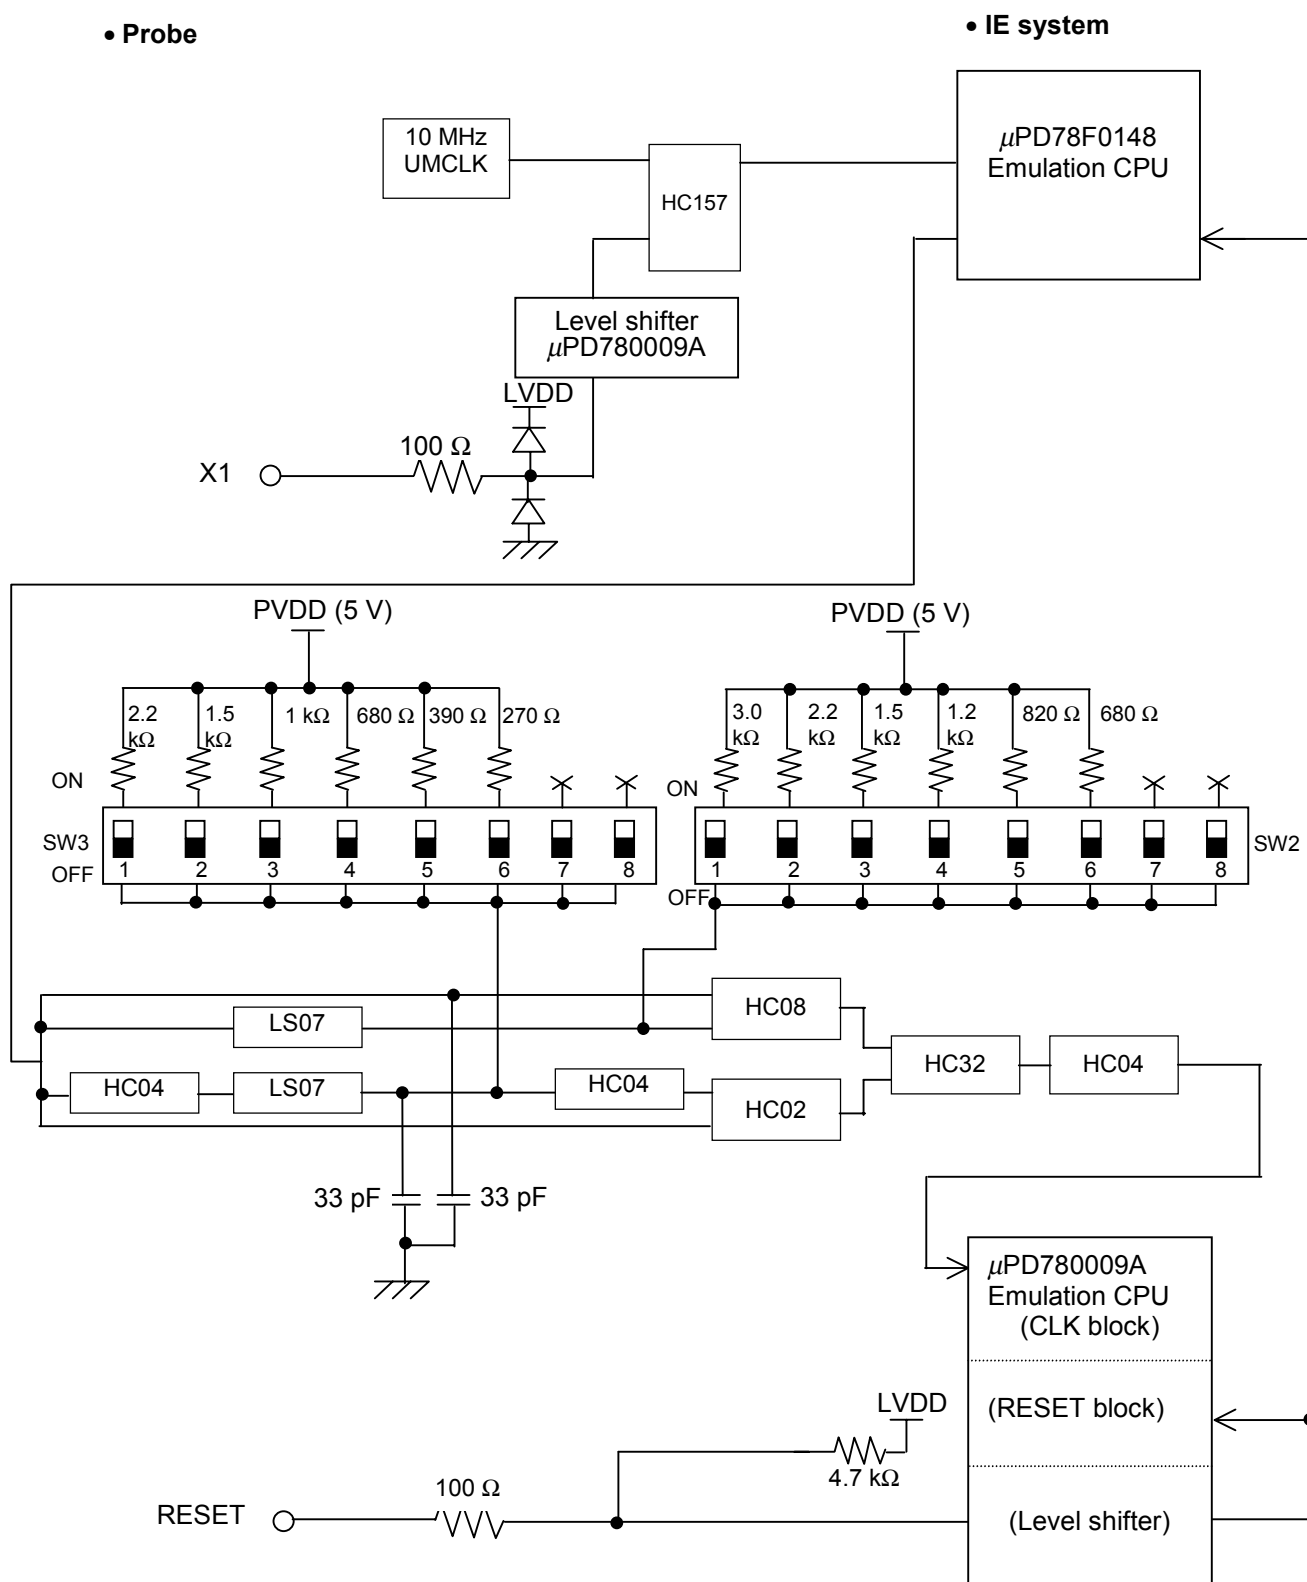


Figure 4-3. Equivalent Circuit of Emulation Circuit (c)

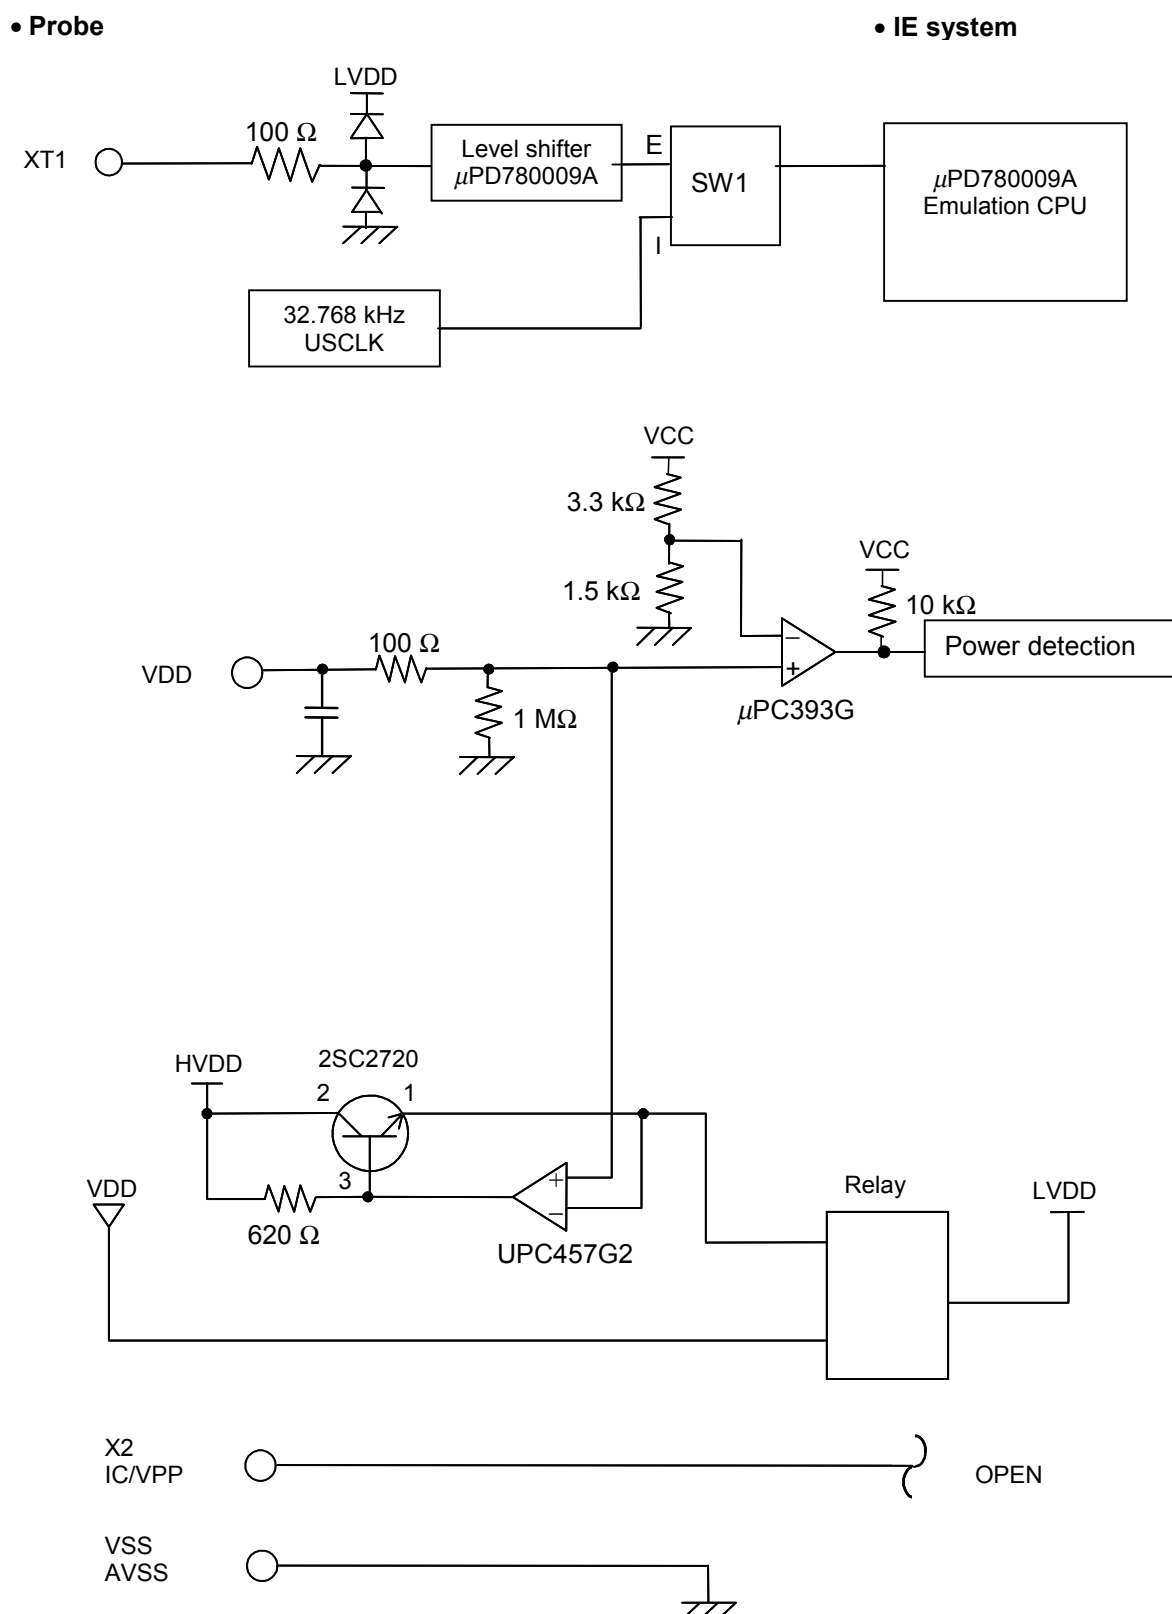

**(2) When  $\mu$ PD780111, 780112, 780113, and 78F0114 are emulated**

(a) Signals that are input/output from emulation CPU  $\mu$ PD78F0148

- P01 to P00
- P17 to P10
- P27 to P20
- P33 to P30
- P73 to P70
- P120
- P130
- AVREF

(b) Signals that are input/output from emulation CPU  $\mu$ PD780009A

- P63 to P60

(c) Other signals

- X1, X2, XT1, XT2,  $\overline{\text{RESET}}$ , IC/VPP, VDD, VSS, EVDD, EVSS, AVSS

Figure 4-4. Equivalent Circuit of Emulation Circuit (a)

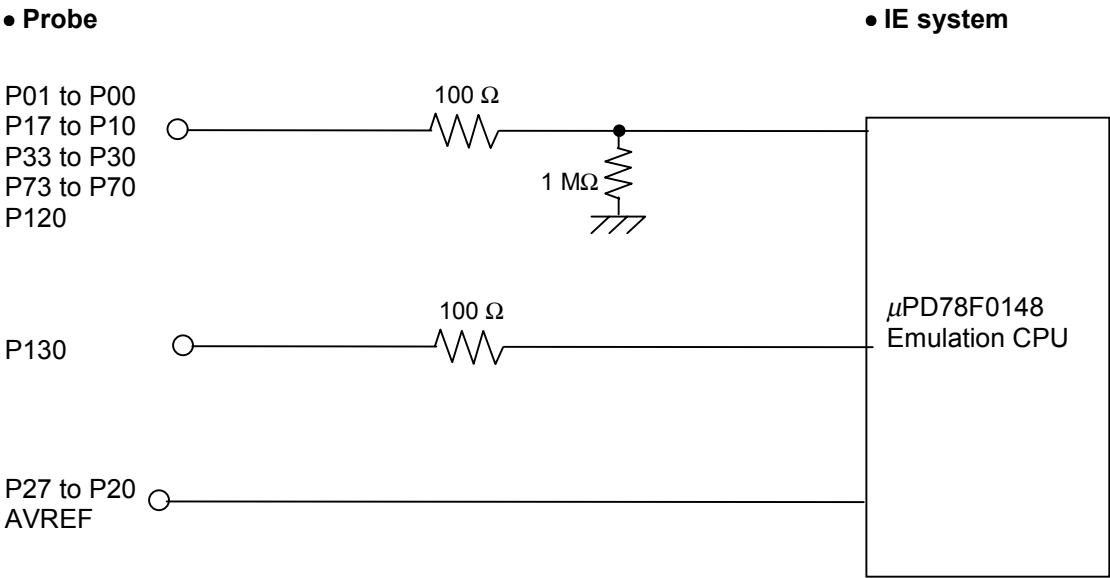


Figure 4-5. Equivalent Circuit of Emulation Circuit (b)

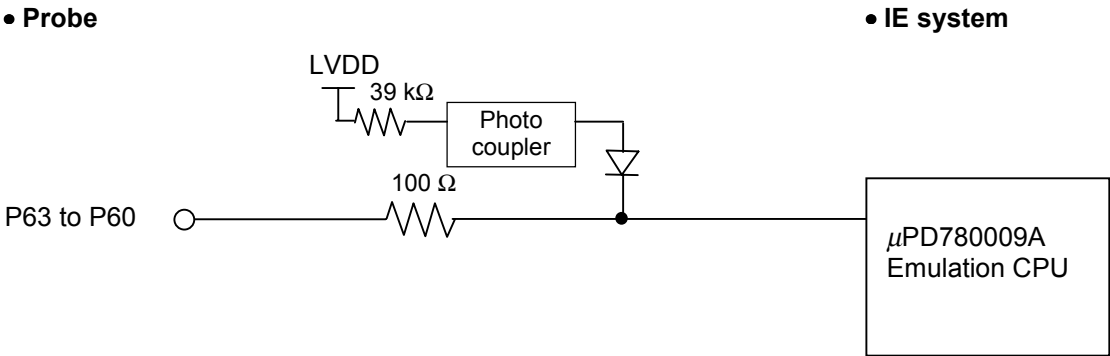


Figure 4-6. Equivalent Circuit of Emulation Circuit (c)


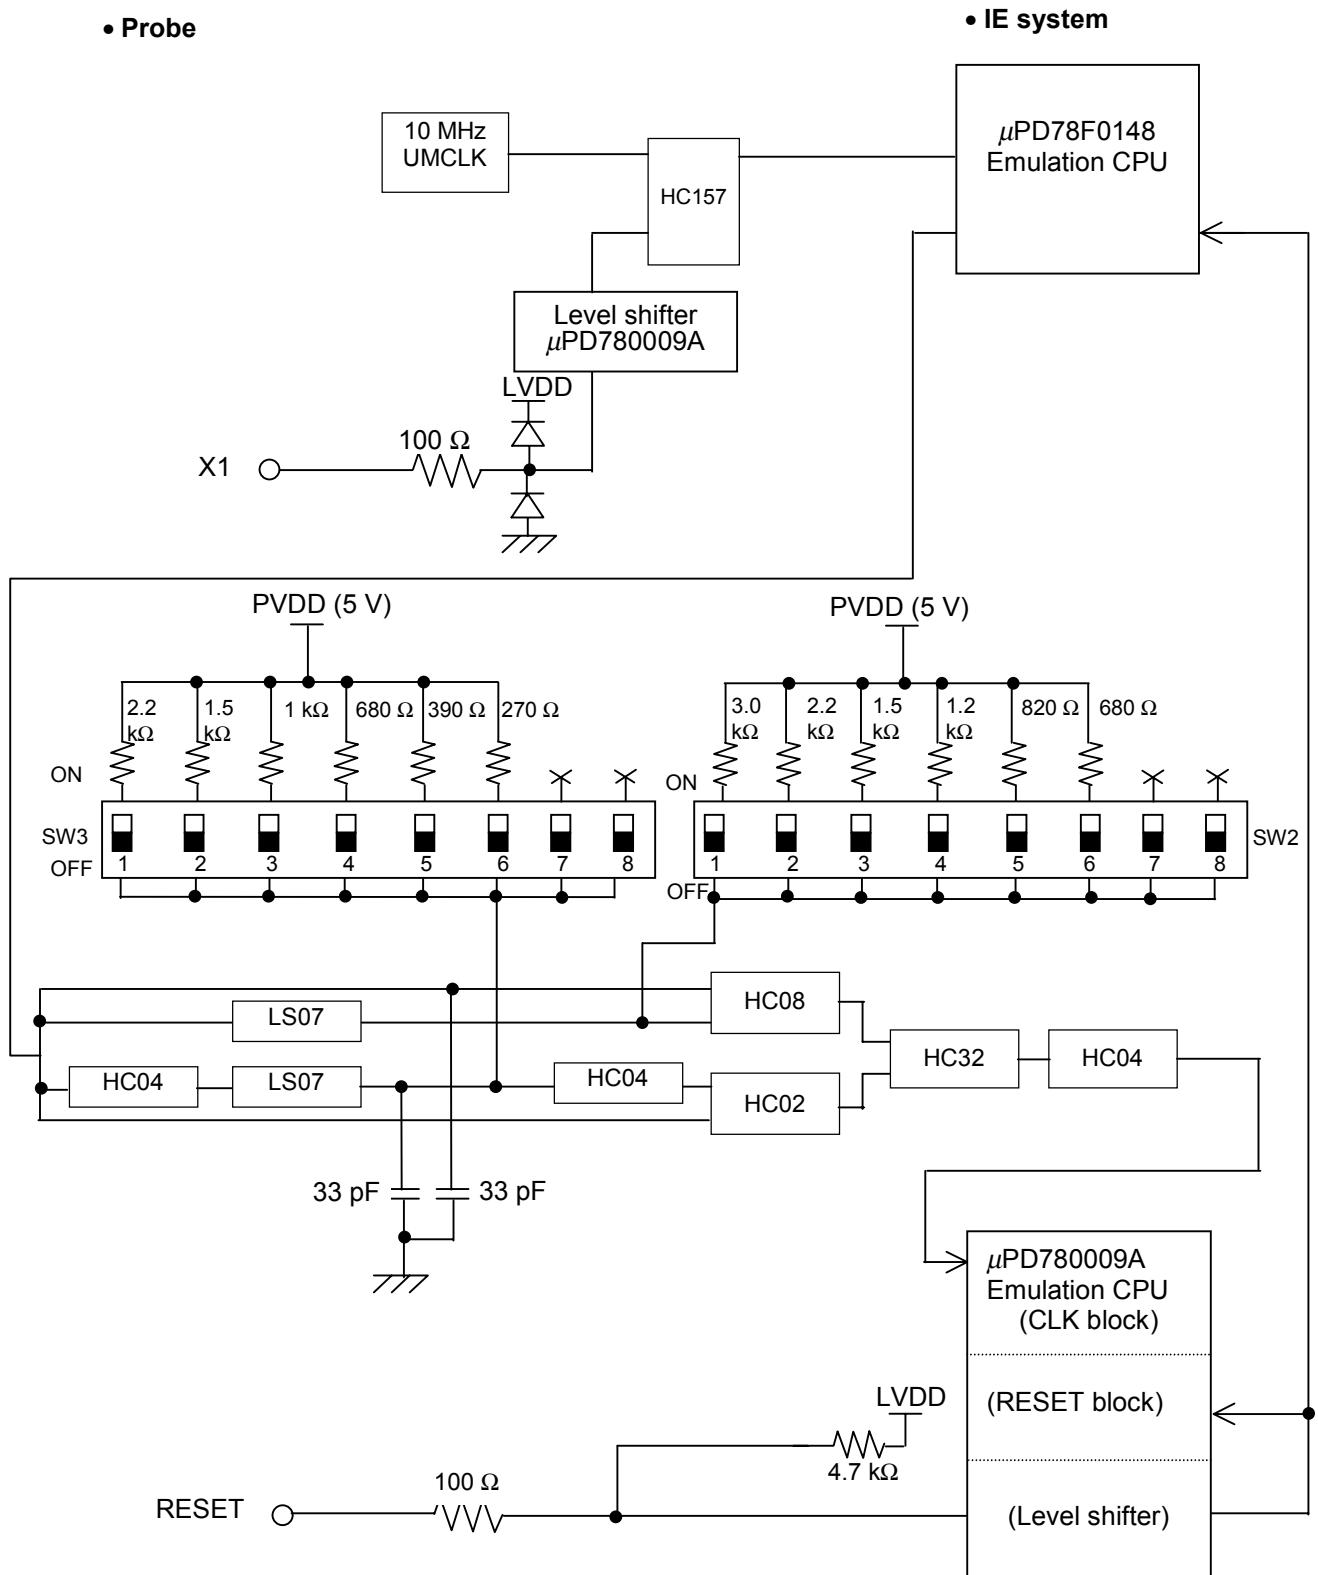


Figure 4-7. Equivalent Circuit of Emulation Circuit (c)

## • Probe

## • IE system

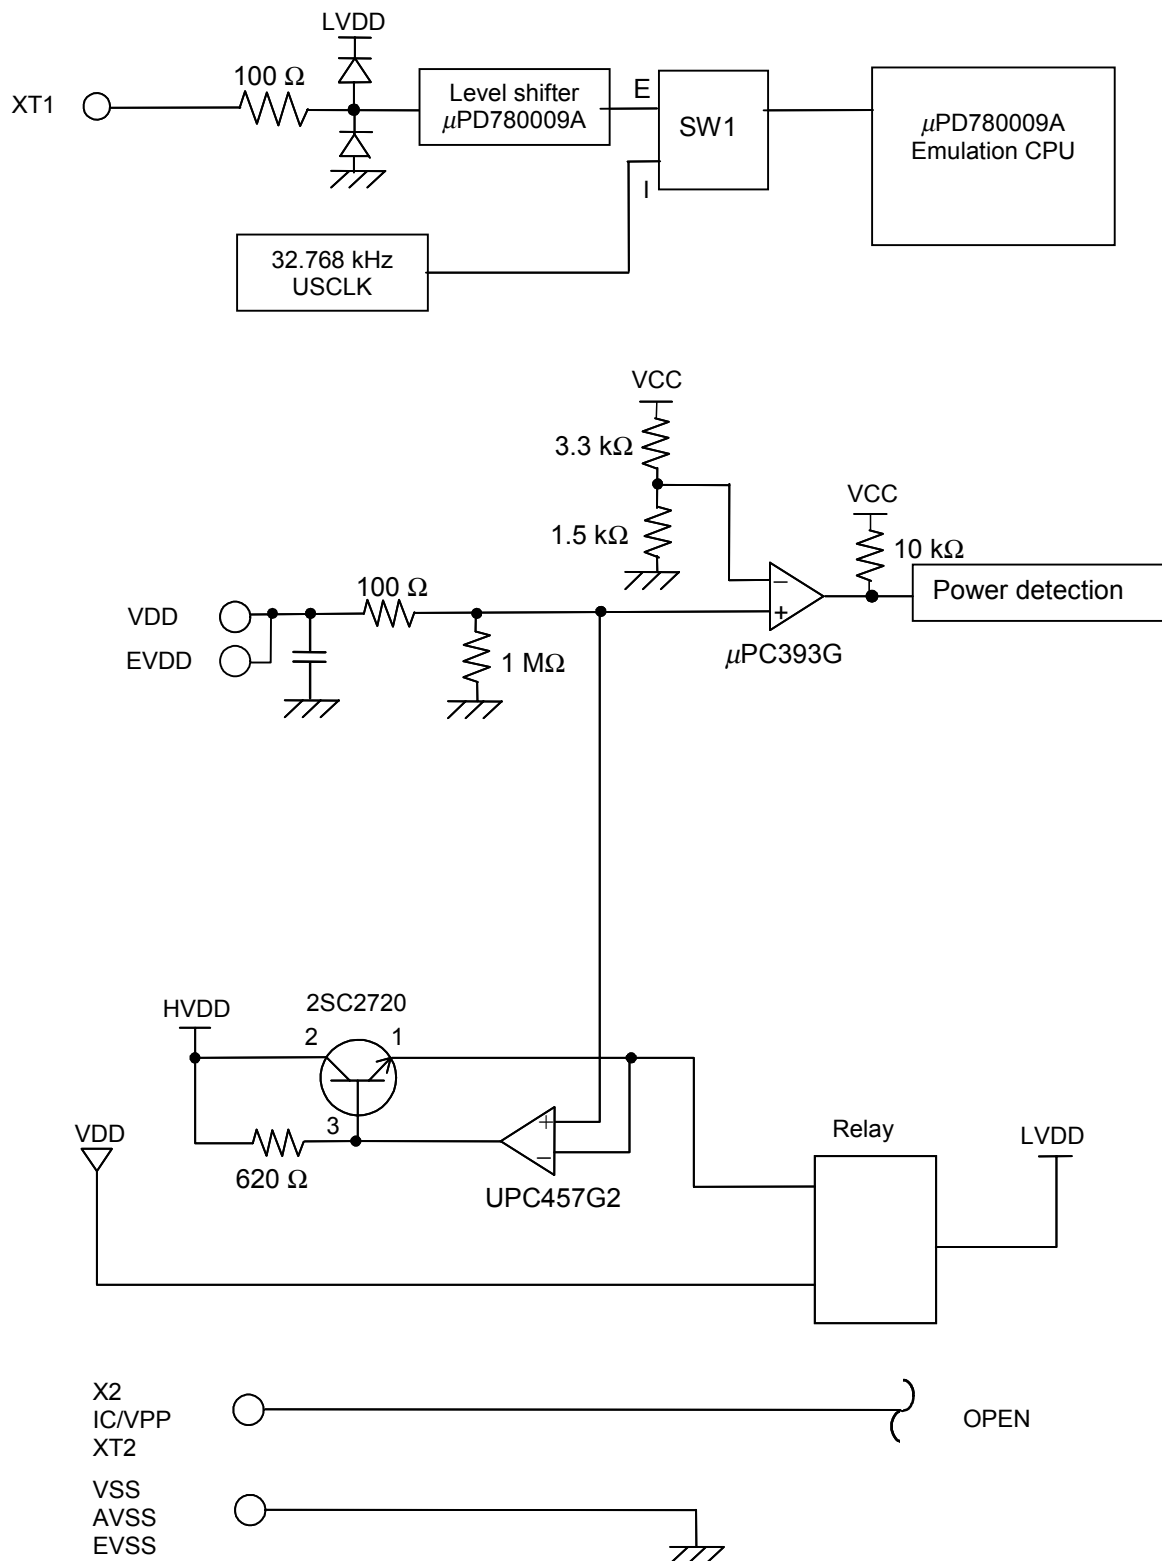

**(3) When  $\mu$ PD780120, 780121, 780123, 780124, and 78F0124 are emulated**

(a) Signals that are input/output from emulation CPU  $\mu$ PD78F0148

- P03 to P00
- P17 to P10
- P27 to P20
- P33 to P30
- P77 to P70
- P120
- P130
- P140
- AVREF

(b) Signals that are input/output from emulation CPU  $\mu$ PD780009A

- P63 to P60

(c) Other signals

- X1, X2, XT1, XT2,  $\overline{\text{RESET}}$ , IC/VPP, VDD, VSS, EVDD, EVSS, REGC, AVSS

Figure 4-8. Equivalent Circuit of Emulation Circuit (a)

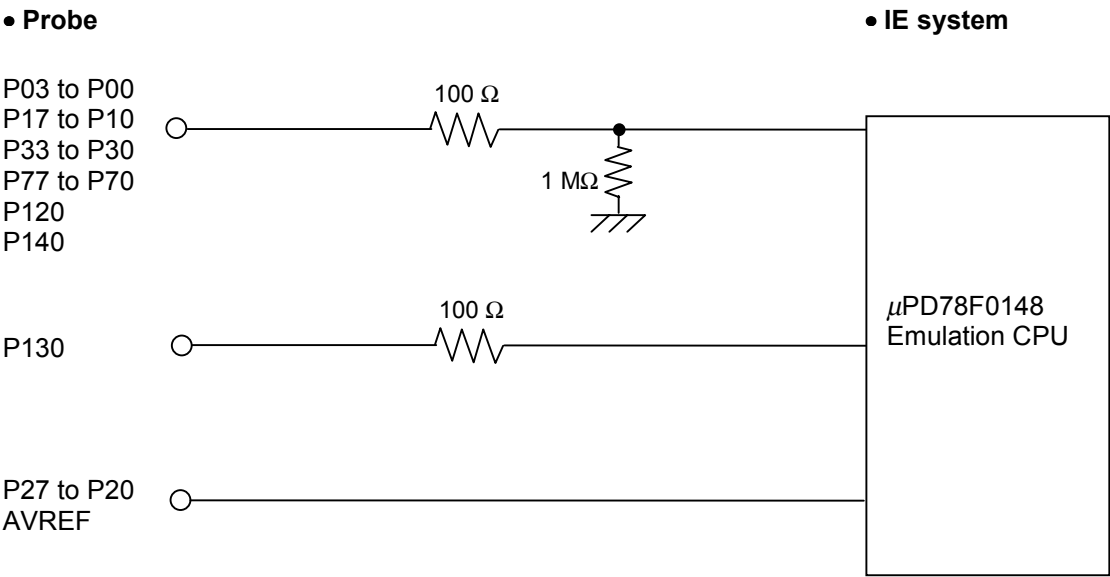


Figure 4-9. Equivalent Circuit of Emulation Circuit (b)



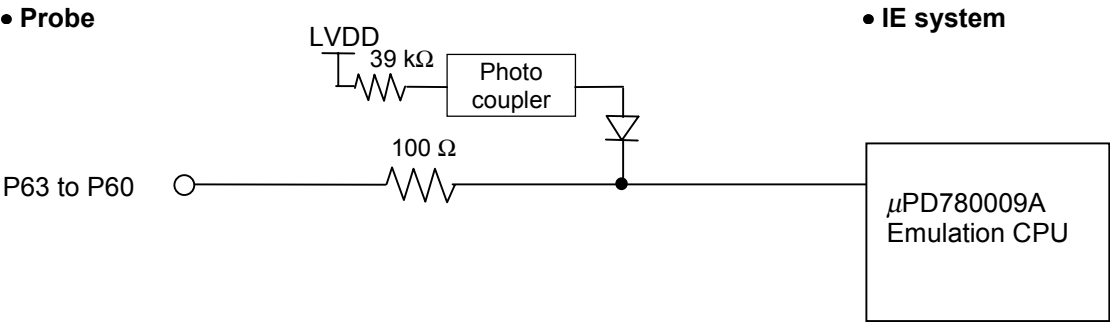


Figure 4-10. Equivalent Circuit of Emulation Circuit (c)

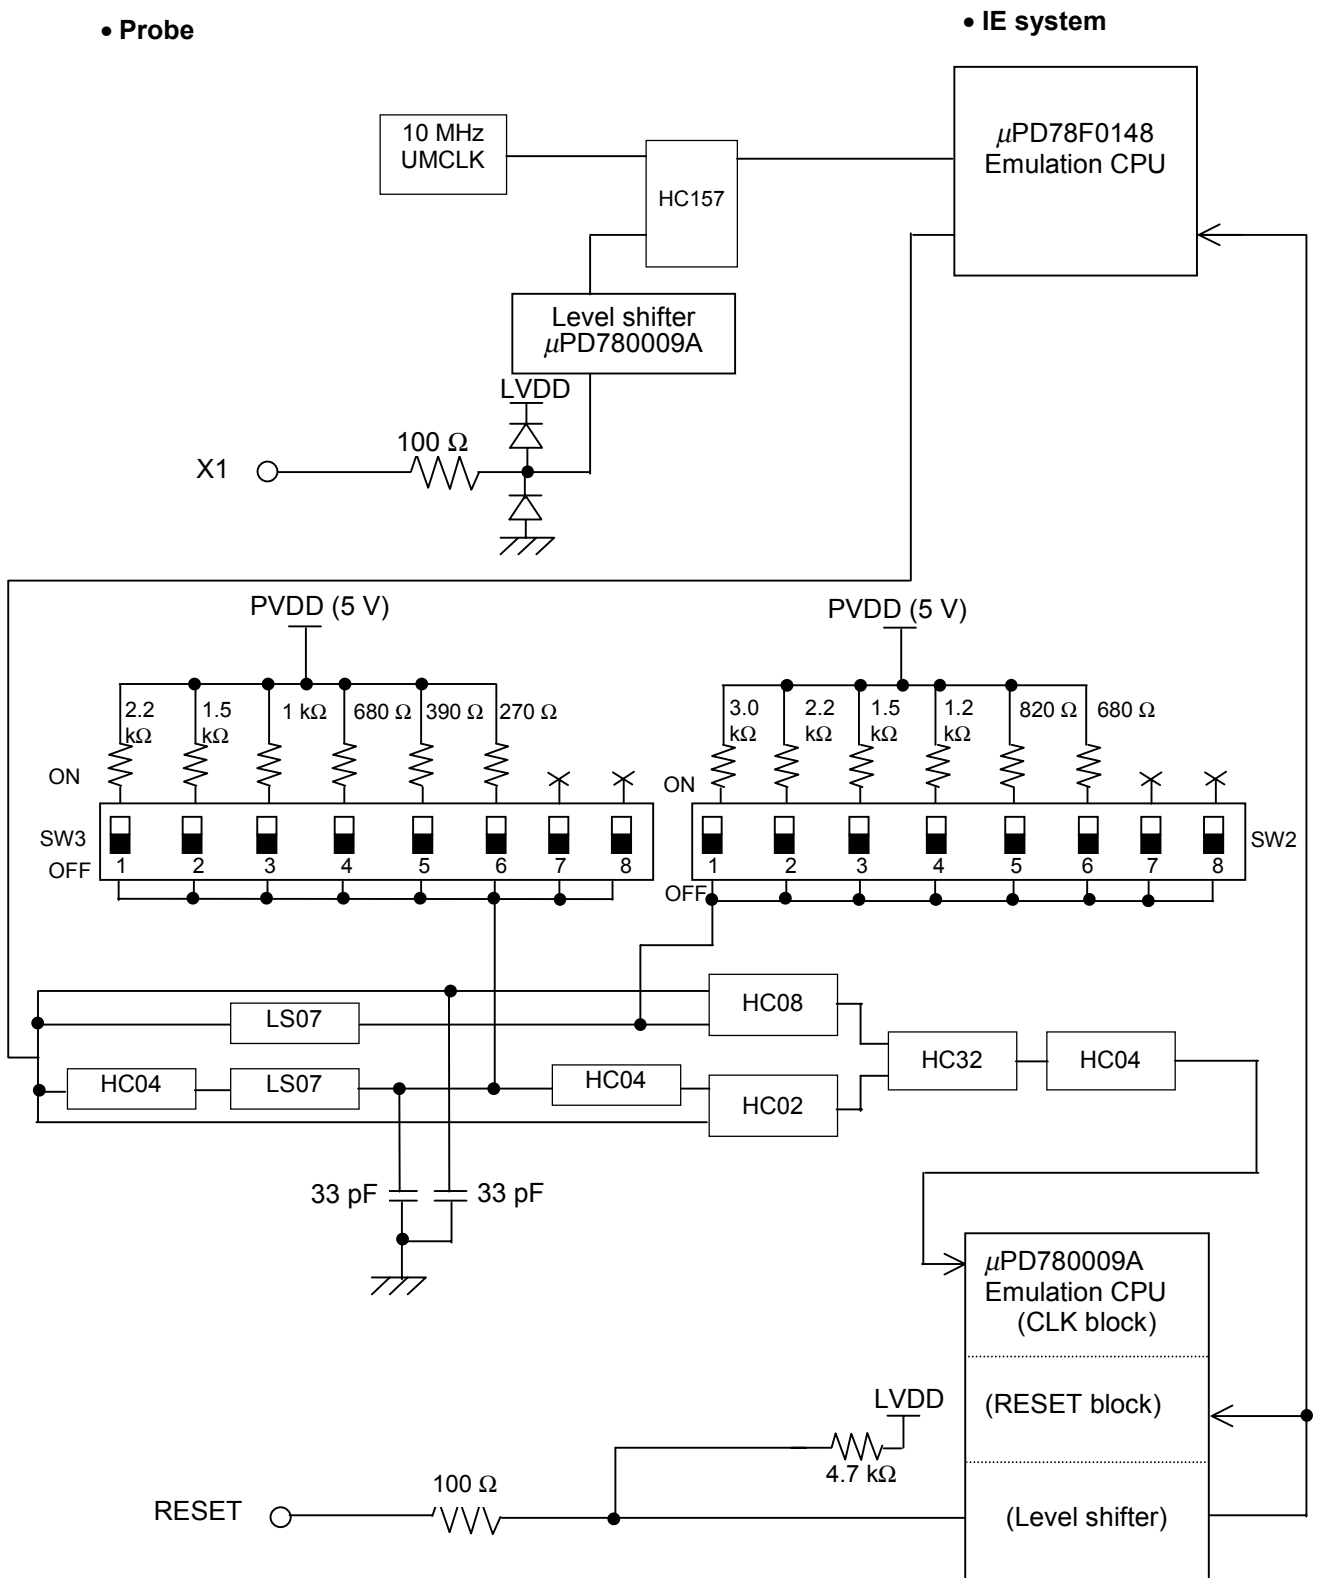

**Figure 4-11. Equivalent Circuit of Emulation Circuit (c)**

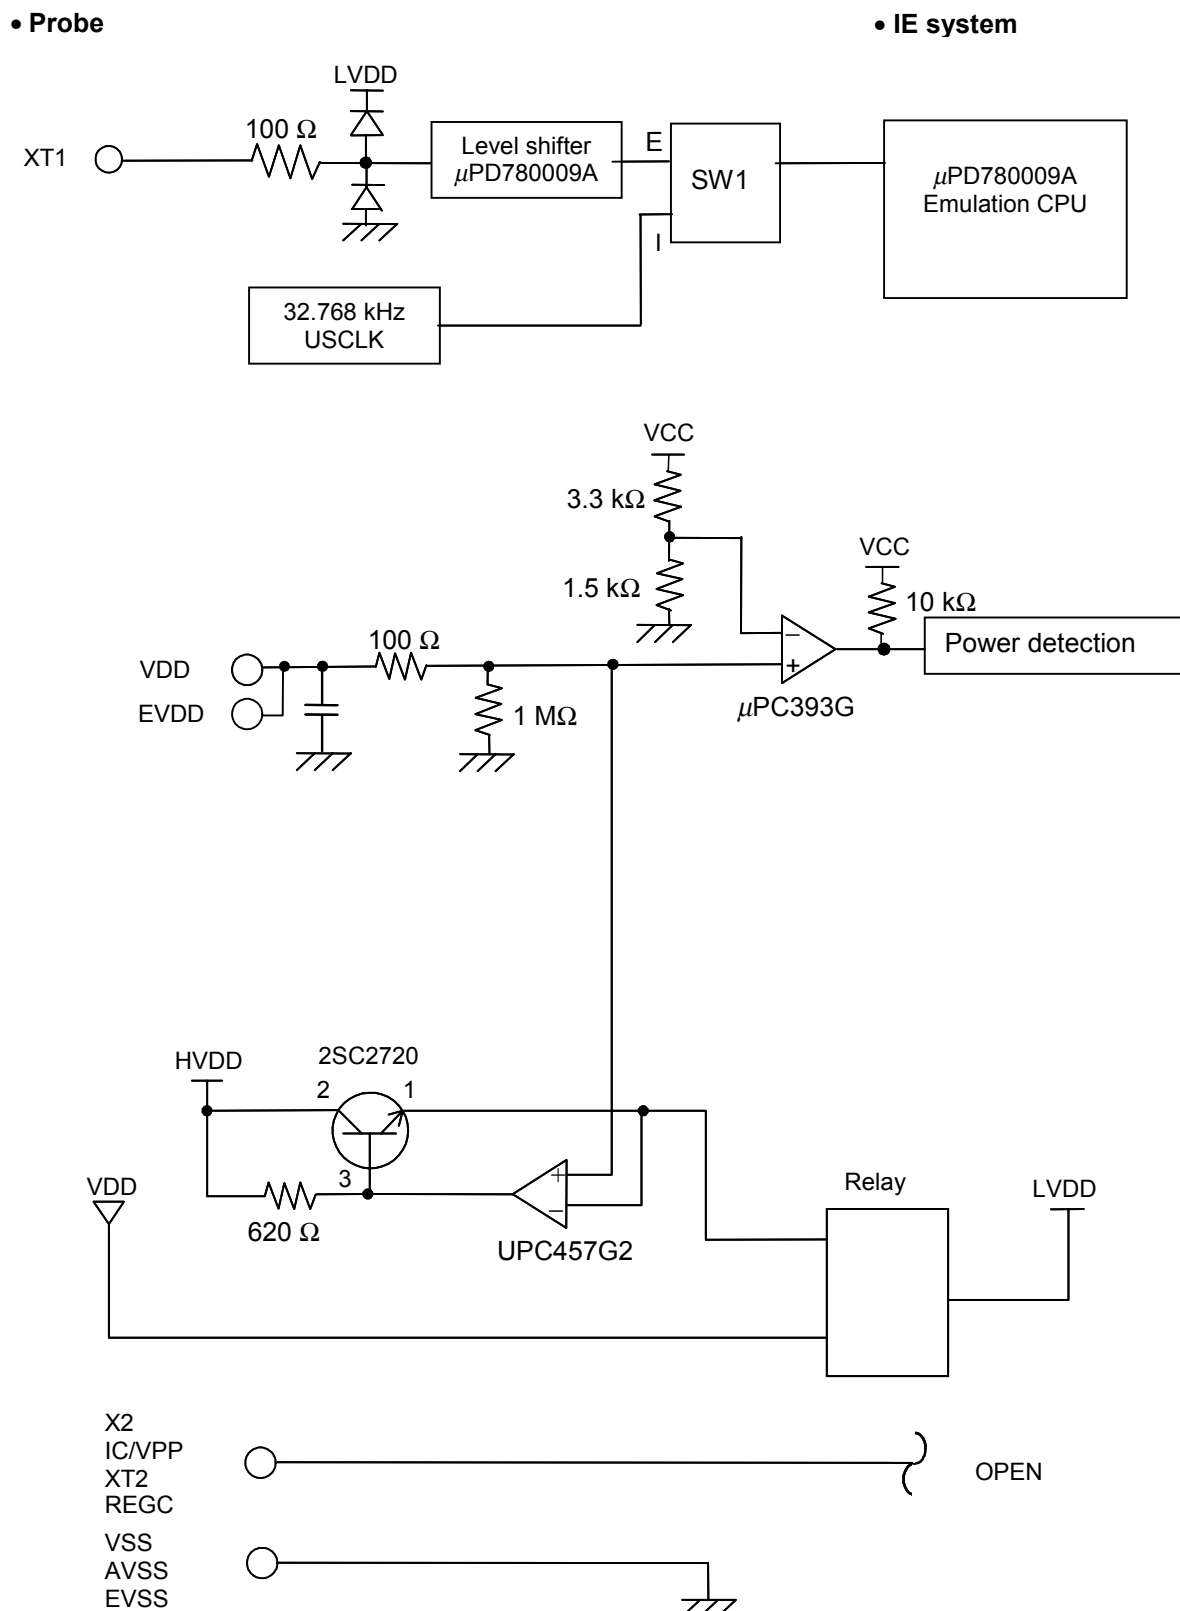

**(4) When  $\mu$ PD780131, 780132, 780133, 780134, 780136, 780138, 78F0134, and 78F0138 are emulated**

(a) Signals that are input/output from emulation CPU  $\mu$ PD78F0148

- P06 to P00
- P17 to P10
- P27 to P20
- P33 to P30
- P77 to P70
- P120
- P130
- P141 and P140
- AVREF

(b) Signals that are input/output from emulation CPU  $\mu$ PD780009A

- P43 to P40
- P53 to P50
- P63 to P60

(c) Other signals

- X1, X2, XT1, XT2, RESET, IC/VPP, VDD, VSS, EVDD, EVSS, REGC, AVSS

Figure 4-12. Equivalent Circuit of Emulation Circuit (a)

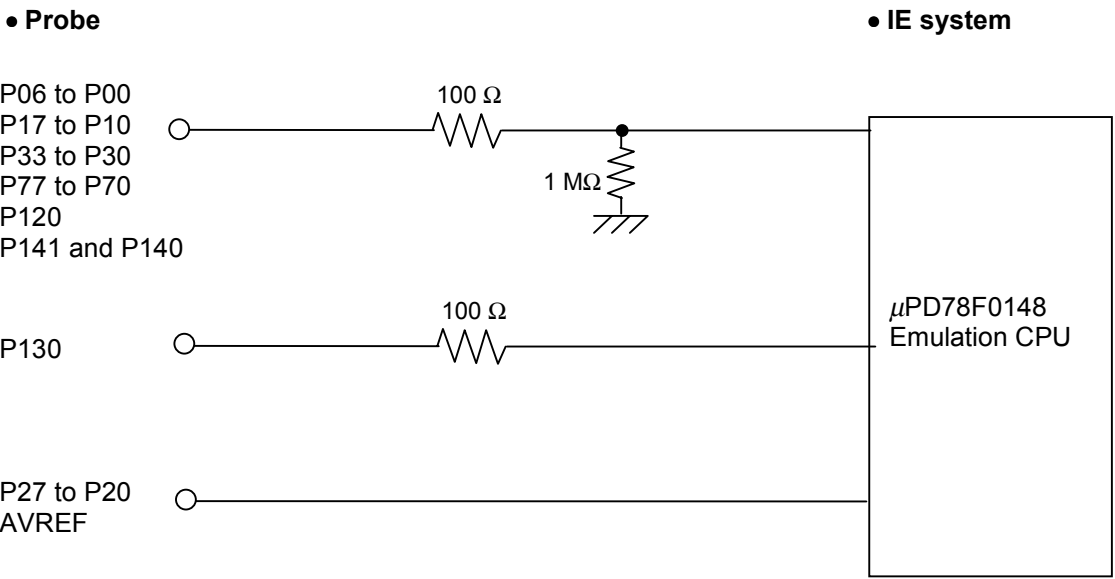


Figure 4-13. Equivalent Circuit of Emulation Circuit (b)

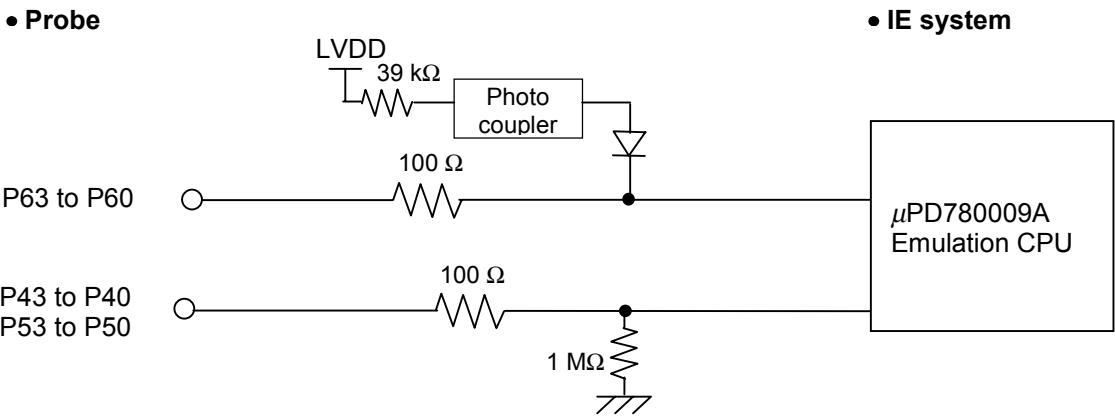


Figure 4-14. Equivalent Circuit of Emulation Circuit (c)


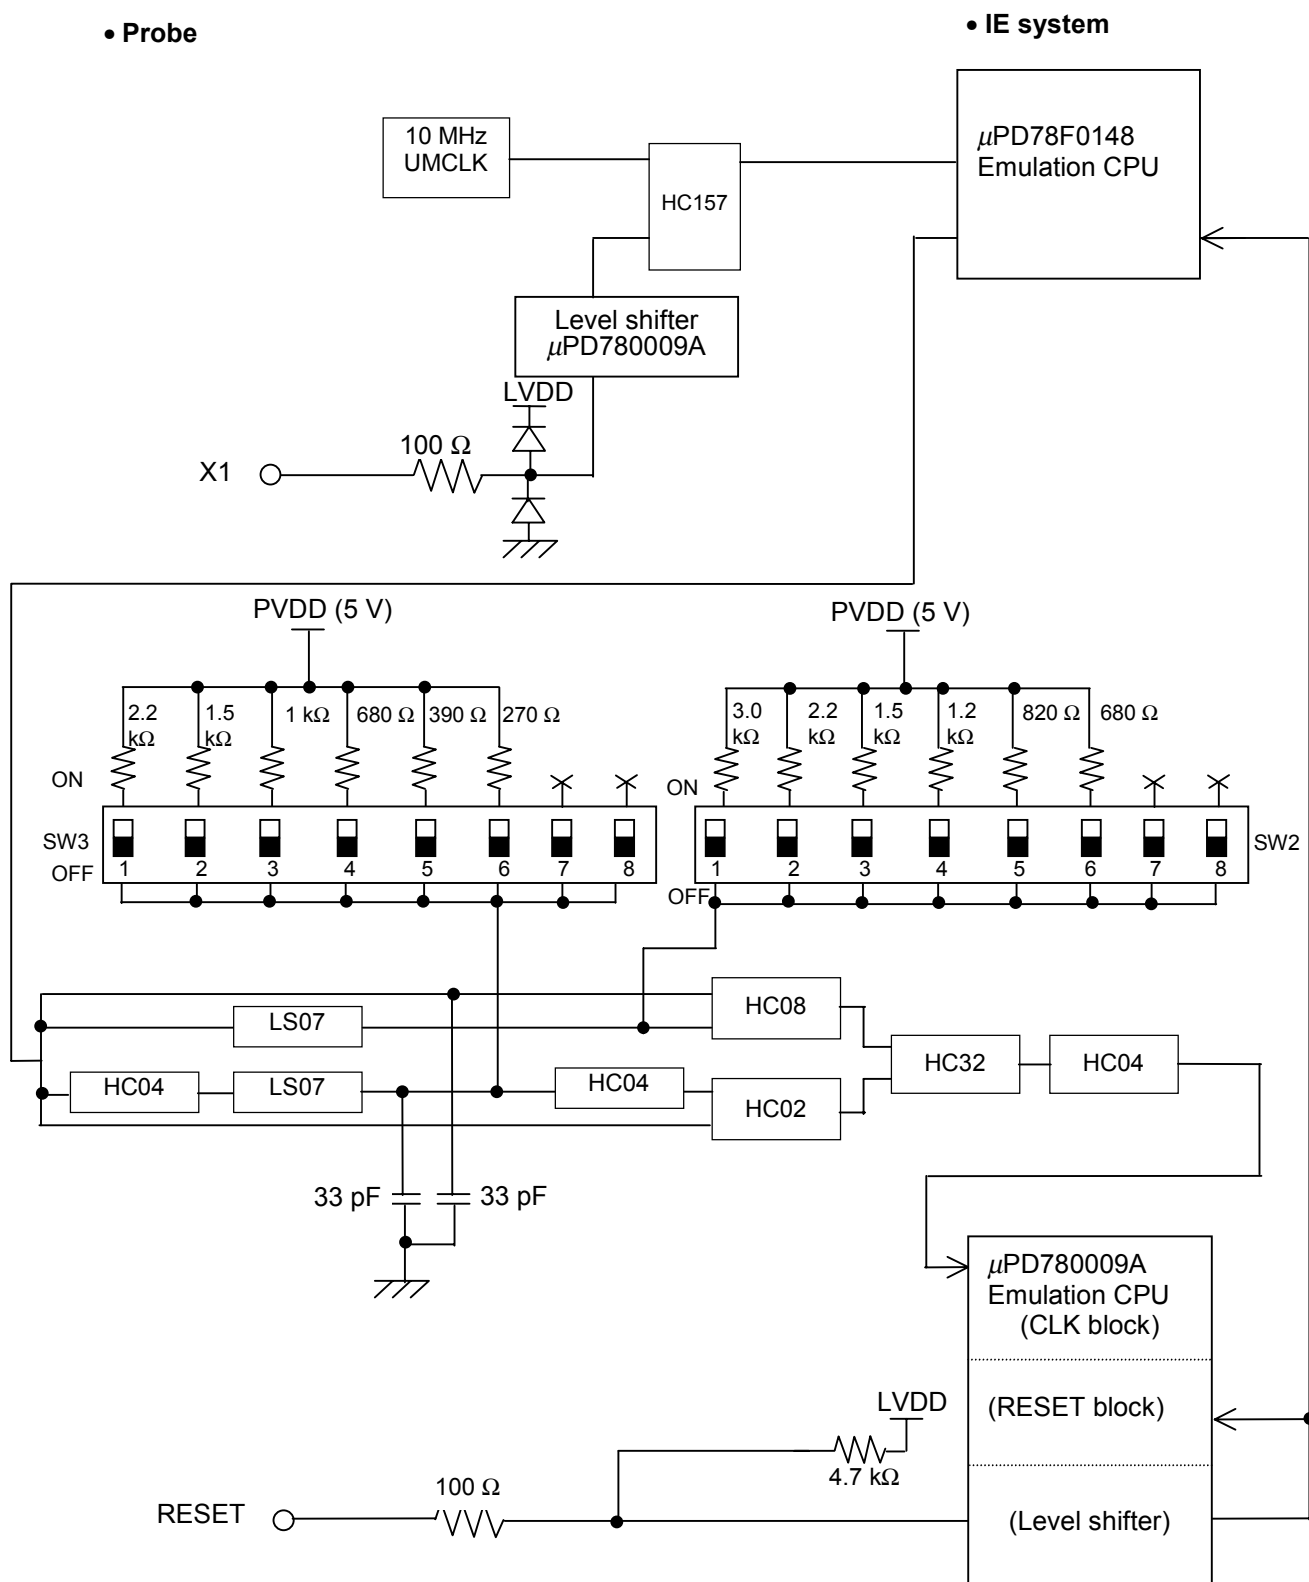


Figure 4-15. Equivalent Circuit of Emulation Circuit (c)

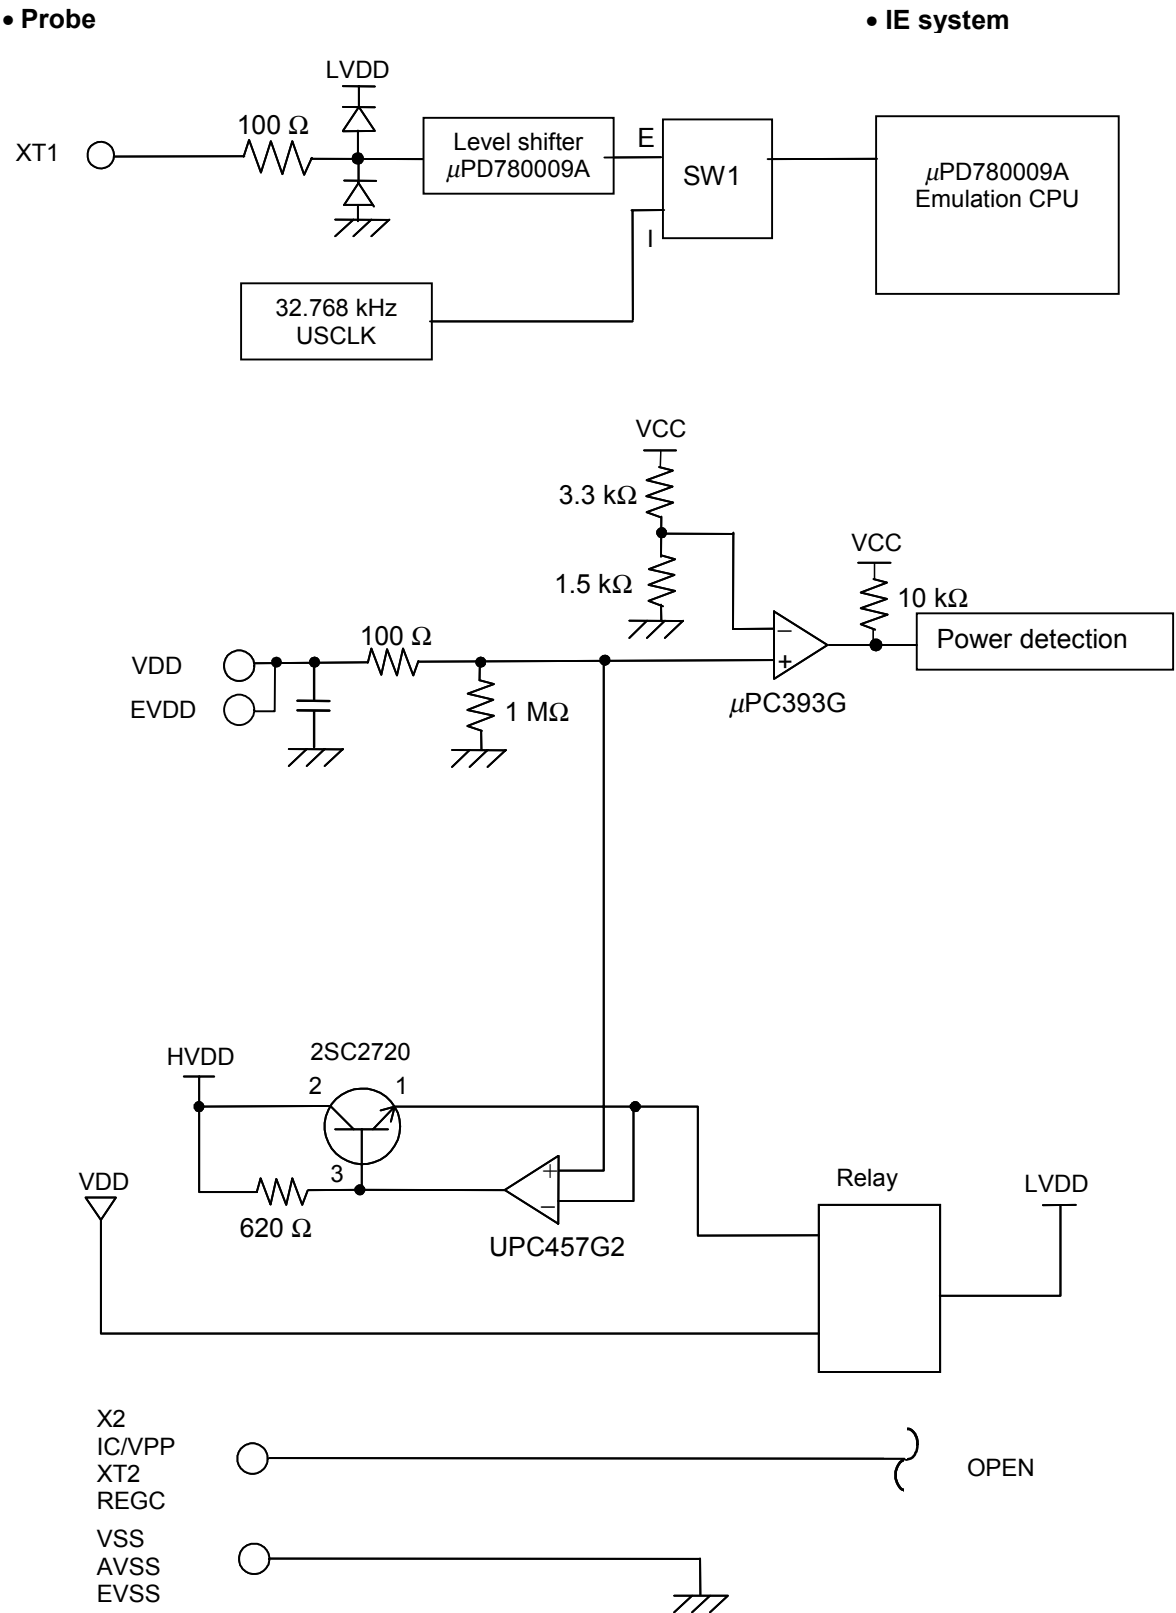

**(5) When  $\mu$ PD780143, 780144, 780146, 780148, and 78F0148 are emulated**(a) Signals that are input/output from emulation CPU  $\mu$ PD78F0148

- P06 to P00
- P17 to P10
- P27 to P20
- P33 to P30
- P77 to P70
- P120
- P130
- P145 to P140
- AVREF

(b) Signals that are input/output from emulation CPU  $\mu$ PD780009A

- P47 to P40
- P57 to P50
- P67 to P60

## (c) Other signals

- X1, X2, XT1, XT2, RESET, IC/VPP, VDD, VSS, EVDD, EVSS, REGC, AVSS

Figure 4-16. Equivalent Circuit of Emulation Circuit (a)

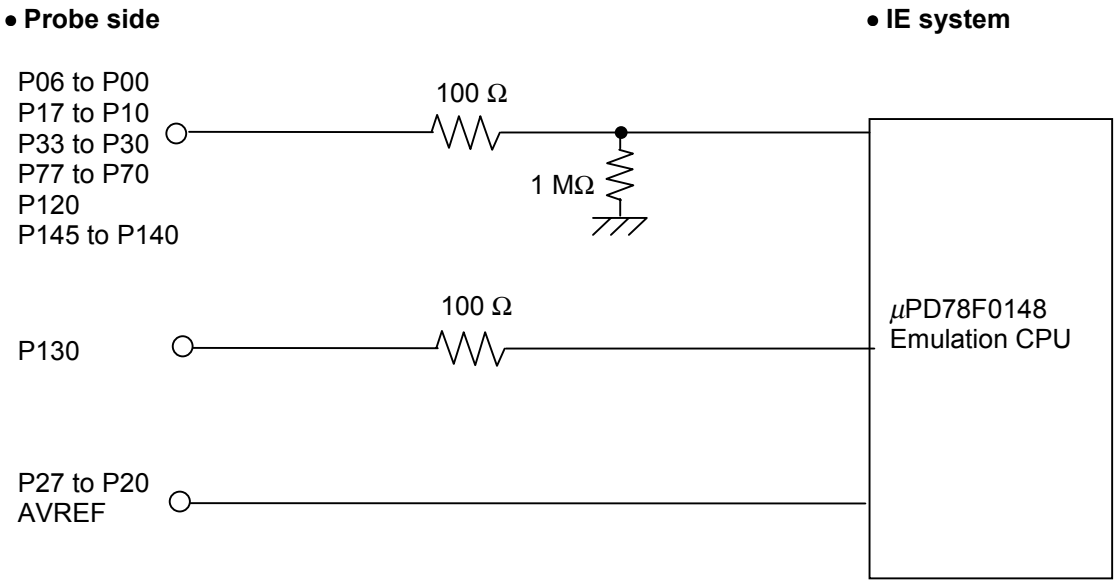


Figure 4-17. Equivalent Circuit of Emulation Circuit (b)



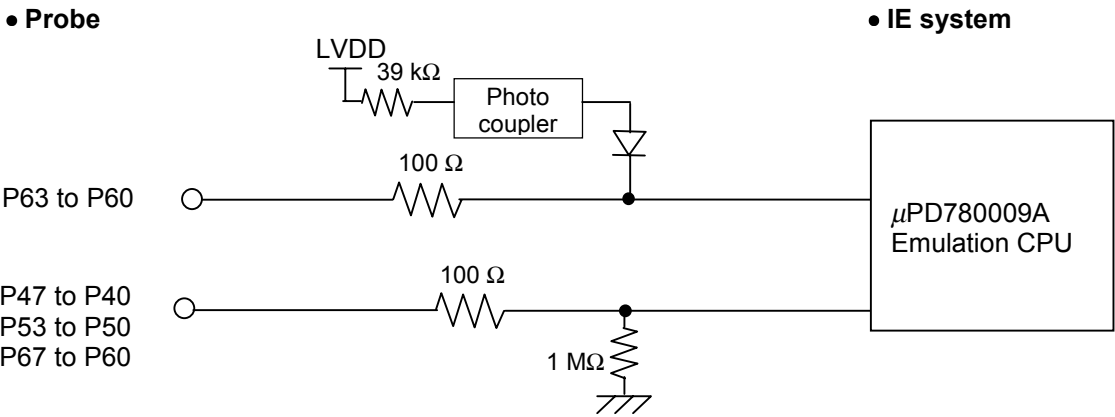


Figure 4-18. Equivalent Circuit of Emulation Circuit (c)

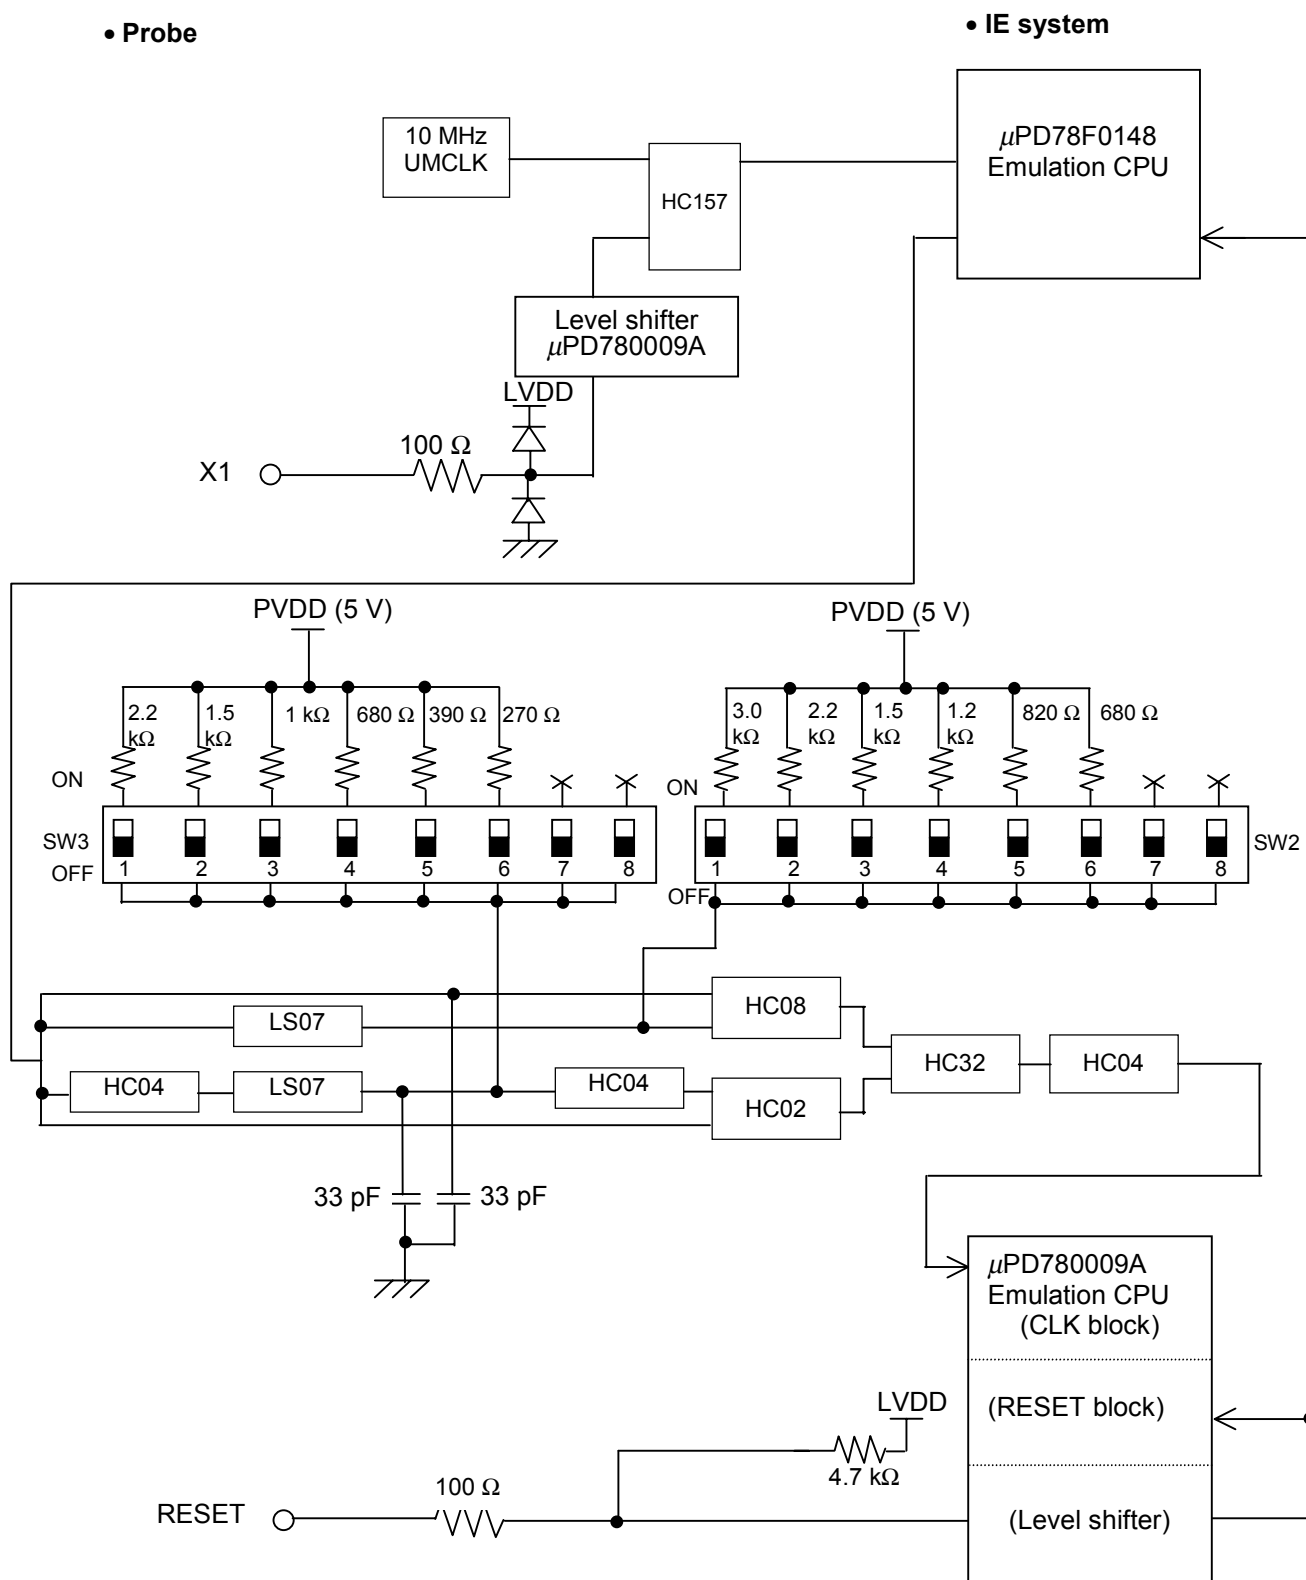

**Figure 4-19. Equivalent Circuit of Emulation Circuit (c)**

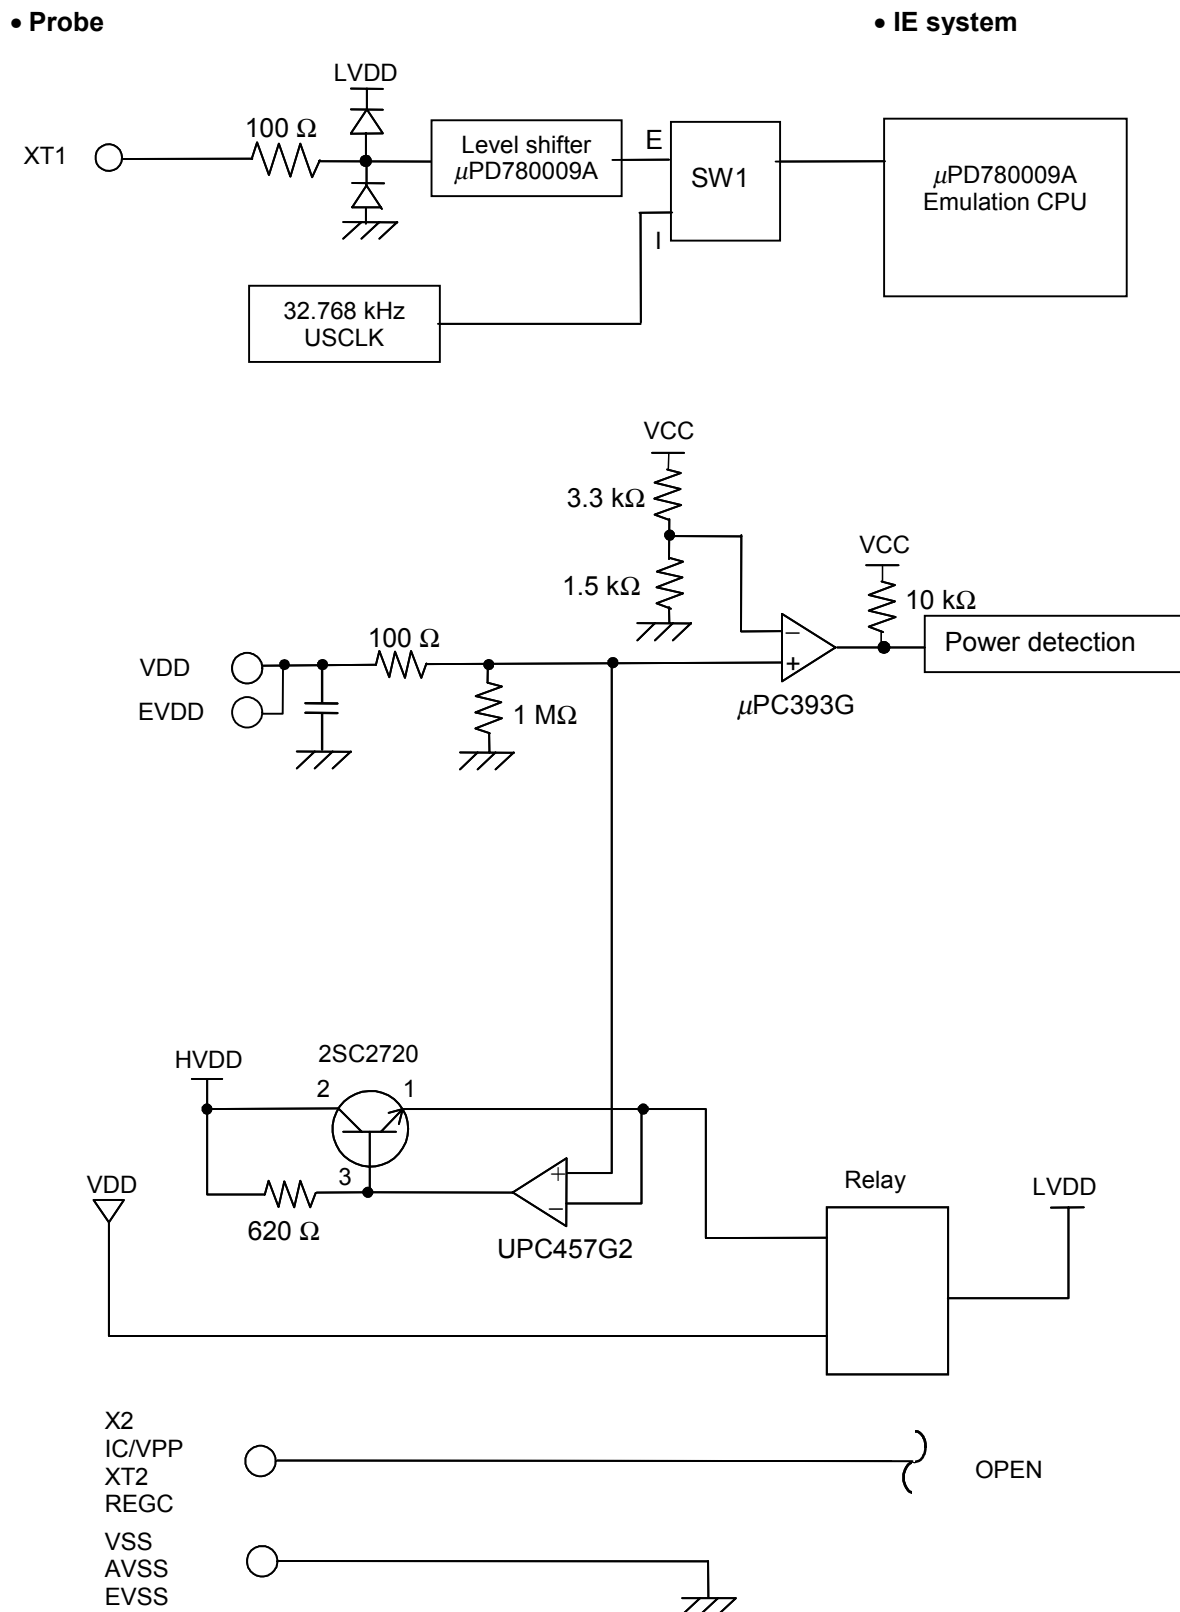

## CHAPTER 5 CAUTIONS ON USE

Observe the following cautions on use to avoid damaging the emulator.

- Do not place heavy objects on the emulator, or apply pressure to it.
- Do not drop the emulator, or subject it to physical shock or vibration.
- Do not use the emulator in a hot, humid or dusty environment. Avoid using or storing the emulator in a location where it is exposed to direct sunlight.
- Avoid subjecting the emulator to sudden environmental changes (in temperature or humidity)
- Do not spill liquids on the emulator.
- Do not use the connectors or cables of a different product.

## APPENDIX A EMULATION PROBE PIN CORRESPONDENCE TABLE

**Table A-1. Pin Correspondence of 78010X PROBE Board + Emulation Probe**

| Emulation Probe<br>Device Side | 78010x PROBE Board<br>CN1 | IE-78K0K1-ET<br>CN2 |
|--------------------------------|---------------------------|---------------------|
| 1                              | 58                        | 107                 |
| 2                              | 56                        | 104                 |
| 3                              | 49                        | 103                 |
| 4                              | 55                        | 100                 |
| 5                              | 19                        | 99                  |
| 6                              | 18                        | 30                  |
| 7                              | 22                        | 94                  |
| 8                              | 62                        | 29                  |
| 9                              | 65                        | 24                  |
| 10                             | 66                        | 23                  |
| 11                             | 92                        | 8                   |
| 12                             | 91                        | 7                   |
| 13                             | 98                        | 14                  |
| 14                             | 97                        | 13                  |
| 15                             | 21                        | 15                  |
| 16                             | 99                        | 10                  |
| 17                             | 63                        | 9                   |
| 18                             | 64                        | 37                  |
| 19                             | 70                        | 43                  |
| 20                             | 69                        | 44                  |
| 21                             | 72                        | 47                  |
| 22                             | 102                       | 48                  |
| 23                             | 71                        | 16                  |
| 24                             | 94                        | 76                  |
| 25                             | 93                        | 79                  |
| 26                             | 30                        | 80                  |
| 27                             | 29                        | 85                  |
| 28                             | 24                        | 114                 |
| 29                             | 23                        | 113                 |
| 30                             | 20                        | 108                 |

**Remarks 1.** The emulation probe is the NP-30MC.

The NP-30MC is a product of Naito Densai Machida Mfg. Co., Ltd.

2. The numbers in the Emulation Probe Device Side column refer to the pin number of the target system.
3. The numbers in the 78010X PROBE Board CN1 column refer to the 78010X PROBE Board pin to be connected to the emulation probe.
4. The numbers in the IE-78K0K1-ET CN2 column refer to the IE-78K0K1-ET pin to be connected to the 78010X PROBE Board.

**Table A-2. Pin Correspondence of 78011X PROBE Board + Emulation Probe**

| Emulation Probe<br>Device Side | 78011X PROBE Board<br>CN1 | IE-78K0K1-ET<br>CN2 |
|--------------------------------|---------------------------|---------------------|
| 1                              | 104                       | 114                 |
| 2                              | 103                       | 113                 |
| 3                              | 100                       | 99                  |
| 4                              | 99                        | 94                  |
| 5                              | 94                        | 30                  |
| 6                              | 93                        | 29                  |
| 7                              | 30                        | 24                  |
| 8                              | 29                        | 23                  |
| 9                              | 24                        | 20                  |
| 10                             | 23                        | 19                  |
| 11                             | 20                        | 16                  |
| 12                             | 47                        | 108                 |
| 13                             | 48                        | 107                 |
| 14                             | 51                        | 104                 |
| 15                             | 52                        | 103                 |
| 16                             | 57                        | 100                 |
| 17                             | 58                        | 48                  |
| 18                             | 59                        | 56                  |
| 19                             | 60                        | 55                  |
| 20                             | 55                        | 58                  |
| 21                             | 56                        | 57                  |
| 22                             | 49                        | 59                  |
| 23                             | 18                        | 60                  |
| 24                             | 17                        | 47                  |
| 25                             | 22                        | 44                  |
| 26                             | 21                        | 43                  |
| 27                             | 28                        | 37                  |
| 28                             | 27                        | 9                   |
| 29                             | 92                        | 10                  |
| 30                             | 91                        | 15                  |
| 31                             | 98                        | 14                  |
| 32                             | 97                        | 13                  |
| 33                             | 102                       | 64                  |
| 34                             | 73                        | 61                  |
| 35                             | 72                        | 62                  |
| 36                             | 69                        | 65                  |
| 37                             | 70                        | 66                  |
| 38                             | 63                        | 71                  |
| 39                             | 64                        | 72                  |
| 40                             | 61                        | 75                  |
| 41                             | 62                        | 76                  |
| 42                             | 65                        | 79                  |
| 43                             | 66                        | 80                  |
| 44                             | 71                        | 85                  |

**Remarks** 1. The emulation probe is the NP-44GB, NP-44GB-TQ, or H44GB-TQ.

The NP-44GB, NP-44GB-TQ, and H44GB-TQ are products of Naito Densetsu Machida Mfg. Co., Ltd.

2. The numbers in the Emulation Probe Device Side column refer to the pin number of the target system.
3. The numbers in the 78011X PROBE Board CN1 column refer to the 78011X PROBE Board pin to be connected to the emulation probe.
4. The numbers in the IE-78K0K1-ET CN2 column refer to the IE-78K0K1-ET pin to be connected to the 78011X PROBE Board.

**Table A-3. Pin Correspondence of 78012X PROBE Board + Emulation Probe**

| Emulation Probe<br>Device Side | 78012X PROBE Board<br>CN1 | IE-78K0K1-ET<br>CN2 |
|--------------------------------|---------------------------|---------------------|
| 1                              | 118                       | 114                 |
| 2                              | 114                       | 113                 |
| 3                              | 108                       | 99                  |
| 4                              | 104                       | 94                  |
| 5                              | 100                       | 93                  |
| 6                              | 94                        | 30                  |
| 7                              | 30                        | 29                  |
| 8                              | 29                        | 24                  |
| 9                              | 24                        | 23                  |
| 10                             | 20                        | 20                  |
| 11                             | 16                        | 19                  |
| 12                             | 10                        | 16                  |
| 13                             | 6                         | 108                 |
| 14                             | 33                        | 107                 |
| 15                             | 37                        | 104                 |
| 16                             | 43                        | 103                 |
| 17                             | 47                        | 100                 |
| 18                             | 51                        | 51                  |
| 19                             | 57                        | 48                  |
| 20                             | 59                        | 47                  |
| 21                             | 55                        | 44                  |
| 22                             | 49                        | 56                  |
| 23                             | 45                        | 55                  |
| 24                             | 41                        | 58                  |
| 25                             | 35                        | 57                  |
| 26                             | 31                        | 59                  |
| 27                             | 4                         | 60                  |
| 28                             | 8                         | 43                  |
| 29                             | 14                        | 37                  |
| 30                             | 18                        | 9                   |
| 31                             | 22                        | 10                  |
| 32                             | 28                        | 15                  |
| 33                             | 92                        | 8                   |
| 34                             | 91                        | 7                   |
| 35                             | 98                        | 14                  |
| 36                             | 102                       | 13                  |
| 37                             | 106                       | 74                  |
| 38                             | 112                       | 69                  |
| 39                             | 116                       | 70                  |
| 40                             | 87                        | 63                  |
| 41                             | 83                        | 64                  |
| 42                             | 77                        | 61                  |
| 43                             | 73                        | 62                  |
| 44                             | 69                        | 65                  |
| 45                             | 63                        | 66                  |
| 46                             | 61                        | 71                  |

|    |    |    |
|----|----|----|
| 47 | 65 | 72 |
| 48 | 71 | 75 |
| 49 | 75 | 76 |
| 50 | 79 | 79 |
| 51 | 85 | 80 |
| 52 | 89 | 85 |

**Remarks 1.** The emulation probe is the NP-H52GB-TQ.

The NP-H52GB-TQ is a product of Naito Densai Machida Mfg. Co., Ltd.

2. The numbers in the Emulation Probe Device Side column refer to the pin number of the target system.
3. The numbers in the 78012X PROBE Board CN1 column refer to the 78012X PROBE Board pin to be connected to the emulation probe.
4. The numbers in the IE-78K0K1-ET CN2 column refer to the IE-78K0K1-ET pin to be connected to the 78012X PROBE Board.

**Table A-4. Pin Correspondence of 78013X PROBE Board + Emulation Probe (1/2)**

| Emulation Probe<br>Device Side | 78013x PROBE Board<br>CN1 | IE-78K0K1-ET<br>CN2 |
|--------------------------------|---------------------------|---------------------|
| 1                              | 108                       | 114                 |
| 2                              | 107                       | 113                 |
| 3                              | 104                       | 99                  |
| 4                              | 103                       | 94                  |
| 5                              | 100                       | 93                  |
| 6                              | 99                        | 30                  |
| 7                              | 94                        | 29                  |
| 8                              | 93                        | 24                  |
| 9                              | 30                        | 23                  |
| 10                             | 29                        | 20                  |
| 11                             | 24                        | 19                  |
| 12                             | 23                        | 16                  |
| 13                             | 20                        | 108                 |
| 14                             | 19                        | 107                 |
| 15                             | 16                        | 104                 |
| 16                             | 15                        | 103                 |
| 17                             | 43                        | 100                 |
| 18                             | 44                        | 51                  |
| 19                             | 47                        | 52                  |
| 20                             | 48                        | 48                  |
| 21                             | 51                        | 47                  |
| 22                             | 52                        | 44                  |
| 23                             | 57                        | 43                  |
| 24                             | 58                        | 37                  |
| 25                             | 59                        | 9                   |
| 26                             | 60                        | 10                  |
| 27                             | 55                        | 15                  |
| 28                             | 56                        | 56                  |
| 29                             | 49                        | 55                  |
| 30                             | 50                        | 58                  |
| 31                             | 45                        | 57                  |
| 32                             | 46                        | 59                  |

**Remarks 1.** The emulation probe is the NP-64GB-TQ, H64GB-TQ, H64GK, H64GK-TQ, H64GC, H64GC-TQ, or H64GC-TQ.

The NP-64GB-TQ, H64GB-TQ, H64GK, H64GK-TQ, H64GC, H64GC-TQ, and H64GC-TQ are products of Naito Densei Machida Mfg. Co., Ltd.

2. The numbers in the Emulation Probe Device Side column refer to the pin number of the target system.
3. The numbers in the 78013X PROBE Board CN1 column refer to the 78013X PROBE Board pin to be connected to the emulation probe.
4. The numbers in the IE-78K0K1-ET CN2 column refer to the IE-78K0K1-ET pin to be connected to the 78013X PROBE Board.

**Table A-4. Pin Correspondence of 78013X PROBE Board + Emulation Probe (2/2)**

| Emulation Probe<br>Device Side | 78013x PROBE Board<br>CN1 | IE-78K0K1-ET<br>CN2 |
|--------------------------------|---------------------------|---------------------|
| 33                             | 14                        | 60                  |
| 34                             | 13                        | 41                  |
| 35                             | 18                        | 42                  |
| 36                             | 17                        | 35                  |
| 37                             | 22                        | 8                   |
| 38                             | 21                        | 7                   |
| 39                             | 28                        | 14                  |
| 40                             | 27                        | 13                  |
| 41                             | 92                        | 98                  |
| 42                             | 91                        | 97                  |
| 43                             | 98                        | 102                 |
| 44                             | 97                        | 101                 |
| 45                             | 102                       | 83                  |
| 46                             | 101                       | 77                  |
| 47                             | 106                       | 78                  |
| 48                             | 105                       | 73                  |
| 49                             | 77                        | 74                  |
| 50                             | 78                        | 69                  |
| 51                             | 73                        | 70                  |
| 52                             | 74                        | 63                  |
| 53                             | 69                        | 64                  |
| 54                             | 70                        | 61                  |
| 55                             | 63                        | 62                  |
| 56                             | 64                        | 65                  |
| 57                             | 61                        | 66                  |
| 58                             | 62                        | 71                  |
| 59                             | 65                        | 72                  |
| 60                             | 66                        | 75                  |
| 61                             | 71                        | 76                  |
| 62                             | 72                        | 79                  |
| 63                             | 75                        | 80                  |
| 64                             | 76                        | 85                  |

**Remarks 1.** The emulation probe is the NP-64GB-TQ, H64GB-TQ, H64GK, H64GK-TQ, H64GC, H64GC-TQ, or H64GC-TQ.

The NP-64GB-TQ, H64GB-TQ, H64GK, H64GK-TQ, H64GC, H64GC-TQ, and H64GC-TQ are products of Naito Densetsu Machida Mfg. Co., Ltd.

- The numbers in the Emulation Probe Device Side column refer to the pin number of the target system.
- The numbers in the 78013X PROBE Board CN1 column refer to the 78013X PROBE Board pin to be connected to the emulation probe.
- The numbers in the IE-78K0K1-ET CN2 column refer to the IE-78K0K1-ET pin to be connected to the 78013X PROBE Board.

**Table A-5. Pin Correspondence of Emulation Probe**

| Emulation Probe<br>Device Side | IE-78K0K1-ET<br>CN6 | Emulation Probe<br>Device Side | IE-78K0K1-ET<br>CN2 |
|--------------------------------|---------------------|--------------------------------|---------------------|
| 1                              | 114                 | 41                             | 8                   |
| 2                              | 113                 | 42                             | 7                   |
| 3                              | 108                 | 43                             | 14                  |
| 4                              | 107                 | 44                             | 13                  |
| 5                              | 104                 | 45                             | 18                  |
| 6                              | 103                 | 46                             | 17                  |
| 7                              | 100                 | 47                             | 22                  |
| 8                              | 99                  | 48                             | 21                  |
| 9                              | 94                  | 49                             | 28                  |
| 10                             | 93                  | 50                             | 27                  |
| 11                             | 30                  | 51                             | 92                  |
| 12                             | 29                  | 52                             | 91                  |
| 13                             | 24                  | 53                             | 98                  |
| 14                             | 23                  | 54                             | 97                  |
| 15                             | 20                  | 55                             | 102                 |
| 16                             | 19                  | 56                             | 101                 |
| 17                             | 16                  | 57                             | 106                 |
| 18                             | 15                  | 58                             | 105                 |
| 19                             | 10                  | 59                             | 112                 |
| 20                             | 9                   | 60                             | 111                 |
| 21                             | 37                  | 61                             | 83                  |
| 22                             | 43                  | 62                             | 77                  |
| 23                             | 44                  | 63                             | 78                  |
| 24                             | 47                  | 64                             | 73                  |
| 25                             | 48                  | 65                             | 74                  |
| 26                             | 51                  | 66                             | 69                  |
| 27                             | 52                  | 67                             | 70                  |
| 28                             | 57                  | 68                             | 63                  |
| 29                             | 58                  | 69                             | 64                  |
| 30                             | 59                  | 70                             | 61                  |
| 31                             | 60                  | 71                             | 62                  |
| 32                             | 55                  | 72                             | 65                  |
| 33                             | 56                  | 73                             | 66                  |
| 34                             | 49                  | 74                             | 71                  |
| 35                             | 50                  | 75                             | 72                  |
| 36                             | 45                  | 76                             | 75                  |
| 37                             | 46                  | 77                             | 76                  |
| 38                             | 41                  | 78                             | 79                  |
| 39                             | 42                  | 79                             | 80                  |
| 40                             | 35                  | 80                             | 85                  |

- Remarks**
1. The emulation probe is the NP-80GC, NP-80GC-TQ, H80GC-TQ, H80GK, or H80GK-TQ.  
The NP-80GC, NP-80GC-TQ, H80GC-TQ, H80GK, and H80GK-TQ are products of Naito Densai Machida Mfg. Co., Ltd.
  2. The numbers in the Emulation Probe Device Side column refer to the pin number of the target system.
  3. The numbers in the IE-78K0K1-ET CN2 column refer to the IE-78K0K1-ET pin to be connected to the emulation probe.

## APPENDIX B INTERFACE BOARD

This chapter explains the settings when connecting the interface board to the IE-78K0K1-ET.

### B.1 General

The interface board included with the IE-78K0K1-ET is used mounted in the PCI slot of a PC in which Windows 95, Windows 98, Windows NT 4.0, or Windows 2000 is installed.

Although this interface board supports PCI Rev.2.2, operation with PCI Rev.2.1 causes no problem.

Hardware resources used:

|                   |                  |
|-------------------|------------------|
| I/O address       | 0000H to FFFFH   |
| Interrupt         | Not used         |
| Memory            | 80H bytes used   |
| Power consumption | +5V, 300 mA max. |

## B.2 Installation

This section explains the overall flow of installation.

Be sure to refer to the document in the CD-ROM for details of other OSs and descriptions.

### (1) Board setting

This interface board does not have jumpers and DIP switches.

### (2) Mounting on the host machine


Confirm that the power supply to the host machine is disconnected, then mount the interface board in the PCI bus slot, in accordance with the directions in the user's manual of the host machine.

When mounting, fix the host machine and interface board tightly with screws.

### (3) Installation of driver

Install the driver by Plug&Play.

**Figure B-1. Package Drawing of Interface Board**

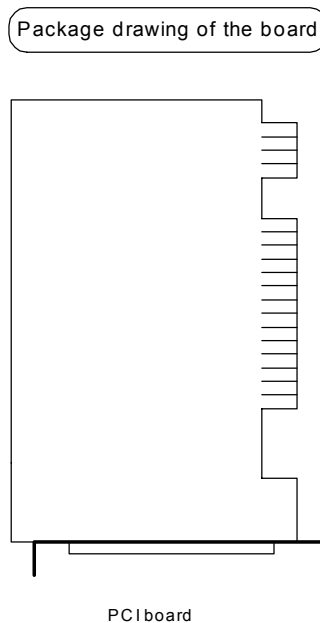

### B.2.1 Installing in Windows 98

This section explains the installation procedure when using Windows 98 with a PC/AT compatible machine or PC-9800 series computer as the host machine.

The procedure explained is applicable to any host machine model.

<Installation procedure>

**Remark** The CD-ROM drive is assumed as E: in the explanation below. If the NEC PC-9800 series is used, read E as C.

#### **Step 1 Shutdown Windows 98 and turn off the power of the computer.**

Shutdown Windows 98 and turn off the power of the host machine.

Furthermore, disconnect the power supply cable of the host machine to assure safety.

#### **Step 2 Connect the interface board to an open PCI card slot.**

Remove the cover of the host machine in accordance with the user's manual of the host machine, and connect the interface board to an open PCI card slot. At this time, be sure to fix them with screws tightly. In addition, check the connection again before mounting the cover.

#### **Step 3 Turn on the power to the host machine and activate Windows 98.**

Apply the power to the host machine and activate Windows 98.

#### **Step 4 Install the driver by Plug&Play of Windows 98.**

(1) While Windows 98 is being activated, the [Add New Hardware Wizard] window appears. Click [Next].

**Figure B-2**



(2) Select “Search for the best driver for your device. (Recommended)” and click [Next].

**Figure B-3**



(3) Insert the attached CD-ROM in the CD-ROM drive.


(4) Select "Specify a location:" and input "E:\ID78K0NS\driver\WIN9X\PCI-IF".

Alternately, click [Browse], select "E:\ID78K0NS\ driver \WIN9X\PCI-IF" from the drop-down list, and click [Next].

**Figure B-4**





**Figure B-5**

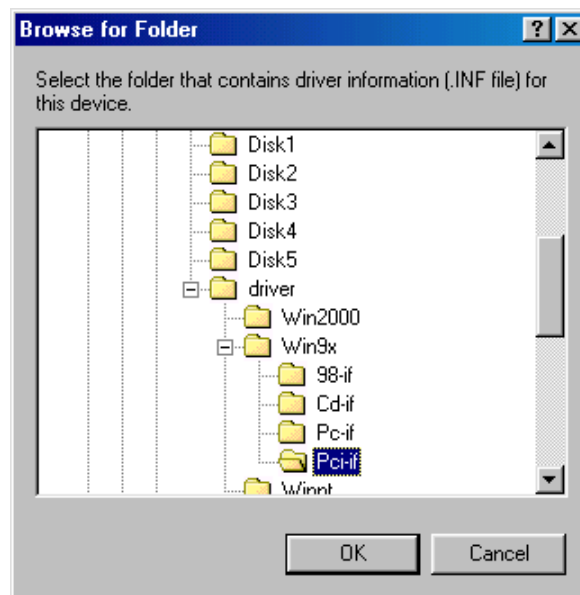


(5) Click [OK].

- (6) "NEC IE-PC Interface Card [PCI IF Card]" is displayed. Click [Next]. The necessary files are then automatically copied.

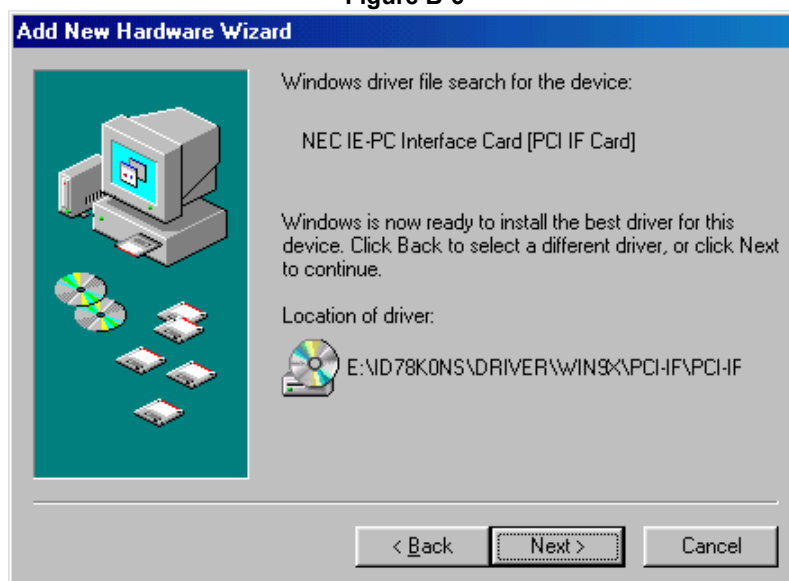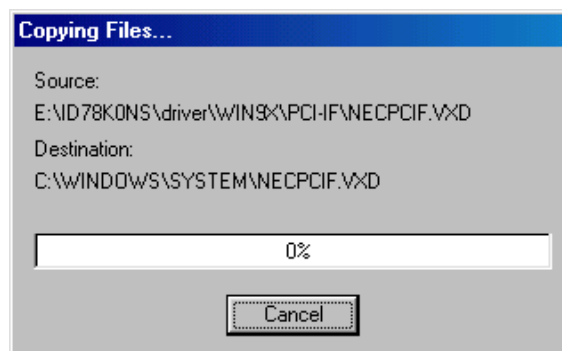**Figure B-6****Figure B-7**

(7) Installation is complete. Click [Finish]. Activation of Windows 98 then continues.

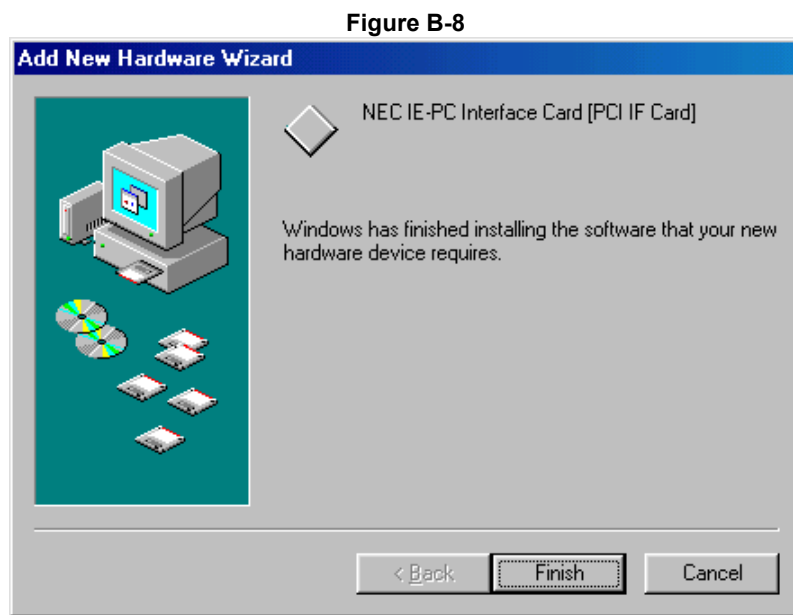

**Step 5 Completion of installing the IE-PC Driver.**

Installation of the driver is complete.

### B.2.2 Installing in Windows 2000

This section explains the installation procedure when using Windows 2000 with a PC/AT compatible machine or PC-9800 series computer as the host machine.

The procedure explained is applicable to any host machine model.

<Installation procedure>

**Remark** The CD-ROM drive is assumed as E: in the explanation below. If the NEC PC-9800 series is used, read E as C.

#### Step 1 Shutdown Windows 2000 and turn off the power of the computer.

Shutdown Windows 2000 and turn off the power of the host machine.

Furthermore, disconnect the power supply cable of the host machine to assure safety.

#### Step 2 Connect the interface board to an open PCI card slot.


Remove the cover of the host machine in accordance with the user's manual of the host machine, and connect the interface board to an open PCI card slot. At this time, be sure to fix them with screws tightly. In addition, check the connection again before mounting the cover.

#### Step 3 Turn on the power to the host machine and activate Windows 2000.

Apply the power to the host machine and activate Windows 2000.


#### Step 4 Install the driver by Plug&Play of Windows 2000.

(1) While Windows 2000 is being activated, the [Found New Hardware Wizard] window appears. Click [Next].

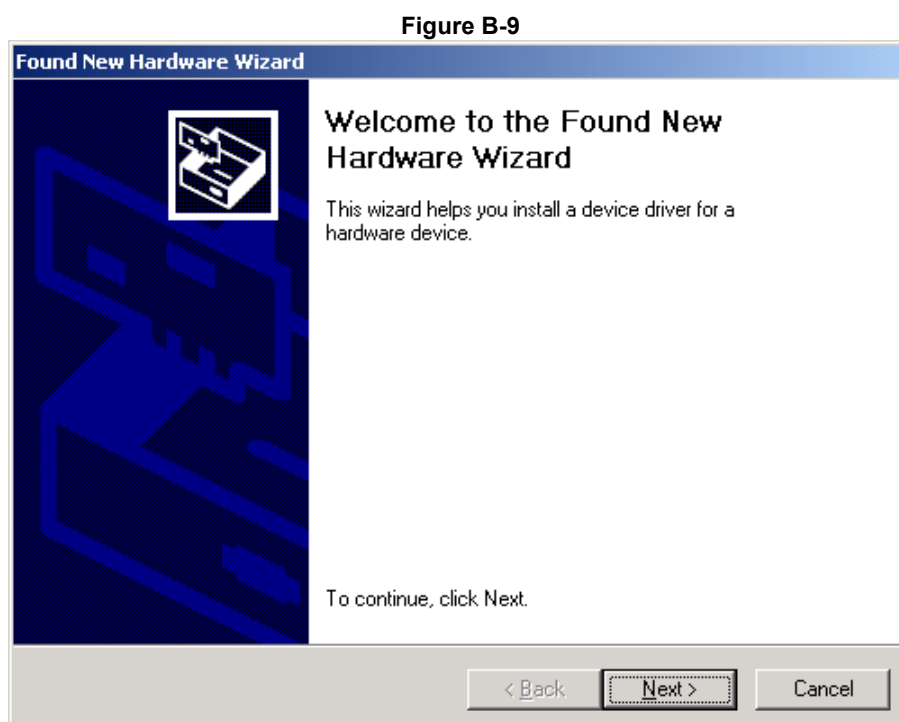


(2) Select “Search for a suitable driver for my device (recommended)” and click [Next].

**Figure B-10**

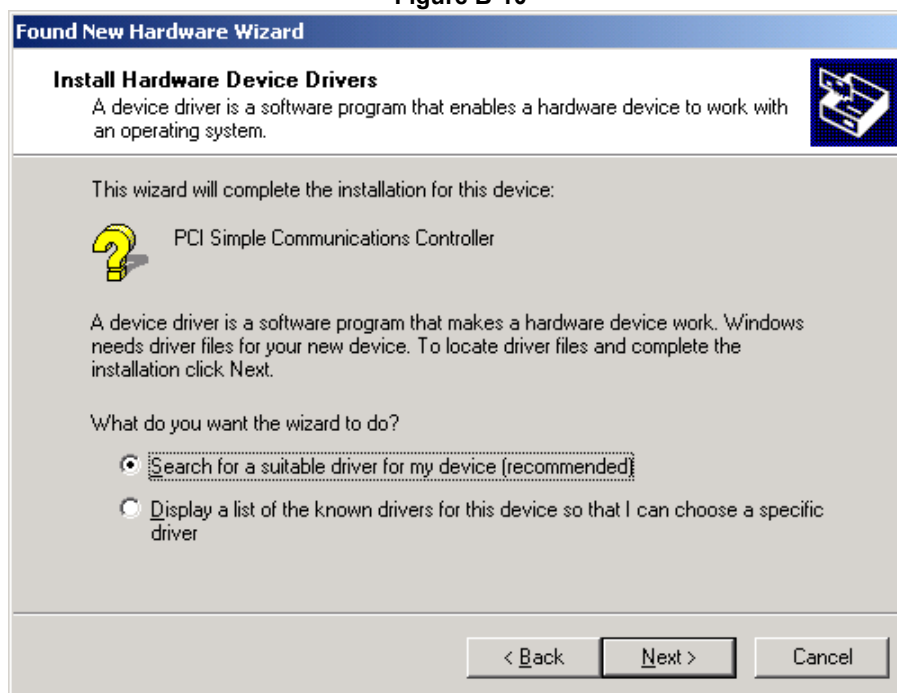


(3) Select “Specify a location” and click [Next].

**Figure B-11**

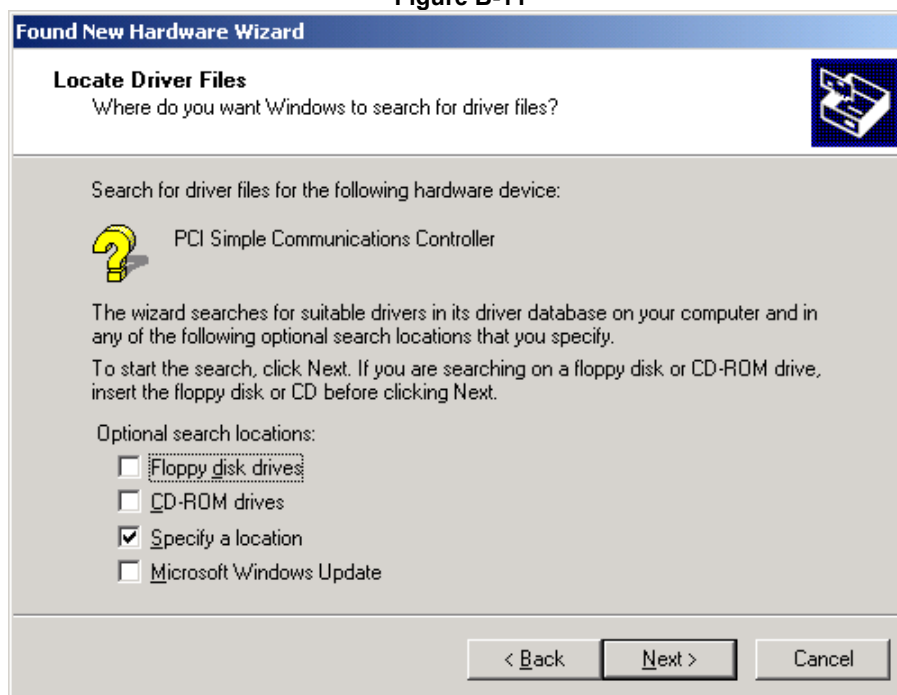


- (4) Insert the attached CD-ROM in the CD-ROM drive and input "E:\ID78K0NS\driver\WIN2000" in the "Copy manufacturer's files from:" field and click [OK].

Figure B-12

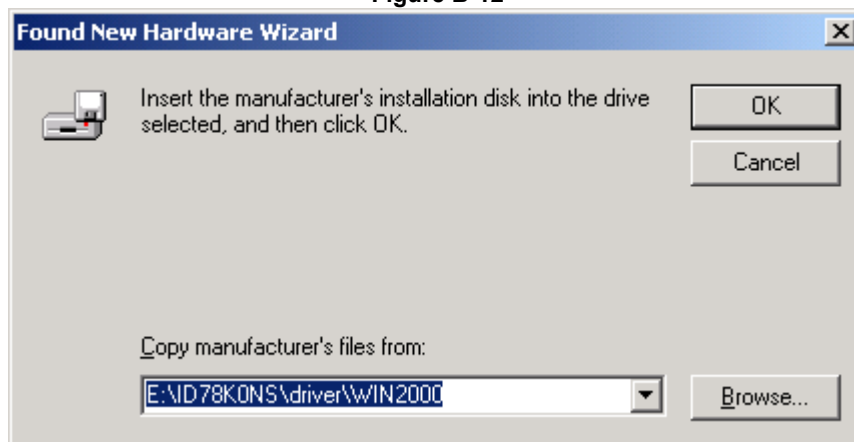


- (5) Click [Next].

Figure B-13

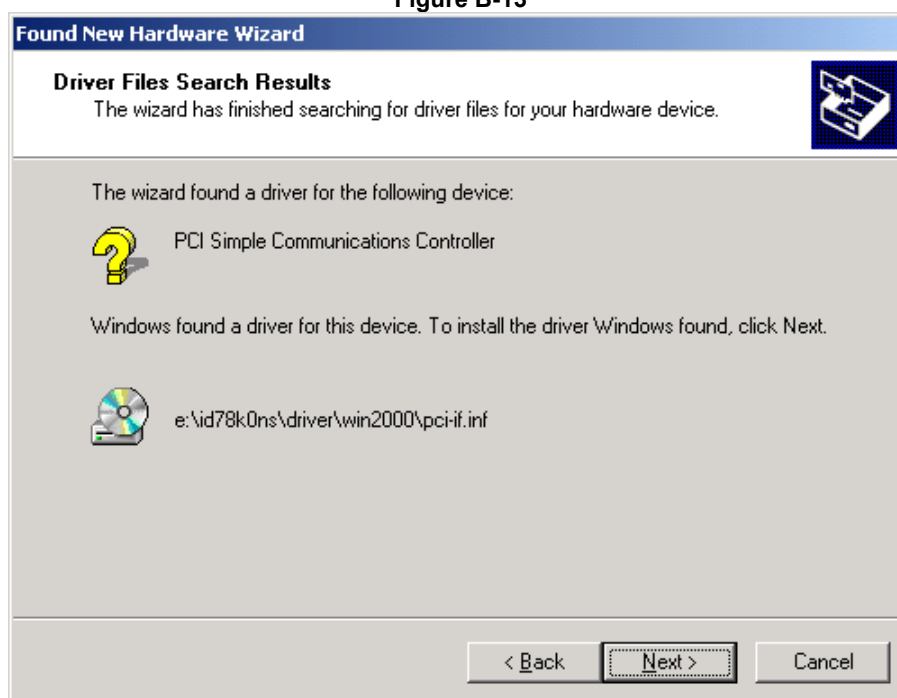


(6) The [Insert Disk] window is displayed. Click [OK].

**Figure B-14**

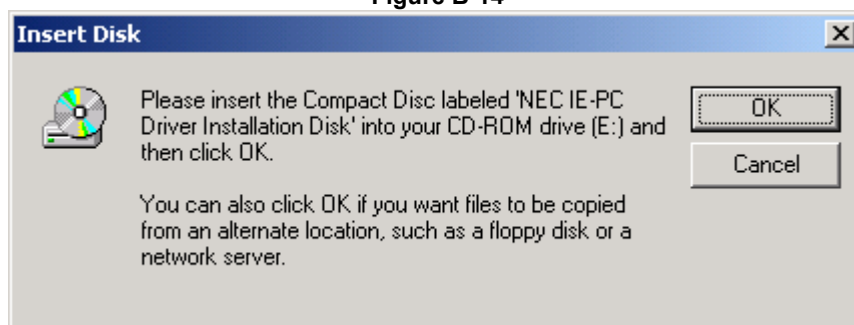


(7) The [Files Needed] window is displayed. Click [Browse] to open the [Locate File] window. Specify NECPCIF.SYS and click [Open].

**Figure B-15**

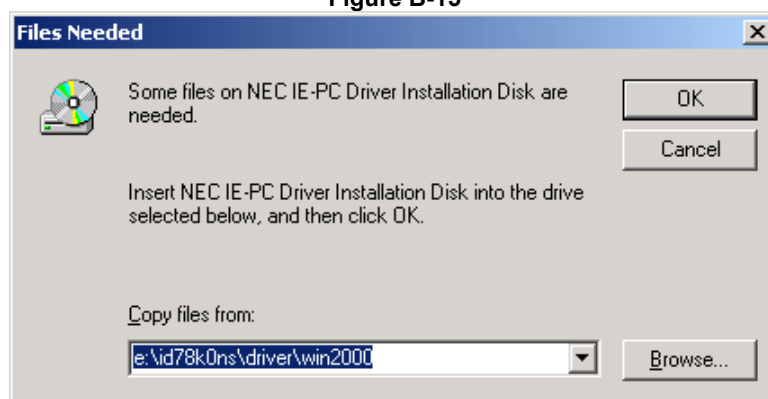


**Figure B-16**

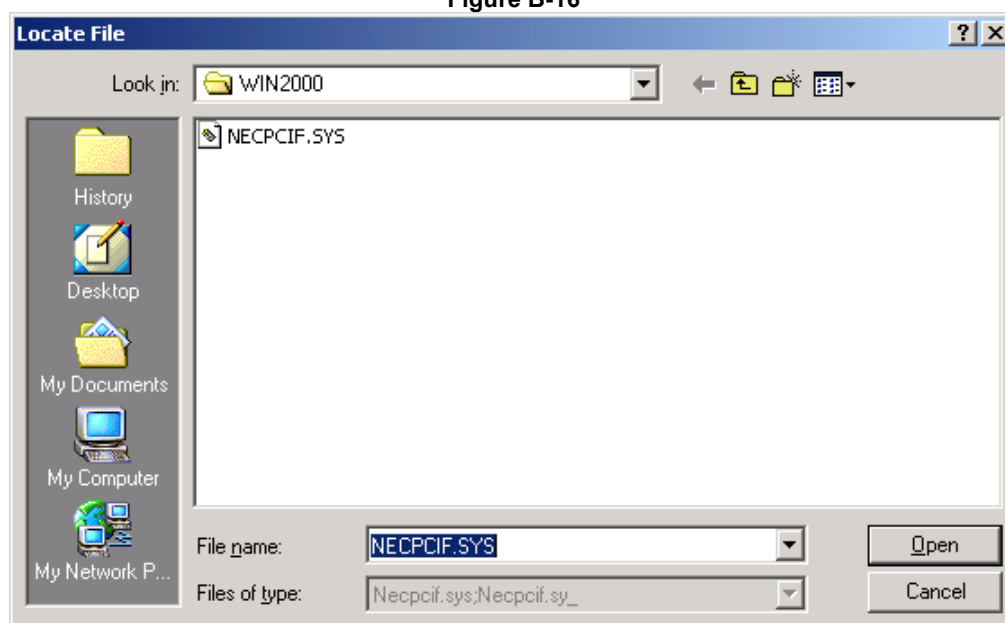


(8) The necessary files are automatically copied.

Figure B-17

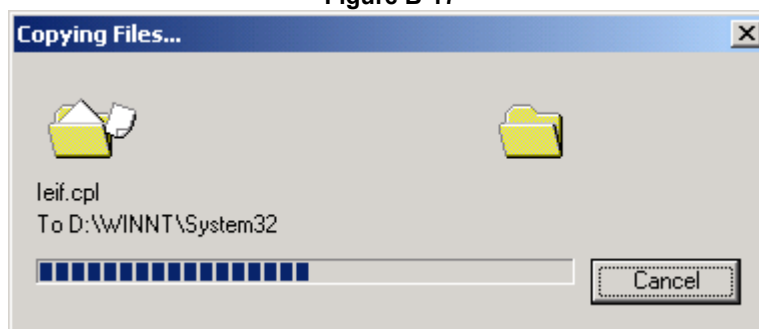

(9) The message "Completing the Found New Hardware Wizard" is displayed. Click [Finish]. Activation of Windows 2000 then continues.

Figure B-18

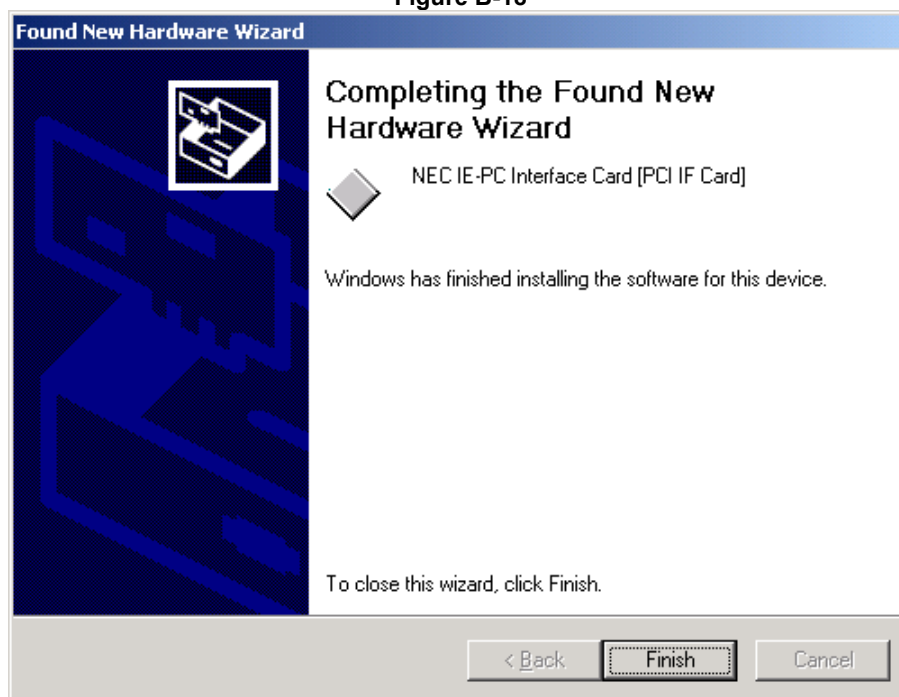

#### Step 5 Completion of installing the IE-PC Driver.

Installation of the driver is complete.