

2N2904 2N2904A
2N2905 2N2905A

PNP SILICON TRANSISTORS



TO-39 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N2904, 2N2905 series types are PNP silicon transistors manufactured by the epitaxial planar process, designed for small signal, general purpose and switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

	SYMBOL	2N2904 2N2905	2N2904A 2N2905A	UNITS
Collector-Base Voltage	V_{CBO}	60	60	V
Collector-Emitter Voltage	V_{CEO}	40	60	V
Emitter-Base Voltage	V_{EBO}		5.0	V
Continuous Collector Current	I_C		0.6	A
Power Dissipation	P_D		0.8	W
Power Dissipation ($T_C=25^{\circ}\text{C}$)	P_D		3.0	W
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +200		$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$)

SYMBOL	TEST CONDITIONS	2N2904 2N2905		2N2904A 2N2905A		UNITS
		MIN	MAX	MIN	MAX	
I_{CBO}	$V_{CB}=50\text{V}$	-	20	-	10	nA
I_{CEV}	$V_{CE}=30\text{V}, V_{EB}=0.5\text{V}$	-	-	-	50	nA
BV_{CBO}	$I_C=10\mu\text{A}$	60	-	60	-	V
BV_{CEO}	$I_C=10\text{mA}$	40	-	60	-	V
BV_{EBO}	$I_E=10\mu\text{A}$	5.0	-	5.0	-	V
$V_{CE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$	-	0.4	-	0.4	V
$V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$	-	1.6	-	1.6	V
$V_{BE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$	-	1.3	-	1.3	V
$V_{BE(SAT)}$	$I_C=500\text{mA}, I_B=50\text{mA}$	-	2.6	-	2.6	V
		2N2904 2N2904A		2N2905 2N2905A		
		MIN	MAX	MIN	MAX	
h_{FE}	$V_{CE}=10\text{V}, I_C=100\mu\text{A}$ (2N2904, 2N2905)	20	-	35	-	
h_{FE}	$V_{CE}=10\text{V}, I_C=100\mu\text{A}$ (2N2904A, 2N2905A)	40	-	75	-	
h_{FE}	$V_{CE}=10\text{V}, I_C=1.0\text{mA}$ (2N2904, 2N2905)	25	-	50	-	
h_{FE}	$V_{CE}=10\text{V}, I_C=1.0\text{mA}$ (2N2904A, 2N2905A)	40	-	100	-	
h_{FE}	$V_{CE}=10\text{V}, I_C=10\text{mA}$ (2N2904, 2N2905)	35	-	75	-	
h_{FE}	$V_{CE}=10\text{V}, I_C=10\text{mA}$ (2N2904A, 2N2905A)	40	-	100	-	
h_{FE}	$V_{CE}=10\text{V}, I_C=150\text{mA}$	40	120	100	300	
h_{FE}	$V_{CE}=10\text{V}, I_C=500\text{mA}$ (2N2904, 2N2905)	20	-	30	-	
h_{FE}	$V_{CE}=10\text{V}, I_C=500\text{mA}$ (2N2904A, 2N2905A)	40	-	50	-	

R2 (6-April 2015)

2N2904 2N2904A
2N2905 2N2905A


PNP SILICON TRANSISTORS



ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
f_T	$V_{CE}=20\text{V}$, $I_C=50\text{mA}$, $f=100\text{MHz}$	200		MHz
C_{ob}	$V_{CB}=10\text{V}$, $f=100\text{kHz}$		8.0	pF
t_{on}	$V_{CC}=30\text{V}$, $I_C=150\text{mA}$, $I_B=15\text{mA}$		45	ns
t_{off}	$V_{CC}=6.0\text{V}$, $I_C=150\text{mA}$, $I_{B1}=I_{B2}=15\text{mA}$		180	ns

TO-39 CASE - MECHANICAL OUTLINE

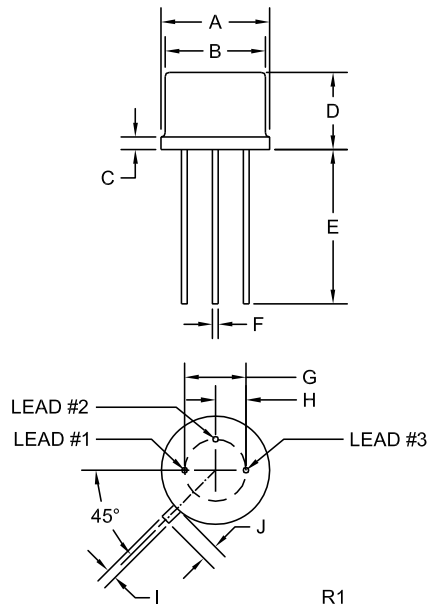

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.335	0.370	8.51	9.40
B (DIA)	0.315	0.335	8.00	8.51
C	-	0.040	-	1.02
D	0.240	0.260	6.10	6.60
E	0.500	-	12.70	-
F (DIA)	0.016	0.021	0.41	0.53
G (DIA)	0.200		5.08	
H	0.100		2.54	
I	0.028	0.034	0.71	0.86
J	0.029	0.045	0.74	1.14

TO-39 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING: FULL PART NUMBER

R2 (6-April 2015)

2N2904 2N2904A
2N2905 2N2905A

PNP SILICON TRANSISTORS



SERVICES

- Bonded Inventory
- Custom Electrical Screening
- Custom Electrical Characteristic Curves
- SPICE Models
- Custom Packaging
- Package Base Options
- Custom Device Development/ Multi Discrete Modules (MDM™)
- Bare Die Available for Hybrid Applications

LIMITATIONS AND DAMAGES DISCLAIMER: In no event shall Central be liable for any collateral, indirect, punitive, incidental, consequential, or exemplary damages in connection with or arising out of a purchase order or contract or the use of products provided hereunder, regardless of whether Central has been advised of the possibility of such damages. Excluded damages shall include, but not be restricted to: cost of removal or reinstallation, rework, ancillary costs to the procurement of substitute products, loss of profits, loss of savings, loss of use, loss of data, or business interruption. No claim, suit, or action shall be brought against Central more than two (2) years after the related cause of action has occurred.

In no event shall Central's aggregate liability from any warranty, indemnity, or other obligation arising out of or in connection with a purchase order or contract, or any use of any Central product provided hereunder, exceed the total amount paid to Central for the specific products sold under a purchase order or contract with respect to which losses or damages are claimed. The existence of more than one (1) claim against the specific products sold to Buyer under a purchase order or contract shall not enlarge or extend this limit.

Buyer understands and agrees that the foregoing liability limitations are essential elements of a purchase order or contract and that in the absence of such limitations, the material and economic terms of the purchase order or contract would be substantially different.

R2 (6-April 2015)